

ASPHERIC COEFFICIENTS

	R	k	A_4	A_6	A_8	A_{10}	A_{12}	A_{14}	A_{16}
S1	PLANO	-	-	-	-	-	-	-	-
S2	-0.840660	-0.963070	-9.476566E-02	-2.790461E-02	-5.415580E-03	-3.553653E-03	3.518929E-03	-	-

ASPHERIC LENS EQUATION

$$z = \frac{Y^2}{R(1+\sqrt{1-(1+k)Y^2/R^2})} + A_4Y^4 + A_6Y^6 + A_8Y^8 + A_{10}Y^{10} + A_{12}Y^{12} + A_{14}Y^{14} + A_{16}Y^{16}$$

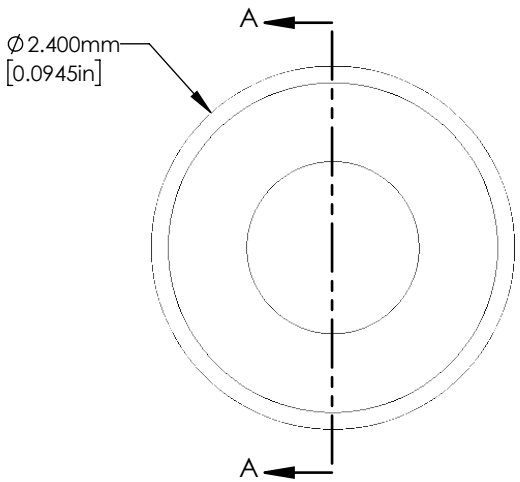

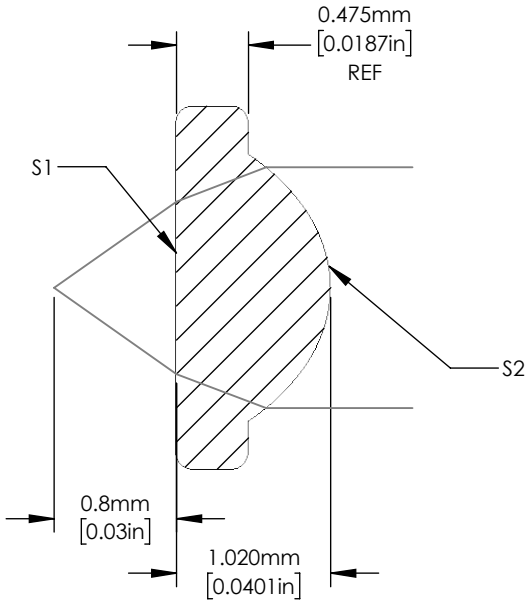

SECTION A-A

NOTES/SPECIFICATIONS:

1. MATERIAL: D-ZK3
2. REFRACTIVE INDEX: 1.586 @ 587.6nm
3. DESIGN WAVELENGTH: 780 nm
4. CLEAR APERTURE: (S1): ∅1.14 mm
   (S2): ∅1.60 mm
5. EFFECTIVE FOCAL LENGTH: 1.5 mm ±1.0%
6. NUMERICAL APERTURE: 0.58
7. DIAMETER TOLERANCE: ±0.015 mm
8. CENTER THICKNESS TOLERANCE: ±0.030 mm
9. SURFACE QUALITY: 40-20 SCRATCH-DIG (INCLUDES ENTIRE BULK MATERIAL)
10. RMS WFE: ≤ DIFFRACTION LIMITED
11. MAGNIFICATION: INFINITE
12. COATING(S1&S2): BBAR Ravg<0.5% FROM 350-700 nm, AOI=0°

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	GG	25/FEB/14
APPROVAL	JAC	18/DEC/23

COPYRIGHT © 2014 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

0.58 NA ASPHERIC LENS, f=1.5 mm, DW=780 nm, A COATED

MATERIAL	REV
SEE NOTES	C

ITEM #	APPROX WEIGHT
354140-A	0.01 g