PM400K3 - August 25, 2026

Item # PM400K3 was discontinued on August 25, 2026. For informational purposes, this is a copy of the website content at that time and is valid only for the stated product.

LIGHT ANALYSIS

Optical Power Meter Kits

- Kits Include Console, Sensor, and Post Assembly
- Touchscreen Digital Console
- Wavelengths from 190 nm to 20 µm
- Powers from 500 pW to 10 W



PM400K5
Digital Console
with Thermal Sensor

C-Series Connector



PM400K3
Digital Console with
Slim Photodiode Sensor

Related Items

Power and Energy Meters



USB Spectrometers



Wavemeters



Power and Energy Meter Interfaces



Features

- Includes Console, Sensor, and Mounting Components
- Console Compatible with C-Series Sensors
- Large, Easy-to-Read Touchscreen Digital Display
- USB 2.0 Port for Control via PC with Optical Power Monitor Software (See *Software* Tab)
- Rechargeable Battery
- 3.5 mm Jack (0 to 2 V) on Console for Monitoring Signal
- Recalibration Services Available

Our optical power meter kits consist of a console, a C-series photodiode or thermal power sensor, and a post mounting assembly. The sensor in each kit is paired with a PM400 touchscreen digital power meter console. For a full list of available kits, see Table 1.1.

The console has a USB 2.0 connection that allows it to be controlled remotely using a PC with the Optical Parameter Monitor software package installed (see the *Software* tab for details).

Table 1.1 Power Meter Kit Specifications

Item #	Power Range	Wavelength Range	Sensor Type	Console Type
PM400K1	50 nW - 50 mW	400 - 1100 nm	Si (S120C)	Touchscreen Digital (PM400)
PM400K2	500 nW - 500 mW	400 - 1100 nm	Si (S121C)	Touchscreen Digital (PM400)
PM400K3	500 pW - 500 mW[a]	400 - 1100 nm	Slim Si (S130C)	Touchscreen Digital (PM400)
PM400K4	50 nW - 40 mW	700 - 1800 nm	Ge (S122C)	Touchscreen Digital (PM400)
PM400K5	2 mW - 10 W	0.19 - 20 µm	Thermal (S425C)	Touchscreen Digital (PM400)

a. The S130C sensor features a sliding neutral density filter. Without the filter, the power measurement range is 500 pW to 5 mW, while with the filter, the range is 5 mW to 500 mW. The position of the ND filter is automatically detected by the power meter console.

PM400 Touchscreen Digital Console

The PM400 touchscreen digital power and energy meter console features a 4.3" display with multi-touch technology. Capacitive buttons on the front of the unit enable fast access to set the source wavelength or spectrum, a delta mode that shows the change in power from a user-selected set point, the zeroing function, and device main menu. In addition to pre-programming source wavelengths or spectra for calibrating measurements, users can enter and save up to twelve attenuation values or data files to correct for effects that external devices (such as filters or beamsplitters) may have on the power measurement.

A 14-pin auxiliary input allows users to connect their own humidity and temperature sensors as well as access four programmable I/O ports for controlling shutters, interlock devices, laser warning lights, and other common lab devices (see the *Pin Diagrams* tab for pin descriptions). Alternatively, a 2.5 mm stereo (3P) jack accepts the TSP-TH thermistor temperature probe. This console is compatible with all our C-Series sensors. For more information on the PM400 touchscreen digital console features, see the *Specs* tab, *Console Display* tab, or visit the full web presentation.

Additional Power Meter and Sensor Options

The power meter console and sensors in these kits can also be purchased individually. Our cornerstone PM100Dx Power and Energy Meter Consoles are not available as a kit, so the sensors must be purchased separately. Additionally, Thorlabs offers self-contained wireless power meters, designed for both handheld operation and remote control via Bluetooth or USB, and compact USB power meters, designed to be operated via software control on a PC.

Recalibration Services

Recalibration services are available for our photodiode and thermal power meter sensors and consoles. We recommend recalibrating your Thorlabs sensor and console as a pair; however, each may be recalibrated individually. All of the sensors on this page come with a manufacturer calibration by default, but we also offer an ISO 17025 accredited calibration for some items. For more information on calibration options, please see the *Recalibration* tab or the calibration sections at the bottom of this page.

Power Meter Selection Guide
Sensors
Photodiode Power Sensors
Thermal Power Sensors
Thermal Position & Power Sensors
Pyroelectric Energy Sensors
Power Meter Consoles and Interfaces
Digital Handheld Consoles
Analog Handheld Console
Touchscreen Handheld Console
Dual-Channel Benchtop Console
USB Interfaces with External Readout
Complete Power Meters
Power Meter Bundles
Wireless Power Meters with Sensors
Compact USB Power Meters
Field Power Meters for Terminated Fibers

Specs

Click here for the complete PM400 product presentation.

Specifications	
Compatible Detectors	Thorlabs' C-Series Photodiode, Thermal, and Pyroelectric Sensors Photodiodes up to 5 mA, Thermopiles up to 1 V, and Pyroelectric Detectors up to 100 V
Display	
Type	4.3" TFT, WQVGA, 400 x 272 Pixels, 16 Bit Color
Viewing Area	95 mm x 54 mm
Update Rate (Max)	10 Hz Numerical, 25 Hz Analog Simulation
Format	Numerical, Bar Graph, Trend Graph, Statistics, and Simulated Analog Needle
Backlight	LED, Adjustable
Features	Projected Capacitive Touchscreen and Buttons, Support Stand, Rubberized Outside, 2 x M3 Threaded Inserts for Mounting on Back Side
Analog Output	
Connector	3.5 mm Mono Audio (2P) Jack, Adapter to BNC Included
Signal	Amplified Input Signal - Not Corrected
Voltage Range	0 to 2 V
Accuracy	±3%
Bandwidth	Up to 100 kHz, Dependent on Sensor and Settings
Auxiliary Input/Output	
Connector	2 x 7 Pins, 0.1" Socket, Top Side
Function	4 x GPIO 2 x 10 bit ADC for External Temperature, Relative Humidity Sensor +3.3 V, +/- 2.5 V (100 mA Max)
Temperature Sensor Internal to C-Series Optical Sensor[a]	
Temperature Sensor Type	Thermistor
Temperature Measurement Range	-10 °C to 80 °C
External Temperature Sensor	
Supported Temperature Sensor	Thermistor NTC 0.1 - 100 kΩ, B-Value 1000 - 9999 K
Temperature Measurement Range	-10 °C to 80 °C (with TSP-TH)
Connector	2.5 mm Stereo Audio (3P) Jack
Sound	
Type	Internal Speaker
Function	Laser Tuning Support, Console Function Support
Memory	
Type	NAND Flash
Size	4 GB
Interfaces	
Type	USB 2.0
Connector	Mini-B USB
Power Management	
Battery	LiPo 3.7 V 2600 mAh
Charger	Built In; Charging Current: 0.5 / 1 A
Power Connector	Mini USB
General	
Operating Temperature Range[b]	0 to 40 °C
Storage Temperature Range	-40 to 70 °C
Dimensions	136 mm x 96 mm x 29 mm


Specifications	
Weight	0.35 kg

a. Many of Thorlabs' compatible C-Series optical power and energy sensors have a built-in temperature sensor.
b. Non-Condensing

PM400 Power Meter Console Display

Touchscreen Power Meter Console Front Panel

Thorlabs' PM400 Power Meter Console features a front panel with several key elements, as shown in the photo to the right. The projected capacitive touchscreen and buttons are sensitive enough to allow smooth operation even when the user wears cotton, latex, or nitrile gloves, but durable enough to be cleaned with standard screen cleaning solvents.

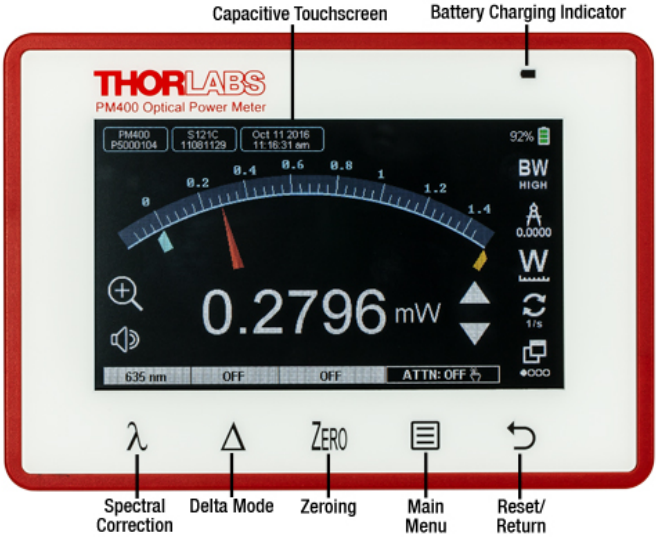

The Front Panel of the Touchscreen Power Meter Console

- **Capacitive Touchscreen:** The capacitive touchscreen allows the user to control the console functions with finger taps and swipes. Features include numerical displays of power and energy measurements, logging of long-term measurements, settings for a calibration wavelength or a preset attenuation value, and temperature monitoring. The user can switch measurement views by swiping one finger over the screen to the left or right, or by tapping the window icon in the lower right corner of the screen. More details on the measurement options are provided below.
- **Spectral Correction Button:** This button opens a screen where the user can quickly select or save up to 12 measurement wavelengths. The PM400 will use this wavelength setting in conjunction with the calibration data recorded in the connector of Thorlabs' power and energy sensors in order to provide a calibrated optical power or energy reading. The selected wavelength is displayed above the button.
- **Delta Mode:** In delta mode, the console will display the power or energy relative to a user selected setpoint. Pressing this button saves the current power or energy reading as the reference value, and subsequent measurements will be displayed as the difference between the actual value and the reference. The reference value is displayed above this button when Delta Mode is active.
- **Zeroing:** Quickly set the current power or energy value as the zero point for subsequent measurements. The measured power or energy when the console is zeroed will be displayed above the Zero button.
- **Main Menu:** This button provides quick access to the main menu. From here, the user can access a submenu to set the parameters for long-term power measurements, device settings, the file manager, sensor info, and the laser calculator. Details are provided below.

Additional Features


In addition to allowing users to select different measurement modes and settings, the PM400 incorporates other features to allow users to customize the interface.

- **Language Settings:** English, French, German, and Chinese can be selected.
- **Display Brightness and Contrast:** In addition to adjusting these settings, the user can choose whether to have the display show white text on a black background, or black text on a white background.
- **Laser Tuning Sound:** The console plays an audible tone to aid in identifying when peak power is achieved while tuning a laser. The console will beep repeatedly, with the frequency of the beep increasing as the measured power increases.
- **Programmable I/O Ports:** The PM400 features four programmable I/O ports for controlling shutters, interlocks, laser warning lights, etc.

The Touchscreen Display

The screenshots below provide an overview of some of the measurement views, measurement settings, functions, and calculators accessible through the touchscreen display.

Numerical Display

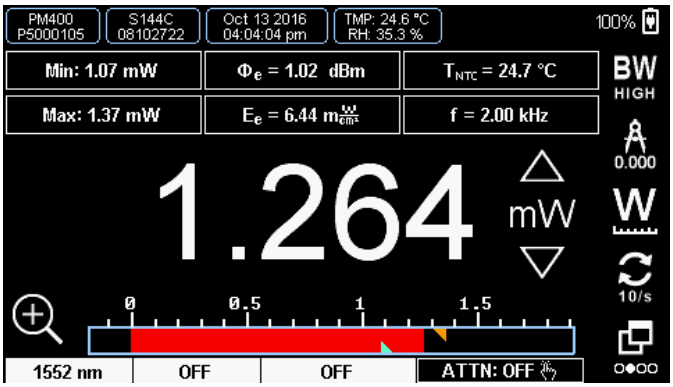


Subpanel Display Options		
Photodiode Sensors	**Thermal Sensors**	**Pyroelectric Sensors**
Current (I_{DET})	Voltage (V_{DET})	Voltage (V_{DET})
Power (Φ_e)	Power (Φ_e)	Energy (W_{DET})
Power in dBm (Φ_e)	Power in dBm (Φ_e)	N/A
Max	Max	Max
Min	Min	Min
Ratio (Max/Min)	Ratio (Max/Min)	Ratio (Max/Min)
Sensor Temperature[a]	Sensor Temperature[a]	N/A
Frequency	Frequency	Frequency

Subpanel Display Options		
External NTC Temperature	External NTC Temperature	External NTC Temperature
Irradiance (E_e)	Irradiance (E_e)	Fluence (H_e)

a. Many, but not all, of Thorlabs' compatible optical power sensors have an internal temperature sensor. This subpanel display option is only available if this internal temperature sensor is detected by the PM400.


The numerical display shows a digital measurement of the power or energy with a bar graph along the bottom. The orange and blue triangles on the bar graph show the min and max values detected during the measurement. To reset the min and max values, press the reset button on the front panel. The six rectangular subpanels immediately above the power or energy measurement are configurable displays, allowing the user to select which parameters to view. The Subpanel Display Options table provides a summary of available settings for each style of detector.

Simulated Analog Needle

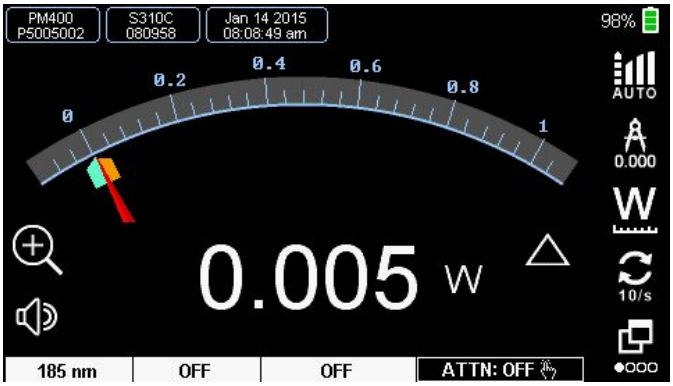


Measurements can be viewed with a simulated analog needle. The orange and blue marks are indicators for the max and min measured power, and the scale can be zoomed by a factor of 10. Icons down the side of the screen allow the user to set the bandwidth, adjust the resolution of the digital value at the bottom of the display, change units, adjust the display update rate or change screens.

Graph View

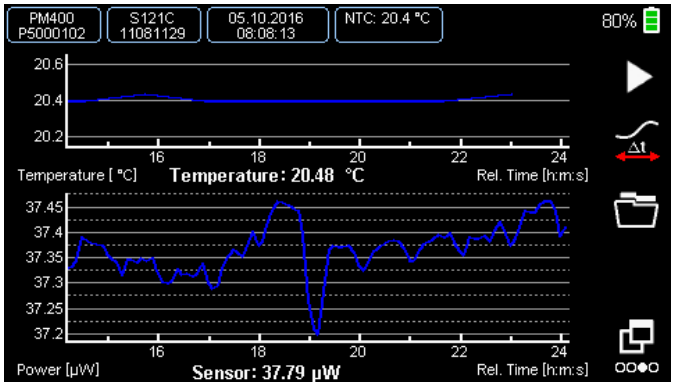

In the graph view, the user can monitor the optical power or energy of a source as it changes over time. A second, optional display can be added that shows the readout from a connected temperature sensor (the upper graph in the screenshot above). Icons on the side of the window allow the user to start and stop the measurement, scroll through the data, and open the folder where the measurement is saved.

Statistics Display

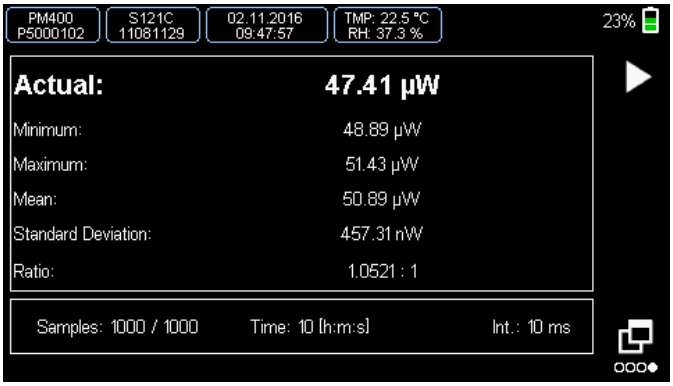

In the statistics display, the user can start a sequential measurement. The sample rate and duration can be adjusted from the Capture Settings screen, accessible from the main menu. The bottom bar of the display shows the number of measurements taken, total elapsed time since the measurements were started, and the measurement interval. The main part of the display shows statistics for the accumulated measurements, including the minimum, maximum, mean, and standard deviation.


Spectral Correction




This mode can be entered by pressing the λ symbol on the front panel. The unit can store up to 12 preset spectral correction entries, editable by the user. In their simplest form, these entries can consist of a single user-entered wavelength that will be used in conjunction with the NIST-traceable calibration data from a Thorlabs' sensor to produce a calibrated power measurement. Alternatively, each entry can be a .csv file with the source spectrum that has been uploaded and saved. When a spectral correction entry is selected, the entry name will be displayed in the field above the spectral correction button.

Attenuation Correction

Main Menu

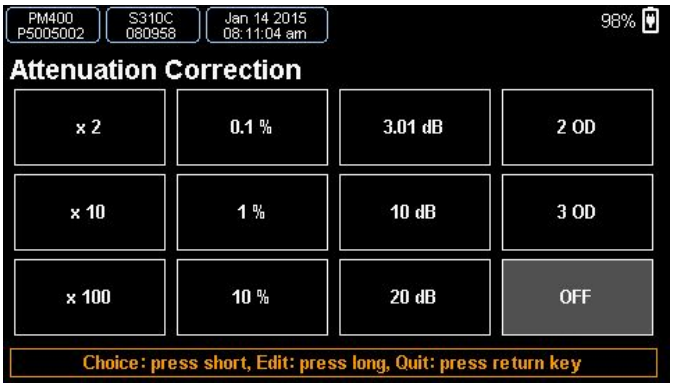


External devices within a setup, such as a filter or beamsplitter, may be needed to attenuate the signal being measured. The attenuation correction function allows the PM400 to display a power reading that accounts for these sources of attenuation. Attenuation values can be assigned as a multiplier (e.g. x2), in percent, in dB, or in OD (optical density). Alternatively, complete filter transmission curves can be uploaded and saved. Up to 12 different attenuation settings can be programmed and stored.

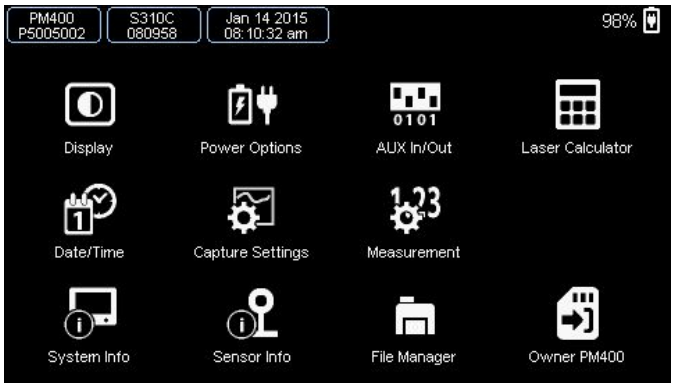


The PM400 main menu allows access to device features including the screen brightness, the menus to set the parameters for power, energy, and temperature measurements, a screen for calculating laser pulse characteristics, and a unit converter.

Capture Settings

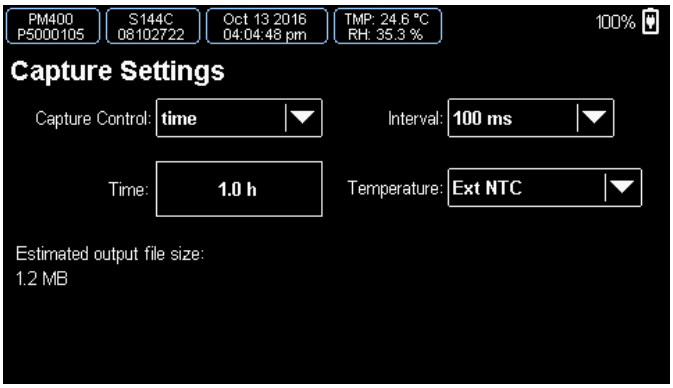


This screen allows the user to set the parameters for taking data. User-selectable settings include manual or automatic data acquisition, the exposure time, the number of samples, and the capture interval. It also allows the temperature logging parameters to be set. Once all of the settings are selected, this screen will return an estimated file size so that the user can ensure there is enough free memory on the device. In the case of manual operation (the user manually starts and stops the measurement), the estimated output file size will be the rate at which memory is used up as the data is collected.

Sensor Measurement Settings

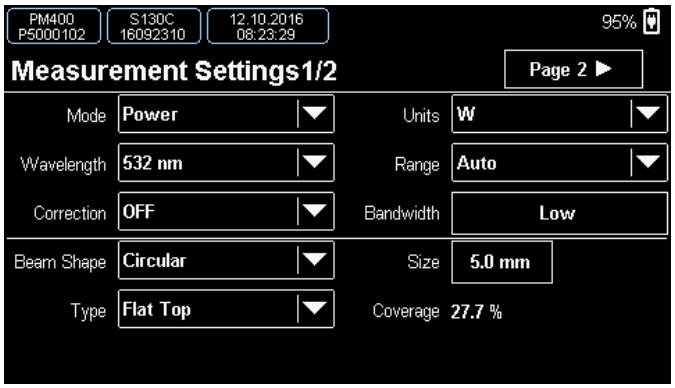


This screen allows the user to view sensor-dependent content, adjust common settings such as wavelength, attenuation, mode, etc., and enter beam parameters.

Temperature Sensor Settings

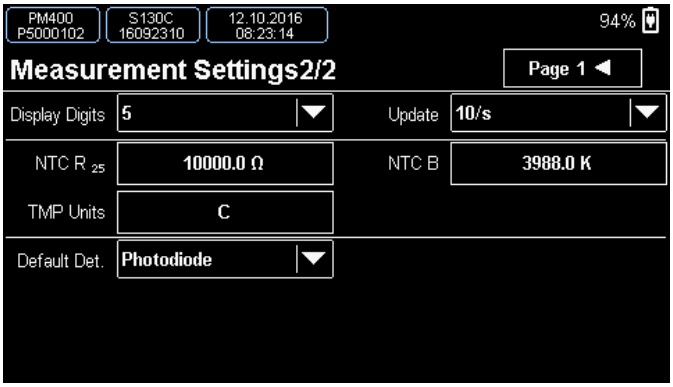

If an external temperature sensor is hooked up to the PM400, the user can adjust the parameters here.

Laser Calculator and Unit Converter

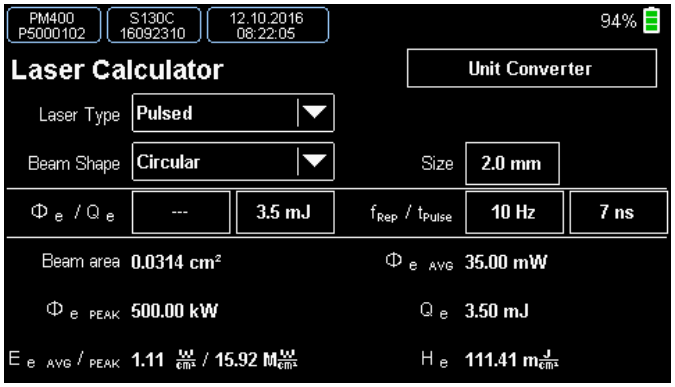


The PM400 has several calculators. The laser calculator screen allows the user to calculate laser beam parameters based on available inputs. A unit converter provides quick conversions between Watts and dBm or between wavelength, frequency, wavenumbers, and photon energy.

Pin Diagrams

PM400 Power Meter Console

Optical Sensor Head Input

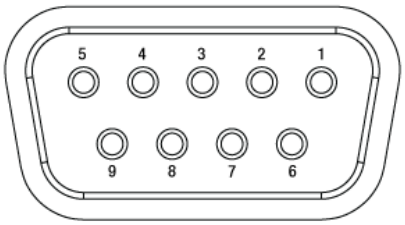


9-Pin Female D-Sub

Pin	Connection
1	+5 V (100 mA Max Current from This Pin)
2	DO NOT USE[a]
3	AGND (Analog Ground): Photodiode Ground (Anode), Thermal and Pyroelectric Sensor Ground
4	Photodiode Cathode
5	Pyroelectric Sensor +
6	DGND (Digital Ground)
7	Present: Connect this Pin via a 1 kΩ to 10 kΩ Resistor to Pin 3 (AGND) to Enable a Custom Sensor
8	Thermal Sensor +
9	Not Connected

a. Pin 2 is reserved for the EEPROM Digital I/O (memory in Thorlabs' sensor heads) and **MUST NOT** be used to connect anything other than a C-Series sensor. Connecting this pin may cause the console to malfunction.


Auxiliary Connector

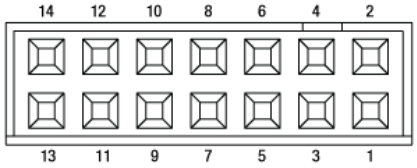

14-Pin Dual-In-Line Socket, 0.1" (2.54 mm) Pitch


Pin	Connection
1	Ground
2	+3.3 VDC, 0.1 A
3	Do Not Use (No Function)
4	ADC Current In (Humidity Sensor)
5	Temp / Humidity Detection Module
6	ADC Current In (Temperature Sensor)
7	GPIO 02
8	GPIO 01
9	GPIO 03
10	GPIO 04
11	Ground
12	+ 2.5 VDC, 0.05 A
13	Ground
14	-2.5 VDC, 0.05 A

Computer Connection USB Type Mini-B




USB Type Mini-B for Remote Control and Charging, Cable Included

Analog Output



0 to 2 V, 3.5 mm Mono Audio (2P) Jack

Temperature Sensor Input



2.5 mm Stereo Audio (2P) Jack for NTC

Software

Optical Parameter Monitor

The Optical Parameter Monitor GUI software features readout from up to eight power meters or other compatible devices, or remote wireless operation.

For details on specific software features, please see the user manual.

Users interested in the legacy Power Meter Software can find it by visiting the software page.

The PM100D2 and PM100D2 are only compatible with version 7.0. The PM101 Series Power Meters are only compatible with version 2.0 or later. The PM102 Series Power Meters are only compatible with version 2.1 or later. The PM103 Series Power and Energy Meters are only compatible with version 3.0 or later. The PM5020 Console is only compatible with version 4.0 or later. The PM60 and PM61 Power Meter Series are only compatible with version 6.0 or later.

Software Page

Compatible Power Meters

- Consoles:
  - PM100A Analog Power and Energy Meter Console
  - PM200 Legacy Touch Screen Power and Energy Meter Console
  - PM100D Legacy Digital Power and Energy Meter Console
  - PM100D2 and PM100D3 Digital Power and Energy Meter Consoles (Version 7.0)
  - PM400 Capacitive Touchscreen Power and Energy Meter Console
  - PM5020 Dual-Channel Benchtop Optical Power and Energy Meter Console (Version 4.0 or Later)
- Complete Power Meters:
  - PM160, PM160T, and PM160T-HP Wireless Handheld Power Meters with Bluetooth® Technology
  - PM16 Series Compact USB Power Meters
  - PM60 and PM61 Fiber Optic Power Meter Series (Version 6.0 or Later)
- Interfaces:
  - PM101 Series Power Meter Interfaces with External Readout (Version 2.0 or Later)
  - PM102 Series Power Meter Interfaces with External Readout (Version 2.1 or Later)
  - PM103 Series Power Meter Interfaces with External Readout (Version 3.0 or Later)
  - PM100USB USB Interface Digital Power and Energy Meter

Other Compatible Devices

- ERM2xx Series Extinction Ratio Meters
- SPCNT Single Photon Counting Device
- TSP01 USB Temperature and Humidity Data Logger
- TSP-TH Additional Temperature Probe
- WM202 Wavelength Meter

Optical Parameter Monitor GUI Software for Touchscreen, Handheld, and USB-Interface Power Meters

Features

- Operate up to Eight Devices Simultaneously
- Record and Analyze Measurements in Real Time
- Intuitive Analog Display and Graphing Modes
- Configurable Long-Term Data Logging
- Also Supports Position Measurements with Thermal Position & Power Sensors
- Compatible with USB, Bluetooth®, Ethernet, and Serial Connections

The Optical Parameter Monitor (OPM) software GUI enables seamless control of up to eight compatible devices that are connected via USB, RS232, Ethernet, or Bluetooth®,[a] wireless technology[b]. The latest software, firmware, drivers, and utilities for these power meters can be downloaded here.

Multiple data measurement and analysis functions are integrated into the GUI package. The interface offers a user-friendly design with minimal use of color and low brightness that is ideal for use in dark lab environments while wearing laser safety glasses. Measured data can be displayed in real time as a simulated analog needle, digital value, line graph, or bar graph. Continuously logged and short-term measurements can be recorded for data viewing and analysis at a later point. A built-in statistics mode analyzes measured data and updates continuously to reflect new measurements within the pre-determined measurement period. Beam position measurements are also supported when used with our thermal position and power sensors and a compatible power meter.

The OPM software package installs the GUI, which then can be used to control the touchscreen, handheld, or USB-interface power meters and other compatible devices. Firmware updates for supported devices are also available. Programming examples and drivers for interfacing with our power and energy meter consoles using LabVIEW, C/C++, Visual C#, and Python are installed with the software.

Please note that the OPM Software uses different drivers than the Power Meter Utilities Software and Thorlabs recommends using the new driver TLPM.dll. For users who wish to use the legacy Power Meter Software or use custom software designed using the older PM100D.dll driver, a Power Meter Driver Switcher program is included for easy swapping of the installed driver between the two versions.

a. Bluetooth is a registered trademark of Bluetooth Sig, Inc.

b. The PM100D3, PM61 Series, PM160, PM160T, and PM160T-HP power meters are equipped with Bluetooth connections.



Figure 149A Measurement Mode Set up and configure up to eight power meters.



Figure 149B Tuning Mode
Simulated analog needle and digital measurement value provided. Delta Mode, enabled here, shows the fluctuation range during the measurement period.

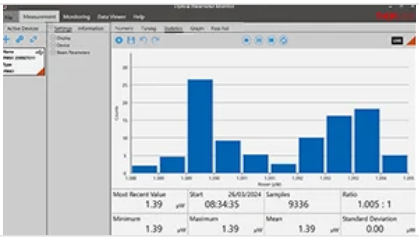


Figure 149C Statistics Mode
Calculate numerical statistics for a pre-determined measurement period. The panel displays the analyzed values in a bar graph and the results as numerical values.

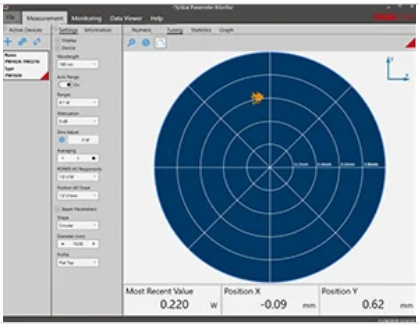


Figure 149D Position Tuning Mode
Tuning mode can be used with a thermal position and power sensor to aid in beam alignment, if the connected power meter supports it.

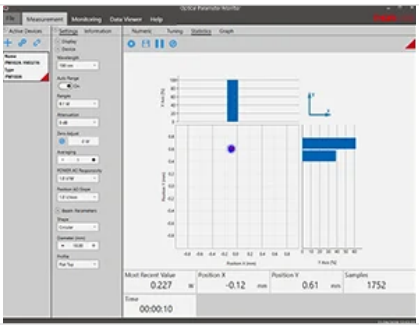


Figure 149E Position Statistics Mode
Statistics mode also provides aggregate information for thermal position and power sensors, if they are supported.


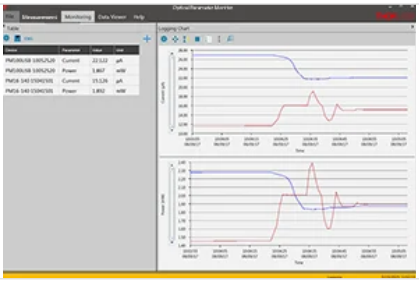


Figure 149F Monitoring Mode
Enable long-term measurement and simultaneous recording from up to eight power meters. Save data as .csv files for later processing while measurement results are displayed in a graph in real time.

Pulsed Laser Emission: Power and Energy Calculations

Determining whether emission from a pulsed laser is compatible with a device or application can require referencing parameters that are not supplied by the laser's manufacturer. When this is the case, the necessary parameters can typically be calculated from the available information. Calculating peak pulse power, average power, pulse energy, and related parameters can be necessary to achieve desired outcomes including:



- Protecting biological samples from harm.
- Measuring the pulsed laser emission without damaging photodetectors and other sensors.
- Exciting fluorescence and non-linear effects in materials.

Pulsed laser radiation parameters are illustrated in Figure 170A and described in Table 170B. For quick reference, a list of equations is provided below. The document available for download provides this information, as well as an introduction to pulsed laser emission, an overview of relationships among the different parameters, and guidance for applying the calculations.

Equations:

Period and *repetition rate* are reciprocal: $\Delta t = \frac{1}{f_{rep}}$ and $f_{rep} = \frac{1}{\Delta t}$

Pulse energy calculated from *average power*: $E = \frac{P_{avg}}{f_{rep}} = P_{avg} \cdot \Delta t$

Average power calculated from *pulse energy*: $P_{avg} = \frac{E}{\Delta t} = E \cdot f_{rep}$

Peak pulse power estimated from *pulse energy*: $P_{peak} \approx \frac{E}{\tau}$

Peak power and *average power* calculated from each other:

$$P_{peak} = \frac{P_{avg}}{f_{rep} \cdot \tau} = \frac{P_{avg} \cdot \Delta t}{\tau} \quad \text{and} \quad P_{avg} = P_{peak} \cdot f_{rep} \cdot \tau = \frac{P_{peak} \cdot \tau}{\Delta t}$$

Peak power calculated from *average power* and *duty cycle**:

$$P_{peak} = \frac{P_{avg}}{\tau/\Delta t} = \frac{P_{avg}}{duty\ cycle}$$

*Duty cycle ($\tau/\Delta t$) is the fraction of time during which there is laser pulse emission.

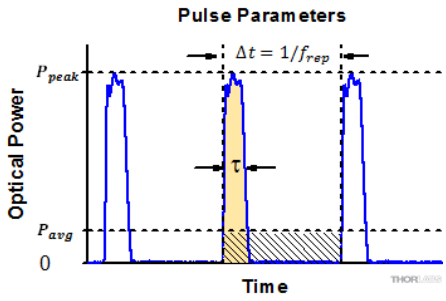


Figure 170A Parameters used to describe pulsed laser emission are indicated in this plot and described in Table 170B. **Pulse energy** (**E**) is the shaded area under the pulse curve. Pulse energy is, equivalently, the area of the diagonally hashed region.

Example Calculation:

Is it safe to use a detector with a specified maximum peak optical input power of **75 mW** to measure the following pulsed laser emission?

- Average Power: 1 mW
- Repetition Rate: 85 MHz
- Pulse Width: 10 fs

The energy per pulse:

$$E = \frac{P_{avg}}{f_{rep}} = \frac{1\ mW}{85\ MHz} = \frac{1\ x\ 10^{-3} W}{85\ x\ 10^{6} Hz} = 1.18\ x\ 10^{-11} J = 11.8\ pJ$$

seems low, but the peak pulse power is:

$$P_{peak} = \frac{P_{avg}}{f_{rep} \cdot \tau} = \frac{1\ mW}{85\ MHz \cdot 10\ fs} = 1.18\ x\ 10^{3}\ W = \mathbf{1.18\ kW}$$

It is ***not safe*** to use the detector to measure this pulsed laser emission, since the peak power of the pulses is >5 orders of magnitude higher than the detector's maximum peak optical input power.

Table 170B Pulse Parameters

Parameter	Symbol	Units	Description
Pulse Energy	E	Joules [J]	A measure of one pulse's total emission, which is the only light emitted by the laser over the entire period. The pulse energy equals the shaded area, which is equivalent to the area covered by diagonal hash marks.
Period	Δt	Seconds [s]	The amount of time between the start of one pulse and the start of the next.
Average Power	P_{avg}	Watts [W]	The height on the optical power axis, if the energy emitted by the pulse were uniformly spread over the entire period.
Instantaneous Power	P	Watts [W]	The optical power at a single, specific point in time.
Peak Power	P_{peak}	Watts [W]	The maximum instantaneous optical power output by the laser.
Pulse Width	τ	Seconds [s]	A measure of the time between the beginning and end of the pulse, typically based on the full width half maximum

Table 170B Pulse Parameters			
Parameter	Symbol	Units	Description
			(FWHM) of the pulse shape. Also called **pulse duration**.
Repetition Rate	f_{rep}	Hertz [Hz]	The frequency with which pulses are emitted. Equal to the reciprocal of the period.

Console Selection

Thorlabs offers a wide selection of power and energy meter consoles and interfaces for operating our power and energy sensors. Key specifications of all of our power meter consoles and interfaces are presented in this tab to help you decide which device is best for your application. We also offer self-contained wireless power meters and compact USB power meters.

When used with our C-series sensors, Thorlabs' power meter consoles and interfaces recognize the type of connected sensor and measure the current or voltage as appropriate. Our C-series sensors have responsivity calibration data stored in their connectors. The console will read out the responsivity value for the user-entered wavelength and calculate a power or energy reading.

- Photodiode sensors deliver a current that depends on the input optical power and the wavelength. The current is fed into a transimpedance amplifier, which outputs a voltage proportional to the input current. The photodiode's responsivity is wavelength dependent, so the correct wavelength must be entered into the console for an accurate power reading. The console reads out the responsivity for this wavelength from the connected sensor and calculates the optical power from the measured photocurrent.
- Thermal sensors deliver a voltage proportional to the input optical power. Based on the measured sensor output voltage and the sensor's responsivity, the console will calculate the incident optical power.
- Thermal position and energy sensors incorporate four thermopiles arranged as quadrants of a square. By comparing the voltage output from each quadrant, the unit calculates the beam's position.
- Energy sensors are based on the pyroelectric effect. They deliver a voltage peak proportional to the pulse energy. If an energy sensor is recognized, the console will use a peak voltage detector, and the pulse energy will be calculated from the sensor's responsivity.

The consoles and interfaces are also capable of providing a readout of the current or voltage delivered by the sensor. Select models also feature an analog output.

Consoles

Item #	PM100A	PM100D2	PM100D3	PM400	PM5020
(Click Photo to Enlarge)					
Sensor Compatibility (Sensors Not Included)					
Photodiode Power	✓	✓	✓	✓	✓
Thermal Power	✓	✓	✓	✓	✓
Thermal Position & Power	-	-	✓	✓	✓
Pyroelectric Energy	-	✓	✓	✓[a]	✓
Key Features					
Housing Dimensions (H x W x D)	7.24" x 4.29" x 1.61" (184 mm x 109 mm x 41 mm)	6.42" x 3.87" x 1.38" (163.0 mm x 98.4 mm x 35.0 mm)		5.35" x 3.78" x 1.16" (136.0 mm x 96.0 mm x 29.5 mm)	9.97" x 4.35" x 11.56" (253.2 mm x 110.6 mm x 293.6 mm)
Channels	1				2
External Temperature Sensor Input (Sensor Not Included)	-	-	Readout and Record Temperature Over Time		
External Humidity Sensor Input (Sensor Not Included)	-	-	Readout and Record Humidity Over Time		
Analog Output[b]	Amplified Input Signal, SMA, 0 to 2 V, Up to 100 kHz	Amplified Input Signal or 12-bit DAC Corrected Input Signal, SMA, 0 to 2.5 V, Up to 100 kHz	Amplified Input Signal, 12-bit DAC Corrected Input Signal, or 14-bit DAC Corrected X-Y Position Signal, SMA, 0 to 2.5 V (Power); -2.0 to 2.0 V (Position), Up to 100 kHz	Amplified Input Signal or DAC Corrected Input Signal, 2p Audio 3.5 mm (Adapter to BNC included), 0 to 2 V, Up to 100 kHz	Amplified Input Signal or DAC Corrected Input Signal, 2 x BNC, -2.5 to 10 V, Up to 250 kHz. Programmable AO[c], 4 x BNC, -5 to 10 V, Up to 1 kHz

Item #	PM100A	PM100D2	PM100D3	PM400	PM5020
Input/Output Ports	-		26-Pin AUX Connector With 4 GPIO, AN OUT for Power (Analog Input Signal and 12-bit DAC) and Position Sensor (14-bit DAC), I2C, UART, and Analog and Digital Supply Voltages	14-Pin AUX Connector With 4 GPIO, Programmable, 2 x 10 bit ADC for External Temperature, Relative Humidity Sensor, +3.3 V, ±2.5 V (100 mA Max)	10-Pin PCB Connector, 4 Configurable Digital I/O Channels, 1 Trigger In/Out, I2C (LVTTL / TTL)
Shutter Control	-	-	-	-	Support for SH05R(/M) or SH1(/M) Optical Shutter with Interlock Input
Fan Control	-	-	-	-	✓
Source Spectral Correction	-	✓	✓	✓	✓
Attenuation Correction	-	✓	✓	✓	✓
External Trigger Input	-	-	✓	-	✓
Display					
Type	Mechanical Needle and LCD Display with Digital Readout	3.5" Full Color Touchscreen Display, 640 x 480 Pixels		4.3" Protected Capacitive Touchscreen with Color Display, 400 x 272 Pixels	5" IPS Touchscreen LCD Display, 854 x 480 Pixels
Dimensions	Digital: 1.9" x 0.5" (48.2 mm x 13.2 mm) Analog: 3.54" x 1.65" (90.0 mm x 42.0 mm)	2.80" x 2.10" (71.0 mm x 53.3 mm)		3.7" x 2.1" (95 mm x 54 mm)	4.32" x 2.43" (109.7 mm x 61.6 mm)
Refresh Rate	20 Hz	50 Hz		10 Hz (Numerical) 25 Hz (Analog Simulation)	25 Hz
Measurement Views[d]					
Numerical	✓	✓	✓	✓	✓
Mechanical Analog Needle	✓	-	-	-	-
Simulated Analog Needle	-	✓	✓	✓	✓
Bar Graph	-	✓	✓	✓	✓
Trend Graph	-	✓	✓	✓	✓
Statistics	✓	✓	✓	✓	✓
Pass/Fail	-	-	✓	-	-
Scope	-	-	✓	-	✓
Memory					
Type	-	eMMC Flash		NAND Flash	SD Card
Size	-	8 GB		4 GB	8 GB
Power					
Battery	LiPo 3.7 V 2300 mAh	LiPo 3.7 V 2300 mAh		LiPo 3.7 V 2300 mAh	-
External	5 VDC via USB or Included AC Adapter	5 VDC via USB-C Connector		5 VDC via USB Mini B Connector	Line Voltage: 100 - 240 V

a. As the PM400 console can only support repetition rates of up to 3 kHz, it should not be used with the ES408C sensor, which detects repetition rates up to 10 kHz.
b. The analog output bandwidth is dependent on the sensor and settings.
c. Selectable from the following options: CH1, CH2, CH1 - CH2, CH1/CH2, Position X, Position Y. Programmable gain and offset.
d. These are the measurement views built into the unit.

Interfaces

Item #	PM101	PM102	PM103	PM101A	PM102A	PM103A
(Click Photo to Enlarge)						

Item #	PM101	PM102	PM103	PM101A	PM102A	PM103A
Operation Protocol	USB, RS232, UART, and Analog			USB and Analog SMA		
Sensor Compatibility						
Photodiode	✓	-	✓	✓	-	✓
Thermal Power	✓	✓	-	✓	✓	-
Thermal Position & Power	-	✓	-	-	✓	-
Pyroelectric	-	-	✓	-	-	✓

Expand for More Details

Key Features						
C-Series Sensor DE-9 Connector	✓			✓		
USB Connector	Lockable			Lockable		
USB Max Measurement Speed	1000 S/s	1000 S/s	100 000 S/s	1000 S/s	1000 S/s	100 000 S/s
Serial DE-9 Connector	-			-		
DE-9 Max Measurement Speed	-			-		
SMA Connector(s)	-			1 Analog Power Output	3 Ports: Power, X-Position, and Y-Position	3 Ports: AO1, AO2, and Digital I/O (Configurable as External Trigger Input)
DA-15 Universal Connector with 2 Auxiliary I/O Ports	✓	✓	GPIO Ports Also Configurable as Trigger Input (Pin 2) or for Pass/Fail Analysis (Pin 3)	-		
DA-15 Max Measurement Speed	200 S/s	200 S/s	100 000 S/s	-		
Ethernet (RJ45) Connector	-	-	-	-		
Ethernet Max Measurement Speed	-	-	-	-		
Phoenix DMC 0,5/7 Connector	-	-	-	-		
DMC 0,5/7 Max Measurement Speed	-	-	-	-		
External Temperature Sensor Input (Sensor Not Included)	NTC Thermistor			-		
Display						
Type	No Built-In Display; Controlled via GUI for PC					
Measurement Views[c]						
Numerical	Requires PC					
Simulated Analog Needle	Requires PC					
Bar Graph	Requires PC					
Trend Graph	Requires PC					
Histogram	Requires PC					
Statistics	Requires PC					
Memory						
Type	Internal Non-Volatile Memoryfor All Settings					

Power		
External	5 VDC via USB or 5 to 36 VDC via DA-15 Pins 1 and 9	5 VDC via USB

Item #	PM103E	PM101R	PM101U	PM102U	PM103U	PM100USB
(Click Photo to Enlarge)						
Operation Protocol	Ethernet, RS232, and Analog	USB and RS232	USB Operation			USB
Sensor Compatibility						
Photodiode	✓	✓	✓	-	✓	✓
Thermal Power		✓	✓	✓	-	✓
Thermal Position & Power		-	-	✓	-	-
Pyroelectric	✓	-	-	-	✓	✓[a]
Expand for More Details						
Key Features						
C-Series Sensor DE-9 Connector	✓	✓	✓			✓
USB Connector	-	Lockable	Lockable			Not Lockable
USB Max Measurement Speed	-	1000 S/s	1000 S/s	1000 S/s	100 000 S/s	300 S/s
Serial DE-9 Connector	-	✓	-			-
DE-9 Max Measurement Speed	-	200 S/s	-			-
SMA Connector(s)	-	-	-			-
DA-15 Universal Connector with 2 Auxiliary I/O Ports	-	-	-			-
DA-15 Max Measurement Speed	-	-	-			-
Ethernet (RJ45) Connector	✓	-	-			-
Ethernet Max Measurement Speed	100 000 S/s	-	-			-
Phoenix DMC 0,5/7 Connector	✓	-	-			-
DMC 0,5/7 Max Measurement Speed	100 000 S/s	-	-			-
External Temperature Sensor Input (Sensor Not Included)	NTC Thermistor	-	-			-
Display						
Type	No Built-In Display; Controlled via GUI for PC					
Measurement Views[c]						
Numerical	Requires PC					
Simulated Analog Needle	Requires PC					
Bar Graph	Requires PC					
Trend Graph	Requires PC					

Histogram	Requires PC			
Statistics	Requires PC			
Memory				
Type	Internal Non-Volatile Memory for All Settings			-
Power				
External	Power over Ethernet[d] and 5 to 36 VDC via DMC 0,5/7 pin 1 and 2	5 VDC via USB	5 VDC via USB	5 VDC via USB

a. As the PM100USB interface can only support repetition rates of up to 3 kHz, it should not be used with the ES408C sensor, which detects repetition rates up to 10 kHz.
b. Dependent on PC Settings
c. These power meter interfaces do not have a built-in monitor, so all data must be displayed through a PC running the Optical Power Monitor Software.
d. 48 V is the nominal voltage over the network, but can range from 36 V - 57 V.

Sensor Selection

This tab outlines the full selection of Thorlabs' power and energy sensors. Refer to Table 113B for power meter console and interface compatibility information.

In addition to the power and energy sensors listed below, Thorlabs also offers all-in-one, wireless, handheld power meters and compact USB power meter interfaces that contain either a photodiode or a thermal sensor, as well as power meter bundles that include a console, sensor head, and post mounting accessories.

Thorlabs offers four types of sensors:

- **Photodiode Sensors:** These sensors are designed for power measurements of monochromatic or near-monochromatic sources, as they have a wavelength dependent responsivity. These sensors deliver a current that depends on the input optical power and the wavelength. The current is fed into a transimpedance amplifier, which outputs a voltage proportional to the input current.
- **Thermal Sensors:** Constructed from material with a relatively flat response function across a wide range of wavelengths, these thermopile sensors are suitable for power measurements of broadband sources such as LEDs and SLDs. Thermal sensors deliver a voltage proportional to the input optical power.
- **Thermal Position & Power Sensors:** These sensors incorporate four thermopiles arranged as quadrants of a square. By comparing the voltage output from each quadrant, the unit calculates the beam's position.
- **Pyroelectric Energy Sensors:** Our pyroelectric sensors produce an output voltage through the pyroelectric effect and are suitable for measuring pulsed sources, with a repetition rate limited by the time constant of the detector. These sensors will output a peak voltage proportional to the incident pulse energy.



Figure 113A The PM160 wireless power meter, shown here with an iPad mini (not included), can be remotely operated using Apple mobile devices.

Power and Energy Sensor Selection Guide

There are two options for comparing the specifications of our Power and Energy Sensors. Tables 113C, 113D, 113E, and 113F sort our sensors by type (e.g., photodiode, thermal, or pyroelectric) and provide key specifications.

Alternatively, the selection guide Figures 113G and 113H arrange our entire selection of photodiode and thermal power sensors by wavelength (Figure 113G) or optical power range (Figure 113H). Each box contains the item # and specified range of the sensor. These graphs allow for easy identification of the sensor heads available for a specific wavelength or power range.

Table 113B Console Compatibility

Console Item #	PM100A	PM100D2	PM100D3	PM400	PM5020	PM101 Series	PM102 Series	PM103 Series	PM100USB
Photodiode Power	✓	✓	✓	✓	✓	✓	-	✓	✓
Thermal Power	✓	✓	✓	✓	✓	✓	✓	-	✓
Thermal Position	-	-	✓	✓	✓	-	✓	-	-
Pyroelectric Energy	-	✓	✓	✓[a]	✓	-	-	✓	✓[a]

a. As the PM400 console and the PM100USB interface can only support repetition rates of up to 3 kHz, they should not be used with the ES408C sensor, which detects repetition rates up to 10 kHz.

Table 113C Photodiode Power Sensors

Sensor Type	Applications	Item #	Wavelength	Energy or Power Range	Detector Type	Aperture	Response Time
 Standard Sensors	General Purpose Power Measurements	S120VC	200 - 1100 nm	50 nW - 50 mW (200 - 450 nm) 50 nW - 20 mW (450 - 1100 nm)	Si	Ø9.5 mm	<1 µs[a]
		S120C	400 - 1100 nm	50 nW - 50 mW		Ø9.5 mm	
		S121C	400 - 1100 nm	500 nW - 500 mW		Ø9.5 mm	
		S122C	700 - 1800 nm	50 nW - 40 mW	Ge	Ø9.5 mm	
 Slim Sensors	Power Measurements in Tight Spaces such as 30 mm Cage Systems	S130VC	200 - 450 nm	500 pW - 0.5 mW (Up to 50 mW with Filter)	Si Slim	Ø9.5 mm	
			450 - 1100 nm	500 pW - 0.2 mW (Up to 20 mW with Filter)			
		S130C	400 - 1100 nm	500 pW - 5 mW (Up to 500 mW with Filter)		Ø9.5 mm	
		S132C	700 - 1800 nm	5 nW - 5 mW (Up to 500 mW with Filter)	Ge Slim	Ø9.5 mm	

 Compact Slim Sensor	Power Measurements in Tight Spaces such as 16 mm Cage Systems	S116C	400 - 1100 nm	20 nW - 50 mW	Si Compact Slim	Ø6 mm
 Microscope Slide Sensor	Measure Power at the Sample Plane of a Microscope	S170C	350 - 1100 nm	10 nW - 150 mW	Si Large Area	18 mm x 18 mm
	Measure Relative Peak Power at the Sample Plane of a Microscope	NS170C	780 - 1300 nm	0.5 W - 350 mW[b]	Si Large Area with Second-Order Nonlinear Crystal	Ø4.5 mm
 Integrating Sphere Sensors	Power Measurements for High Powers and Divergent Beams	S140C	350 - 1100 nm	1 µW - 500 mW	Si Integrating	Ø5 mm
		S142C	350 - 1100 nm	5 µW - 5 W		Ø12 mm
		S142CL	400 - 1100 nm	10 µW - 5 W	Si Integrating w/Baffle	Ø22 mm
		S144C	800 - 1700 nm	100 nW - 500 mW	InGaAs Integrating	Ø5 mm
		S145C	800 - 1700 nm	1 µW - 3 W		Ø22 mm
		S145CL	800 - 1700 nm	10 µW - 3 W	InGaAs Integrating w/Baffle	Ø22 mm
		S146C	900 - 1650 nm	10 µW - 20 W	InGaAs Integrating	Ø12 mm
		S148C	1200 - 2500 nm	1 µW - 1 W		Ø5 mm
		S180C	2900 - 5500 nm	1 µW - 3 W	MCT (HgCdTe)	Ø7 mm
 Fiber Sensors	Fiber Power Measurements and Field Applications	S150C	350 - 1100 nm	100 pW - 5 mW	Si Fiber	Ø5 mm
		S151C	400 - 1100 nm	1 nW - 20 mW		Ø5 mm
		S154C	800 - 1700 nm	100 pW - 3 mW	InGaAs Fiber	Ø5 mm
		S155C	800 - 1700 nm	1 nW - 20 mW		Ø5 mm

Table 113D Thermal Power Sensors

Sensor Type	Applications	Item #	Wavelength	Energy or Power Range	Detector Type	Aperture	Response Time[c]
 High Resolution	Broadband Measurements of Optical Powers ≤5 W with 1 µW or 5 µW Resolution	S401C	190 nm - 20 µm	10 µW - 1 W (3 W[d])	Thermal Surface Absorber with Background Compensation	Ø10 mm	1.1 s
		S405C	190 nm - 20 µm	100 µW - 5 W	Thermal Surface Absorber	Ø10 mm	1.1 s
 Max Power: 10 W	General Broadband Power Measurements of Low and Medium Power Light Sources	S415C	190 nm - 20 µm	2 mW - 10 W (20 W[d])		Ø15 mm	0.6 s
		S425C	190 nm - 20 µm	2 mW - 10 W (20 W[d])		Ø25.4 mm	0.6 s
 Max Power: 40 W to 200 W		S350C	190 nm - 1.1 µm, 10.6 µm	10 mW - 40 W (60 W[d])		Ø40 mm	9 s (1 s from 0 to 90%)
		S425C-L	190 nm - 20 µm	2 mW - 50 W (75 W[d])		Ø25.4 mm	0.6 s
		S322C	250 nm - 11 µm	100 mW - 200 W (250 W[d])		Ø25 mm	5 s (1 s from 0 to 90%)
 High Max Power Density	Optical Power Measurements of Nd:YAG and Other Pulsed Laser Sources	S370C	400 nm - 5200 nm	10 mW - 10 W (15 W[d])	Thermal Volume Absorber	Ø25 mm	45 s (3 s from 0 to 90%)
		S470C	250 nm - 10.6 µm	100 µW - 5 W		Ø15 mm	6.5 s (<2 s from 0 to 90%)

 Microscope Slide	Measure Power at the Sample Plane of a Microscope	S175C	300 nm - 10.6 µm	100 µW - 2 W	Thermal Surface Absorber	18 mm x 18 mm	3 s (<2 s from 0 to 90%)

Table 113E Thermal Position & Power Sensors

Sensor Type	Applications	Item #	Wavelength	Power Range	Detector Type	Aperture	Response Time[c]
 High Resolution	Precise Beam Position and Power Measurements of Low and Medium Power Lasers	S440C	190 nm - 20 µm	0.5 mW - 5 W	Thermal Absorber, Four Quadrants	17 x 17 mm	<1.1 s
 High Power		S442C	190 nm - 20 µm	10 mW - 50 W	Thermal Absorber, Four Quadrants	Ø17.5 mm	<0.6 s

Table 113F Pyroelectric Energy Sensors

Sensor Type	Applications	Item #	Wavelength	Energy or Power Range	Max Repetition Rate (@ 1 MΩ Load)	Detector Type	Aperture	Response Time
 Standard Energy Sensors	General Purpose Energy Meter	ES111C	185 nm - 25 µm	10 µJ - 150 mJ	40 Hz	Pyroelectric Black Broadband Coating	Ø11 mm	N/A[e]
		ES120C	185 nm - 25 µm	100 µJ - 500 mJ	30 Hz		Ø20 mm	
		ES145C	185 nm - 25 µm	500 µJ - 2 J	30 Hz		Ø45 mm	
 High-Energy Sensors	High Energy Measurements for High Peak Energy Lasers: Excimer, CO_2-TEA, and Nd:YAG	ES220C	185 nm - 25 µm	500 µJ - 3 J	30 Hz	Pyroelectric Ceramic Coating	Ø20 mm	
		ES245C	185 nm - 25 µm	1 mJ - 15 J	30 Hz		Ø45 mm	
 Fast Energy Sensors	High Repetition Rate Measurements	ES308C	185 nm - 25 µm	500 µJ - 1 J	1 kHz	Pyroelectric Black Broadband Coating	Ø8 mm	
		ES312C	185 nm - 25 µm	100 µJ - 1 J	250 Hz		Ø12 mm	
		ES408C	185 nm - 2.5 µm	100 µJ - 1 J	10 kHz	Pyroelectric Metal Coating	Ø8 mm	
		ES412C	185 nm - 2.5 µm	50 µJ - 500 mJ	2 kHz		Ø12 mm	

a. The response time of the photodiode sensor. The actual response time of a power meter using these sensors will be limited by the update rate of your power meter console.
b. The power range provided is for lasers with a repetition rate of 80 MHz. Because the peak power and peak power density are dependent on the average power and repetition rate of the laser, the upper limit to the working average power range will be lower for lower repetition rates. Please see the *Specs* tab here for more details.
c. Typical natural response time (0 - 95%). Our power consoles can provide estimated measurements of optical power on an accelerated time scale (typically <1 s) when the natual response time is approximately 1 s or greater. As the natural response times of the S415C, S425C, and S425C-L are fast, these do not benefit from accelerated measurements and this function cannot be enabled. For more information, see the *Operation* tab here.
d. With intermittent use: maximum exposure time of 20 minutes for the S401C, otherwise maximum exposure time is 2 minutes.
e. All pyroelectric sensors have a thermal time constant, τ. This value indicates how long it takes the sensor to recover from a single pulse. To detect the correct energy levels, pulses must be shorter than 0.1τ and the repetition rate of your source must be well below 1/τ. Please see the Specs tab here for the τ value of each sensor.

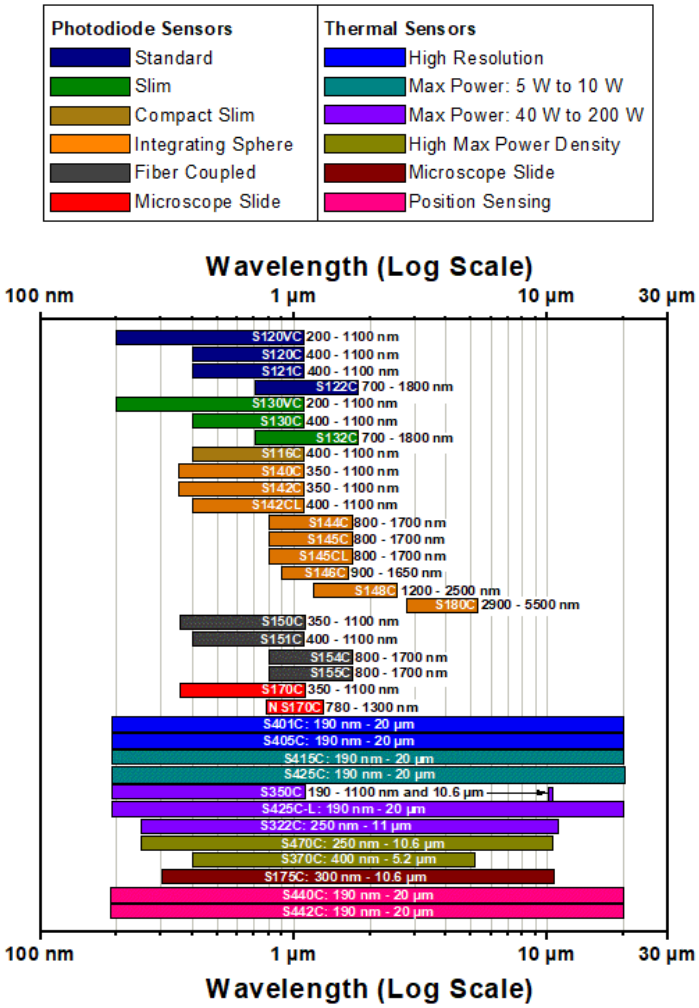


Figure 113G Sensor Options Arranged by Wavelength Range

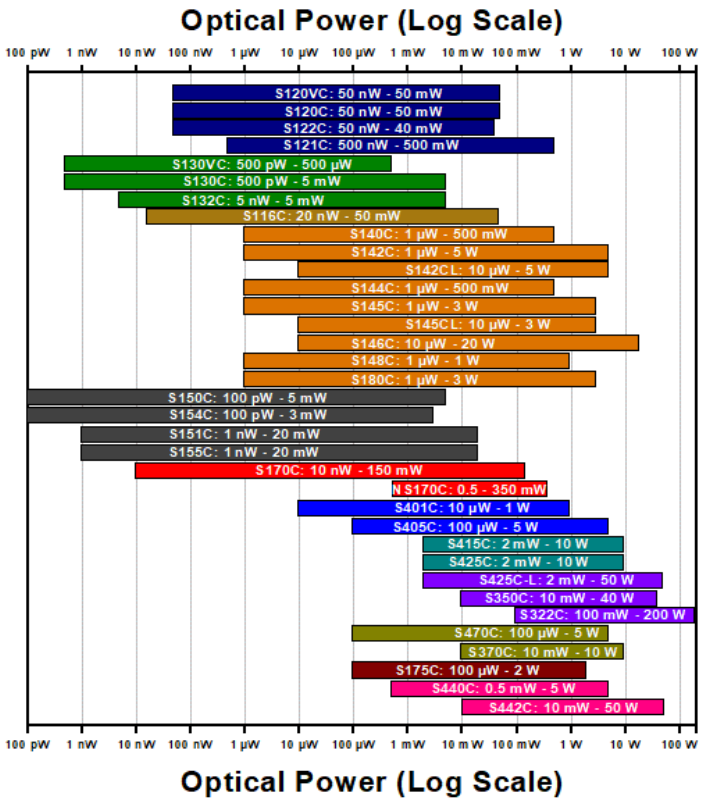


Figure 113H Sensor Options Arranged by Power Range

Recalibration

Recalibration Services


Thorlabs offers two types of recalibration services in-house for our power and energy meter electronics and photodiode power sensors: ISO 17025 accredited calibrations and manufacturer calibrations. Only the manufacturer calibration is available for the NS170C microscope slide peak power sensor, our thermal power sensors, and our pyroelectric energy sensors. All new products are delivered with a manufacturer calibration by default; if an ISO 17025 accredited calibration is desired for a new device, please contact Tech Sales.

ISO 17025 accredited calibrations are performed in-house in accordance with DIN EN ISO/IEC 17025:2018. Thorlabs GmbH's calibration laboratory is accredited by the German Accreditation Body (DAkkS), the national accreditation authority of the Federal Republic of Germany. The scope of services is described here in English or German. Accredited calibrated power and/or energy meter electronics come with a dedicated certificate of calibration proving the specified accuracy and traceability of calibration data. This certification may be required in certain applications or industries, such as the medical market.

In contrast, our manufacturer calibrations are subject to the quality management requirements of ISO 9001. The certificate of calibration lists the equipment used for the calibration procedure as well as the calibration data acquired. The manufacturer calibration of a power sensor includes recalibration of a single-channel console or interface at no additional cost. If you wish to calibrate one or more sensors with a dual-channel console, each sensor and console calibration service will need to be purchased individually.

Both types of calibration can be offered for third-party equipment or adjusted for special requirements upon request. Please reach out to Tech Sales for further details.

We recommend recalibrating your Thorlabs sensor and console as a pair; however, each may be recalibrated individually. To ensure accurate measurements, we recommend recalibrating annually. For more information about how to order sensor or console recalibrations, please see the recalibration subgroups below.

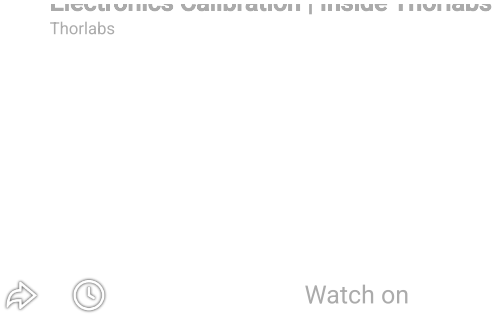

Video 796A This video describes our in-house electronics recalibration services, capabilities, and teams involved in the recalibration process.



Figure 796B DAkkS-accredited calibrations are performed in accordance with DIN EN ISO/IEC 17025:2018.

Digital Console with Photodiode Sensor (50 nW - 50 mW, 400 nm - 1100 nm)

Kit Item #	PM400K1
Click Image to Enlarge	
Included Console Item #	PM400
Display	4.3" Capacitive Color Touchscreen, WQVGA Resolution
Connectivity	USB 2.0 Connectivity
Console Sensor Compatibility	All C-Series Photodiode and Thermal Power Sensors as Well as All Pyroelectric Energy Sensors
Post Assembly Threading	Imperial
Mounting Base Compatibility	Imperial

Included Sensor	S120C
Wavelength Range	400 - 1100 nm
Power Range	50 nW - 50 mW
Resolution	1 nW
Detector Type	Si Photodiode
Aperture	Ø9.5 mm
Spec Sheet	

The PM400K1 kit includes our PM400 power meter console, a S120C photodiode sensor, and a post assembly, consisting of a BA2 base, PH2 post holder, and TR2 Ø1/2" post. This is a general purpose kit for low power lasers (50 nW - 50 mW) within the visible and NIR. Surrounding the sensor's active area is a fluorescing alignment disk, which absorbs light from 400 - 640 nm and 800 - 1700 nm. Many of our laser diodes and HeNe lasers are suitable for use with this power meter kit.

Thorlabs offers an in-house NIST traceable recalibration service for these power and energy meter kits, which can be ordered using Item # CAL-PD below. Enter only the Part # and Serial # of the sensor that requires recalibration and include the corresponding console for recalibration during shipment.

We recommend recalibrating your sensor and console as a pair; however, if you would like to recalibrate only your console, use Item #s CAL-PM1 or CAL-PM1D below.

We also offer an ISO 17025 accredited calibration for the sensor and console separately. For more information or to order the accredited calibration, use Item #s CAL-PDD or CAL-PM1D below.

Imperial (1 Item)

Items Ship from Newton, NJ

Item		Docs	Available	Price	Qty
PM400K1	Touchscreen Digital Power & Energy Console, Si Sensor, 400 - 1100 nm, 50 nW - 50 mW		Today	$2,075.35	1

Digital Console with Photodiode Sensor (500 nW - 500 mW, 400 nm - 1100 nm)

Kit Item #	PM400K2
Click Image to Enlarge	
Included Console Item #	PM400
Display	4.3" Capacitive Color Touchscreen, WQVGA Resolution
Connectivity	USB 2.0 Connectivity
Console Sensor Compatibility	All C-Series Photodiode and Thermal Power Sensors as Well as All Pyroelectric Energy Sensors
Post Assembly Threading	Imperial
Mounting Base Compatibility	Imperial

Included Sensor	S121C
Wavelength Range	400 - 1100 nm
Power Range	500 nW - 500 mW
Resolution	10 nW
Detector Type	Si Photodiode
Aperture	Ø9.5 mm
Spec Sheet	

The PM400K2 kit includes our PM400 console, a S121C photodiode sensor, and a post assembly, consisting of a BA2 base, PH2 post holder, and TR2 Ø1/2" post. This is a general purpose kit for low to medium power lasers (500 nW - 500 mW) within the visible and NIR spectrums (<1100 nm). It is similar to the S120C, which is included in the kit above, but an ND filter attenuates the light before the sensor. Surrounding the sensor's active area is a fluorescing alignment disk, which absorbs light from 400 - 640 nm and 800 - 1700 nm.

Thorlabs offers an in-house NIST traceable recalibration service for these power and energy meter kits, which can be ordered using Item # CAL-PD below. Enter only the Part # and Serial # of the sensor that requires recalibration and include the corresponding console for recalibration during shipment.

We recommend recalibrating your sensor and console as a pair; however, if you would like to recalibrate only your console, use Item #s CAL-PM1 or CAL-PM1D below.

We also offer an ISO 17025 accredited calibration for the sensor and console separately. For more information or to order the accredited calibration, use Item #s CAL-PDD or CAL-PM1D below.

Imperial (1 Item)

Items Ship from Newton, NJ

Item		Docs	Available	Price	Qty
PM400K2	Touchscreen Digital Power & Energy Console, Si Sensor, 400 nm - 1100 nm, 500 nW - 500 mW		Today	$2,108.02	1

Digital Console with Photodiode Sensor (500 pW - 500 mW, 400 nm - 1100 nm)

Kit Item #	PM400K3
Click Image to Enlarge	
Included Console Item #	PM400
Display	4.3" Capacitive Color Touchscreen, WQVGA Resolution
Connectivity	USB 2.0 Connectivity
Console Sensor Compatibility	All C-Series Photodiode and Thermal Power Sensors as Well as All Pyroelectric Energy Sensors
Post Assembly Threading	Imperial
Mounting Base Compatibility	Imperial

Included Sensor	S130C
Wavelength Range	400 - 1100 nm
Power Range	500 pW - 5 mW (Up to 500 mW with Filter)[a]
Resolution	100 pW
Detector Type	Si Photodiode
Aperture	Ø9.5 mm
Spec Sheet	

a. The S130C sensor features a sliding neutral density filter.

The PM400K3 kit includes our PM400 console, an S130C photodiode power sensor, and a post assembly, consisting of a BA2 base, PH2 post holder, and TR2 Ø1/2" post. The kit's slim sensor head is ideal for use in tight spaces as it is only 0.2" (5 mm) thick at its sensor. A sliding neutral density filter extends the power range that the sensor can be used to measure. With the filter out of the beam path, the power detection range is 500 pW to 5 mW. With the filter in the beam path, power detection from 50 nW to 500 mW is possible; however, power levels below 5 mW should be detected without the filter in the beam path for optimal results. The filter's position is automatically detected and accounted for by the power meter console.

Thorlabs offers an in-house NIST traceable recalibration service for these power and energy meter kits, which can be ordered using Item # CAL-PD2 below. Enter only the Part # and Serial # of the sensor that requires recalibration and include the corresponding console for recalibration during shipment.

We recommend recalibrating your sensor and console as a pair; however, if you would like to recalibrate only your console, use Item #s CAL-PM1 or CAL-PM1D below.

We also offer an ISO 17025 accredited calibration for the sensor and console separately. For more information or to order the accredited calibration, use Item #s CAL-PD2D or CAL-PM1D below.

Imperial (1 Item)

Items Ship from Newton, NJ

Item		Docs	Available	Price	Qty
PM400K3	Touchscreen Digital Power & Energy Console, Slim Si Sensor, 400 nm - 1100 nm, 500 pW - 500 mW			$2,328.33	1

Digital Console with Photodiode Sensor (50 nW - 40 mW, 700 nm - 1800 nm)

Kit Item #	PM400K4
Click Image to Enlarge	
Included Console Item #	PM400
Display	4.3" Capacitive Color Touchscreen, WQVGA Resolution
Connectivity	USB 2.0 Connectivity
Console Sensor Compatibility	All C-Series Photodiode and Thermal Power Sensors as Well as All Pyroelectric Energy Sensors
Post Assembly Threading	Imperial
Mounting Base Compatibility	Imperial

Included Sensor	S122C
Wavelength Range	700 - 1800 nm
Power Range	50 nW - 40 mW
Resolution	2 nW
Detector Type	Ge Photodiode
Aperture	Ø9.5 mm
Spec Sheet	

The PM400K4 kit includes our PM400 console, a S122C photodiode sensor, and a post assembly, consisting of a BA2 base, PH2 post holder, and TR2 Ø1/2" post. This combination is ideal for customers working with wavelengths in the far red to NIR (700 - 1800 nm). Surrounding the sensor's active area is a fluorescing alignment disk, which absorbs light from 400 - 640 nm and 800 - 1700 nm.

Thorlabs offers an in-house NIST traceable recalibration service for these power and energy meter kits, which can be ordered using Item # CAL-IRPD below. Enter only the Part # and Serial # of the sensor that requires recalibration and include the corresponding console for recalibration during shipment.

We recommend recalibrating your sensor and console as a pair; however, if you would like to recalibrate only your console, use Item #s CAL-PM1 or CAL-PM1D below.

We also offer an ISO 17025 accredited calibration for the sensor and console separately. For more information or to order the accredited calibration, use Item #s CAL-IRPDD or CAL-PM1D below.

Imperial (1 Item)

Items Ship from Newton, NJ

Item		Docs	Available	Price	Qty
PM400K4	Touchscreen Digital Power & Energy Console, Ge Sensor, 700 nm - 1800 nm, 50 nW - 40 mW			$2,455.48	1

Digital Console with Thermal Sensor (2 mW - 10 W, 0.19 µm - 20 µm)

Kit Item #	PM400K5
Click Image to Enlarge	
Included Console Item #	PM400
Display	4.3" Capacitive Color Touchscreen, WQVGA Resolution
Connectivity	USB 2.0 Connectivity
Console Sensor Compatibility	All C-Series Photodiode and Thermal Power Sensors as Well as All Pyroelectric Energy Sensors
Post Assembly Threading	Imperial
Mounting Base Compatibility	Imperial

Included Sensor	S425C
Wavelength Range	0.19 - 20 µm
Power Range	2 mW - 10 W
Resolution	100 µW
Detector Type	Thermal
Aperture	Ø25.4 mm
Spec Sheet	

The PM400K5 kit includes our PM400 power meter console, an S425C photodiode sensor, and a post assembly, consisting of a BA2 base, PH2 post holder, and TR2 Ø1/2" post. This is a general-purpose kit for customers working with higher powered lasers (up to 10 W) or longer wavelengths (up to 20 µm). The S425C thermal sensor has an exceptionally fast response time of 0.6 s.

Thorlabs offers an in-house NIST traceable recalibration service for these power and energy meter kits, which can be ordered using Item # CAL-THPY below. Enter only the Part # and Serial # of the sensor that requires recalibration and include the corresponding console for recalibration during shipment.

We recommend recalibrating your sensor and console as a pair; however, if you would like to recalibrate only your console, use Item #s CAL-PM1 or CAL-PM1D below.

We also offer an ISO 17025 accredited calibration for the PM400 console separately. For more information or to order the accredited calibration, use Item # CAL-PM1D below.

Imperial (1 Item) — Items Ship from Newton, NJ

Item		Docs	Available	Price	Qty
PM400K5	Touchscreen Digital Power & Energy Console, Thermal Sensor, 0.19 µm - 20 µm, 2 mW - 10 W			$2,681.00	1

Manufacturer Recalibration Service for Photodiode Power Sensors

Thorlabs offers traceable recalibration services for our photodiode optical power sensors. To ensure accurate measurements, we recommend recalibrating the sensors annually. The manufacturer calibration of a power sensor includes recalibration of a single-channel console or interface at no additional cost; this is unavailable for the accredited calibration option. If you wish to calibrate one or more sensors with a dual-channel console, each sensor and console calibration service will need to be purchased individually. For more details on these recalibration services, please click the Documents ( ) icons below.

Refer to Table 236A for the appropriate calibration service Item # that corresponds to your power sensor.

Table 236A Compatibility

Calibration Service Item #	Compatible Sensors
CAL-UVPD	S120VC
CAL-PD	S116C, S120C, S121C, S170C, S140C, S142C, S142CL, S150C, S151C, PM16-120, PM16-121, PM16-140
CAL-UVPD2	S130VC
CAL-PD2	S130C, PM16-130, PM160
CAL-NS	NS170C
CAL-IRPD	S122C, S144C, S145C, S145CL, S146C, S154C, S155C, PM16-122, PM16-144
CAL-IRPD2	S132C
CAL-MIRPD	S148C, S180C

Requesting a Calibration
Thorlabs provides two options for requesting a calibration:

1. Complete the Returns Material Authorization (RMA) form. When completing the RMA form, please enter your name and contact information; enter your Item Number, Quantity, and the Serial Number of each item being returned for calibration after answering "No" to "Return Entire Order?" In the *Reason for Return* field, select "I would like to calibrate an item." In the *Additional Details* field, please indicate "Manufacturer Calibration" or the desired calibration part number below in order to differentiate from the ISO 17025 accredited calibration option. Once the form has been submitted, a member of our RMA team will reach out to provide an RMA Number, return instructions, and to verify billing and payment information.

   Submit Calibration Request

2. Within the selected calibration item in the Price Box below, enter the Item # and Serial # of the sensor that requires recalibration, and then Add to Cart. If you would like a console calibrated with your sensor, repeat this process for Item # CAL-PM1 or CAL-PM2 below, entering the console Item # and Serial #. A member of our RMA team will reach out to coordinate the return of the item(s) for calibration. Note that each console calibration Item # represents the cost of calibrating a console alone; if requesting a single-channel console calibration with a sensor calibration, the appropriate discount will be applied when your request is processed. Should you have other items in your cart, note that the calibration request will be split off from your order for RMA processing.

Please Note: To ensure your item being returned for calibration is routed appropriately once it arrives at our facility, please do not ship it prior to being provided an RMA Number and return instructions by a member of our team.

Universal (8 Items) — Items Ship from Newton, NJ

Item		Docs	Available	Price	Qty
CAL-UVPD	Manufacturer Recalibration Service for S120VC UV-Extended Silicon Photodiode Power Sensor Item #: Item Number Serial #: Serial Number			$206.73	*Qty: 1*
CAL-PD	Manufacturer Recalibration Service for Single-Power-Range Silicon Photodiode Power Sensors Item #: Item Number Serial #: Serial Number			$179.20	*Qty: 1*
CAL-UVPD2	Manufacturer Recalibration Service for S130VC Extended-UV Silicon Photodiode Power Sensor Item #: Item Number Serial #: Serial Number			$245.50	*Qty: 1*
CAL-PD2	Manufacturer Recalibration Service for Dual-Power-Range Silicon Photodiode Power Sensors Item #: Item Number Serial #: Serial Number			$208.47	*Qty: 1*
CAL-NS	Manufacturer Recalibration Service for Second-Order Nonlinear Crystal with Silicon Photodiode Sensor Item #: Item Number Serial #: Serial Number			$358.45	*Qty: 1*
CAL-IRPD	Manufacturer Recalibration Service for Single-Power-Range Germanium or InGaAs Photodiode Power Sensors Item #: Item Number Serial #: Serial Number			$202.10	*Qty: 1*

Item		Docs	Available	Price	Qty
CAL-IRPD2	Manufacturer Recalibration Service for Dual-Power-Range Germanium or InGaAs Photodiode Power Sensors Item #: Item Number Serial #: Serial Number			$221.16	*Qty: 1*
CAL-MIRPD	Manufacturer Recalibration Service for Extended InGaAs or MCT Photodiode Power Sensors Item #: Item Number Serial #: Serial Number			$360.99	*Qty: 1*

In-House ISO 17025 Accredited Recalibration Service for Photodiode Power Sensors

Thorlabs offers ISO 17025 accredited recalibration services for our photodiode optical power sensors. If you wish to calibrate one or more sensors with a console, each sensor and console calibration service will need to be purchased individually. ISO 17025 accredited calibrations are performed in accordance with DIN EN ISO/IEC 17025:2018. Thorlabs GmbH's calibration laboratory is accredited by the German Accreditation Body (DAkkS), the national accreditation authority of the Federal Republic of Germany. The scope of services is described here in English or German. For more details on these recalibration services, please see the *Recalibration* tab or click the Documents ( ) icons below.

Refer to Table 791A for the appropriate calibration service Item # that corresponds to your power sensor.

Table 791A Compatibility	
Calibration Service Item #	**Compatible Sensors**
CAL-UVPDD	S120VC
CAL-PDD	S116C, S120C, S121C, S170C, S140C, S142C, S142CL, S150C, S151C, PM16-120, PM16-121, PM16-140
CAL-UVPD2D	S130VC
CAL-PD2D	S130C, PM16-130, PM160
CAL-IRPDD	S122C, S144C, S145C, S145CL, S146C, S154C, S155C, PM16-122, PM16-144
CAL-IRPD2D	S132C
CAL-MIRPDD	S148C

Requesting a Calibration
Thorlabs provides two options for requesting a calibration:

1. Complete the Returns Material Authorization (RMA) form. When completing the RMA form, please enter your name and contact information; enter your Item Number, Quantity, and the Serial Number of each item being returned for calibration after answering "No" to "Return Entire Order?" In the *Reason for Return* field, select "I would like to calibrate an item." In the *Additional Details* field, please indicate "ISO 17025 Accredited Calibration" or the desired calibration part number below in order to differentiate from the manufacturer calibration option. Once the form has been submitted, a member of our RMA team will reach out to provide an RMA Number, return instructions, and to verify billing and payment information.

   Submit Calibration Request

2. Within the selected calibration item in the Price Box below, enter the Item # and Serial # of the sensor that requires recalibration, and then Add to Cart. If you would like a console calibrated with your sensor, repeat this process for Item # CAL-PM1, CAL-PM1D, CAL-PM2, or CAL-PM2D below, entering the console Item # and Serial #. A member of our RMA team will reach out to coordinate the return of the item(s) for calibration. Note that each console calibration Item # represents the cost of calibrating a console alone; if requesting a single-channel console calibration with a sensor calibration, the appropriate discount will be applied when your request is processed. Should you have other items in your cart, note that the calibration request will be split off from your order for RMA processing.

Please Note: To ensure your item being returned for calibration is routed appropriately once it arrives at our facility, please do not ship it prior to being provided an RMA Number and return instructions by a member of our team.

Universal (7 Items) — Items Ship from Newton, NJ

Item		Docs	Available	Price	Qty
CAL-UVPDD	ISO 17025 Accredited Calibration Service for S120VC UV-Extended Silicon Photodiode Power Sensor Item #: Item Number Serial #: Serial Number			$597.98	*Qty: 1*
CAL-PDD	ISO 17025 Accredited Calibration Service for Single-Power-Range Silicon Photodiode Power Sensors Item #: Item Number Serial #: Serial Number			$518.35	*Qty: 1*
CAL-UVPD2D	ISO 17025 Accredited Calibration Service for S130VC Extended-UV Silicon Photodiode Power Sensor Item #: Item Number Serial #: Serial Number			$710.10	*Qty: 1*
CAL-PD2D	ISO 17025 Accredited Calibration Service for Dual-Power-Range Silicon Photodiode Power Sensors Item #: Item Number Serial #: Serial Number			$531.30	*Qty: 1*
CAL-IRPDD	ISO 17025 Accredited Calibration Service for Single-Power-Range Germanium or InGaAs Photodiode Power Sensors Item #: Item Number Serial #: Serial Number			$584.57	*Qty: 1*

Item		Docs	Available	Price	Qty
CAL-IRPD2D	ISO 17025 Accredited Calibration Service for Dual-Power-Range Germanium or InGaAs Photodiode Power Sensors Item #: Item Number Serial #: Serial Number			$639.69	*Qty: 1*
CAL-MIRPDD	ISO 17025 Accredited Calibration Service for Extended InGaAs Photodiode Power Sensors Item #: Item Number Serial #: Serial Number			$921.23	*Qty: 1*

Manufacturer Recalibration Service for Thermal Power and Pyroelectric Energy Sensors

Thorlabs offers recalibration services for our Thermal Power and Pyroelectric Energy Sensors. To ensure accurate measurements, we recommend recalibrating the sensors annually. Recalibration of a single-channel power and/or energy meter console or interface is included with the recalibration of a sensor at no additional cost. If you wish to calibrate one or more sensors with a dual-channel console, each sensor and console calibration service will need to be purchased individually.

Please note that the CAL-THPY recalibration service cannot be used for our Thermal Position & Power Sensors; recalibration for these sensors can be requested by contacting Tech Support. Table 317A lists the sensors for which the CAL-THPY recalibration service is available.

Table 317A Compatibility

Sensor Type	Sensor Item #s
Thermal Power	S175C, S302C[a], S305C[a], S310C[a], S314C[a],S322C, S350C, S370C, S401C, S405C, S415C, S425C, S425C-L, S470C, PM160T, PM160T-HP, PM16-401, PM16-405
Pyroelectric Energy	ES111C, ES120C, ES145C, ES220C, ES245C, ES308C, ES312C, ES408C, ES412C

a. This former catalog item is now offered as a special.

Requesting a Calibration

Thorlabs provides two options for requesting a calibration:

1. Complete the Returns Material Authorization (RMA) form. When completing the RMA form, please enter your name and contact information; enter your Item Number, Quantity, and the Serial # of each item being returned for calibration after answering "No" to "Return Entire Order?" In the *Reason for Return* field, select "I would like to calibrate an item." All other fields are optional. Once the form has been submitted, a member of our RMA team will reach out to provide an RMA Number, return instructions, and to verify billing and payment information.

Submit Calibration Request

2. Enter the Item # and Serial # of the item that requires recalibration below and then Add to Cart. If you would like a console calibrated with your sensor, repeat this process for Item # CAL-PM1 or CAL-PM2 below, entering the console Item # and Serial #. A member of our RMA team will reach out to coordinate the return of the item(s) for calibration. Note that each console calibration Item # represents the cost of calibrating a console alone; if requesting a single-channel console calibration with a sensor calibration, the appropriate discount will be applied when your request is processed. Should you have other items in your cart, note that the calibration request will be split off from your order for RMA processing.

Please Note: To ensure your item being returned for calibration is routed appropriately once it arrives at our facility, please do not ship it prior to being provided an RMA Number and return instructions by a member of our team. Pyroelectric energy sensors returned for recalibration or servicing must include the separate BNC to DB9 adapter, which contains the sensor EEPROM.

Universal (1 Item) — Items Ship from Newton, NJ

Item		Docs	Available	Price	Qty
CAL-THPY	Recalibration Service for Thermal Power and Pyroelectric Energy Sensors at 1064 nm Item #: Item Number Serial #: Serial Number			$227.50	*Qty: 1*

Manufacturer Recalibration of Power & Energy Meter Electronics

These traceable recalibration services are for the power and/or energy meter electronics of our consoles and interfaces. To ensure accurate measurements, we recommend recalibrating annually. The manufacturer calibration of a power sensor includes recalibration of a single-channel console or interface at no additional cost; this is unavailable for the accredited calibration option. If you wish to calibrate one or more sensors with a dual-channel console, each sensor and console calibration service will need to be purchased individually. For more details on these recalibration services, please click the Documents ( ) icons below.

Table 719A lists the power and/or energy meter consoles and interfaces that can be calibrated using the CAL-PM1 and CAL-PM2 recalibration services.

Table 719A Compatibility	
Calibration Service Item #	**Compatible Consoles & Interfaces**
Single-Channel	
CAL-PM1	PM100D2, PM100D3, PM100A, PM400, PM100USB, PM100D[a] PM101 Series, PM102 Series, PM103 Series
Dual-Channel	
CAL-PM2	PM5020 and PM320E[a]

a. This previous-generation item is no longer available for purchase.

Requesting a Calibration
Thorlabs provides two options for requesting a calibration:

1. Complete the Returns Material Authorization (RMA) form. When completing the RMA form, please enter your name and contact information; enter your Item Number, Quantity, and the Serial Number of each item being returned for calibration after answering "No" to "Return Entire Order?" In the *Reason for Return* field, select "I would like to calibrate an item." In the *Additional Details* field, please indicate "Manufacturer Calibration" or the desired calibration part number below in order to differentiate from the ISO 17025 accredited calibration option. Once the form has been submitted, a member of our RMA team will reach out to provide an RMA Number, return instructions, and to verify billing and payment information.

   Submit Calibration Request

2. Within the selected calibration item in the Price Box below, enter the Item # and Serial # of the item that requires recalibration, and then Add to Cart. If you would like to calibrate one or more sensors with your console, repeat this process for the appropriate sensor recalibration service above, entering the console Item # and Serial #. A member of our RMA team will reach out to coordinate return of the item(s) for calibration. Note that each console calibration Item # represents the cost of calibrating a console alone; if requesting a single-channel console calibration with a sensor calibration, the appropriate discount will be applied when your request is processed. Should you have other items in your cart, note that the calibration request will be split off from your order for RMA processing.

Please Note: To ensure your item being returned for calibration is routed appropriately once it arrives at our facility, please do not ship it prior to being provided an RMA Number and return instructions by a member of our team.

Universal (2 Items) — Items Ship from Newton, NJ

Item		Docs	Available	Price	Qty
CAL-PM1	Manufacturer Recalibration of Single-Channel Power and/or Energy Meter Electronics Item #: Item Number Serial #: Serial Number			$84.32	*Qty: 1*
CAL-PM2	Manufacturer Recalibration of Dual-Channel Power and Energy Meter Electronics Item #: Item Number Serial #: Serial Number			$224.83	*Qty: 1*

In-House ISO 17025 Accredited Recalibration of Power & Energy Meter Electronics

These ISO 17025 accredited recalibration services are for the power and/or energy meter electronics of our consoles and interfaces. If you wish to calibrate one or more sensors with a console, each sensor and console calibration service will need to be purchased individually. ISO 17025 accredited calibrations are performed in accordance with DIN EN ISO/IEC 17025:2018. Thorlabs GmbH's calibration laboratory is accredited by the German Accreditation Body (DAkkS), the national accreditation authority of the Federal Republic of Germany. The scope of services is described here in English or German. For more details on these recalibration services, please see the *Recalibration* tab or click the Documents ( ) icons below.

Table 792A lists the power and/or energy meter consoles and interfaces that can be calibrated using the CAL-PM1D and CAL-PM2D recalibration services.

Table 792A Compatibility

Calibration Service Item #	Compatible Consoles & Interfaces
Single-Channel	
CAL-PM1D	PM100D2, PM100D3, PM100A, PM400, PM100USB, PM100D[a] PM101 Series, PM102 Series, PM103 Series
Dual-Channel	
CAL-PM2D	PM5020

a. This previous-generation item is no longer available for purchase.

Requesting a Calibration
Thorlabs provides two options for requesting a calibration:

1. Complete the Returns Material Authorization (RMA) form. When completing the RMA form, please enter your name and contact information; enter your Item Number, Quantity, and the Serial Number of each item being returned for calibration after answering "No" to "Return Entire Order?" In the *Reason for Return* field, select "I would like to calibrate an item." In the *Additional Details* field, please indicate "ISO 17025 Accredited Calibration" or the desired calibration part number below in order to differentiate from the manufacturer calibration option. Once the form has been submitted, a member of our RMA team will reach out to provide an RMA Number, return instructions, and to verify billing and payment information.

Submit Calibration Request

2. Within the selected calibration item in the Price Box below, enter the Item # and Serial # of the item that requires recalibration, and then Add to Cart. If you would like to calibrate one or more sensors with your console, repeat this process for the appropriate sensor recalibration service above, entering the console Item # and Serial #. A member of our RMA team will reach out to coordinate return of the item(s) for calibration. Note that each console calibration Item # represents the cost of calibrating a console alone; if requesting a single-channel console calibration with a sensor calibration, the appropriate discount will be applied when your request is processed. Should you have other items in your cart, note that the calibration request will be split off from your order for RMA processing.

Please Note: To ensure your item being returned for calibration is routed appropriately once it arrives at our facility, please do not ship it prior to being provided an RMA Number and return instructions by a member of our team.

Universal (2 Items) — Items Ship from Newton, NJ

Item		Docs	Available	Price	Qty
CAL-PM1D	ISO 17025 Accredited Calibration for Single-Channel Power and/or Energy Meter Electronics Item #: Item Number Serial #: Serial Number			$244.22	*Qty: 1*
CAL-PM2D	ISO 17025 Accredited Calibration for Dual-Channel Power and/or Energy Meter Electronics Item #: Item Number Serial #: Serial Number			$545.51	*Qty: 1*

TrustedSite CERTIFIED SECURE