

ASPHERIC COEFFICIENTS

	R	k	A_4	A_6	A_8	A_{10}	A_{12}	A_{14}	A_{16}
S1	PLANO	-	-	-	-	-	-	-	-
S2	-2.175094	-1.276412	-8.869159E-03	3.082162E-05	8.569050E-06	3.809811E-06	-1.937629E-07	-	-

ASPHERIC LENS EQUATION

$$z = \frac{Y^2}{R(1+\sqrt{1-(1+k)Y^2/R^2})} + A_4Y^4 + A_6Y^6 + A_8Y^8 + A_{10}Y^{10} + A_{12}Y^{12} + A_{14}Y^{14} + A_{16}Y^{16}$$

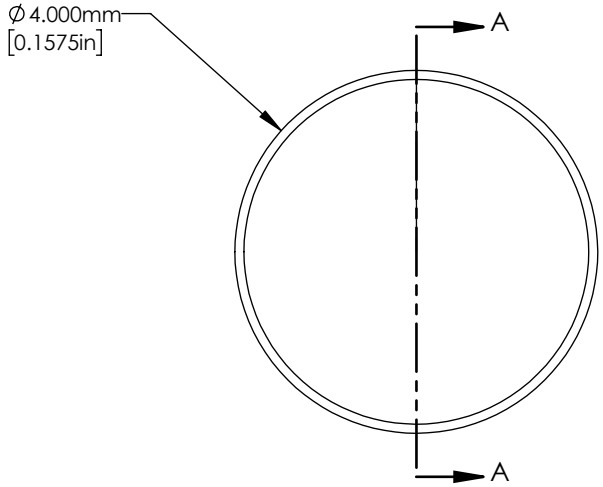

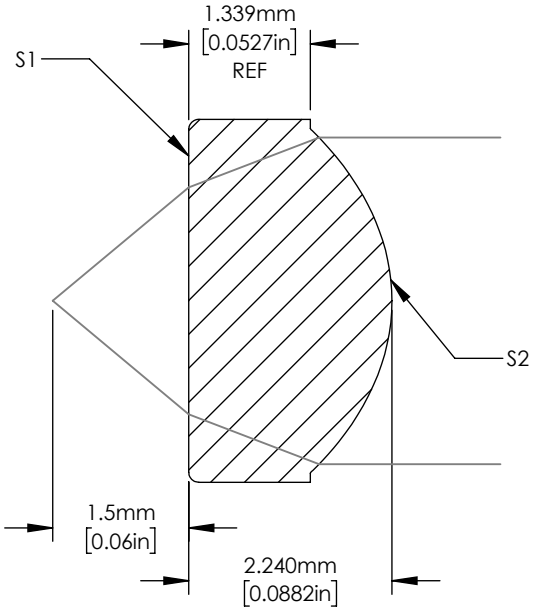

SECTION A-A

NOTES/SPECIFICATIONS:

1. MATERIAL: D-ZLAF52LA
2. REFRACTIVE INDEX: 1.806 @ 587.6nm
3. DESIGN WAVELENGTH: 830 nm
4. CLEAR APERTURE: (S1): ∅2.50 mm
   (S2): ∅3.60 mm
5. EFFECTIVE FOCAL LENGTH: 2.8 mm ±1.0%
6. NUMERICAL APERTURE: 0.60
7. DIAMETER TOLERANCE: ±0.015 mm
8. CENTER THICKNESS TOLERANCE: ±0.020 mm
9. SURFACE QUALITY: 40-20 SCRATCH-DIG
10. RMS WFE: ≤ DIFFRACTION LIMITED
11. MAGNIFICATION: INFINITE
12. COATING (S1&S2): BBAR Ravg <0.5% 350-700 nm

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	RJ	12/DEC/11
APPROVAL	JAC	18/DEC/23

COPYRIGHT © 2011 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

0.60 NA ASPHERIC LENS
f=2.8 mm, DW=830 nm, A COATED

MATERIAL	REV
SEE NOTES	C

ITEM #	APPROX WEIGHT
355392-A	0.1g