ASPHERIC COEFFICIENTS


	R	k	A_4	A_6	A_8	A_{10}	A_{12}
S1	72.47	-	-	-	-	-	-
S2	-5.97	-	3.3835580E-04	1.3053900E-05	-1.0982500E-06	1.3742680E-07	-5.49555E-09


$$z = \frac{Y^2}{R(1+\sqrt{1-(1+k)Y^2/R^2})} + A_4Y^4 + A_6Y^6 + A_8Y^8 + A_{10}Y^{10} + A_{12}Y^{12}$$

ASPHERIC LENS EQUATION



ISOMETRIC VIEW
1 : 1

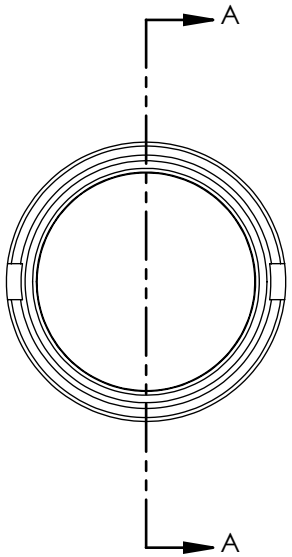

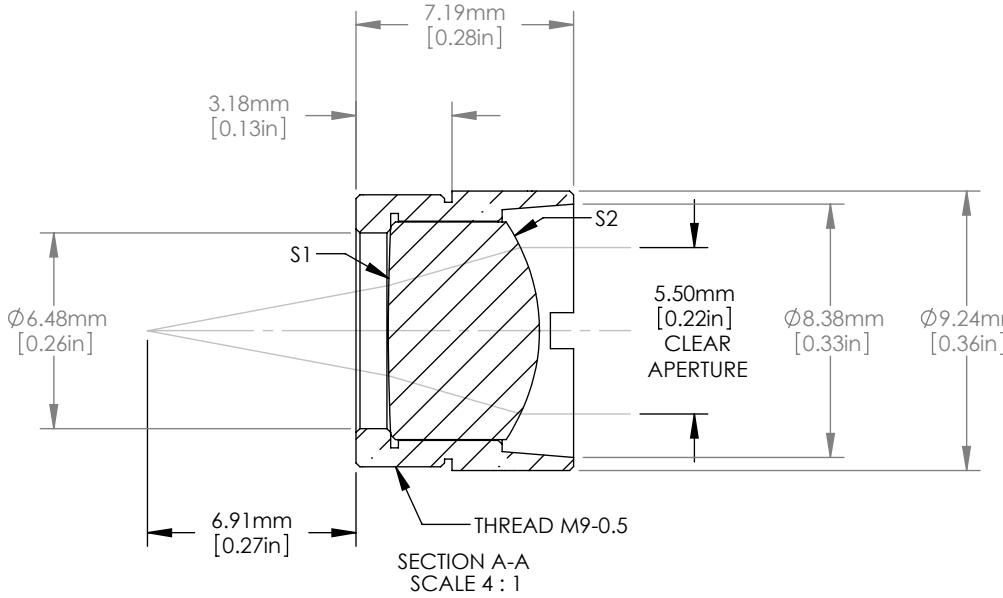

SECTION A-A
SCALE 4 : 1

NOTES/SPECIFICATIONS:

1. DESIGN WAVELENGTH: 633nm
2. EFFECTIVE FOCAL LENGTH: 11.00mm
3. EFL TOLERANCE: ±1%
4. NUMERICAL APERTURE: 0.26
5. WORKING DISTANCE: 6.91mm
6. DIAMETER TOLERANCE: +0.00mm/-0.02mm(HOUSING)
7. CENTER THICKNESS TOLERANCE: ±0.04mm(LENS)
8. LASER WINDOW THICKNESS: 0.275mm (N-BK7)
9. SURFACE QUALITY: 60-40 SCRATCH-DIG (INCLUDES ENTIRE BULK MATERIAL)
10. RMS WFE(TYPICAL): 0.030 WAVES
11. MAGNIFICATION: INFINITE
12. REFRACTIVE INDEX (AT DESIGN WAVELENGTH): 1.513
13. COATING(S1&S2): BBAR Ravg<0.5% FROM 350-700nm

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	SS	15/DEC/10
APPROVAL	PM	25/MAR/13

COPYRIGHT © 2010 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

MOUNTED -A COATED ASPHERIC COLLIMATING LENS EFL=11.00mm

MATERIAL	REV
D-K59	H

ITEM #	APPROX WEIGHT
A220TM-A	0.2g