ASPHERIC COEFFICIENTS


	R	k	A_2	A_4	A_6	A_8	A_{10}
S1	42.19	-	-	-	-	-	-
S2	-3.50	-0.3366000	-	8.4900000E-04	4.7770000E-05	4.9590000E-06	-3.3740000E-09


$$z = \frac{Y^2}{R(1+\sqrt{1-(1+k)Y^2/R^2})} + A_2Y^2 + A_4Y^4 + A_6Y^6 + A_8Y^8 + A_{10}Y^{10}$$

ASPHERIC LENS EQUATION



ISOMETRIC VIEW
1 : 1

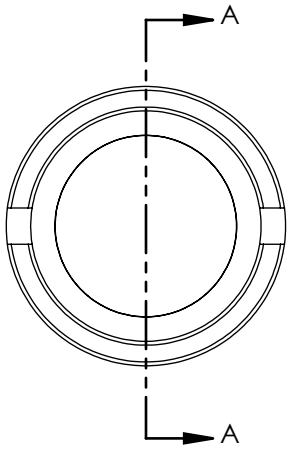

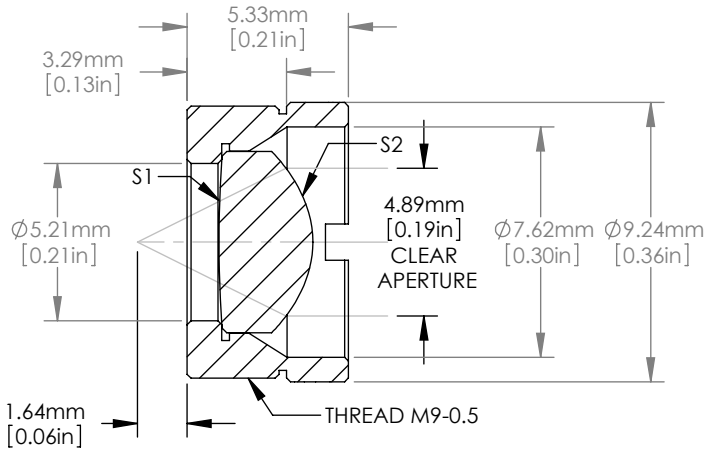

SECTION A-A
SCALE 4 : 1

NOTES/SPECIFICATIONS:

1. DESIGN WAVELENGTH: 655nm
2. EFFECTIVE FOCAL LENGTH: 4.60mm
3. EFL TOLERANCE: ±1%
4. NUMERICAL APERTURE: 0.53
5. WORKING DISTANCE: 1.64mm
6. DIAMETER TOLERANCE: +0.00mm/-0.02mm(HOUSING)
7. CENTER THICKNESS TOLERANCE: ±0.04mm(LENS)
8. LASER WINDOW THICKNESS: 0.275mm (N-BK7)
9. SURFACE QUALITY: 60-40 SCRATCH-DIG (INCLUDES ENTIRE BULK MATERIAL)
10. RMS WFE(TYPICAL): 0.065 WAVES
11. MAGNIFICATION: INFINITE
12. REFRACTIVE INDEX (AT DESIGN WAVELENGTH): 1.724
13. COATING(S1&S2): BBAR Ravg<0.5% FROM 350-700nm

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	SS	10/DEC/10
APPROVAL	PM	25/MAR/13

COPYRIGHT © 2010 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

MOUNTED -A COATED ASPHERIC COLLIMATING LENS EFL=4.60mm

MATERIAL	REV
H-LAK54	F

ITEM #	APPROX WEIGHT
A390TM-A	0.02 kg