


	MATERIAL
1	N-SK16
2	N-LASF9



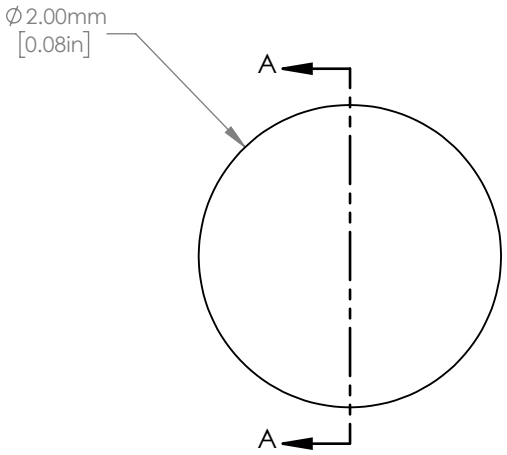

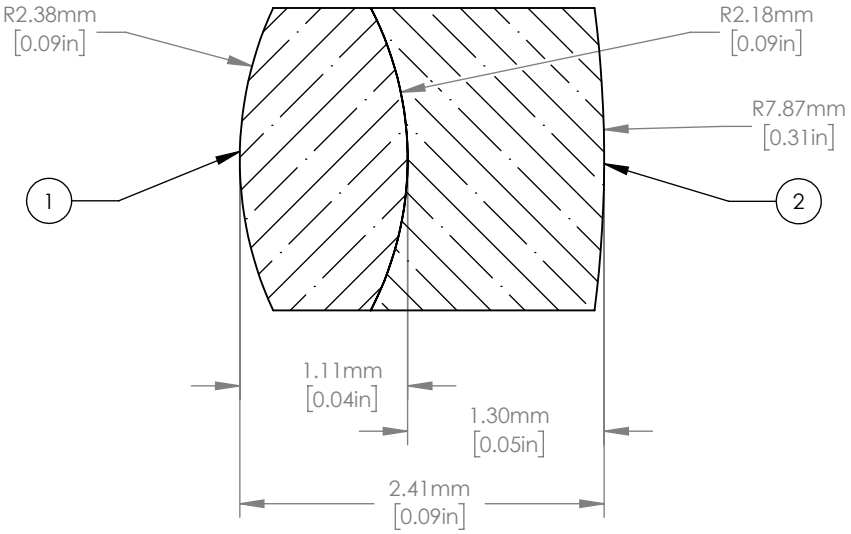

NOTES/SPECIFICATIONS:

1. DESIGN WAVELENGTHS: 486.1nm, 587.6nm, 656.3nm
2. FOCAL LENGTH: 4.00mm ±2% AT 587.6nm
3. BACK FOCAL LENGTH (REF): 2.92mm
4. CLEAR APERTURE: > ∅1.8mm
5. SURFACE QUALITY: 20-10 SCRATCH-DIG
6. CENTRATION: <15 arcmin
7. DIAMETER TOLERANCE: +0/-0.025mm
8. THICKNESS TOLERANCE: ±0.10mm
9. COATING (ON OUTER OPTICAL SURFACES): BBAR 400-700nm, Ravg <0.5%, 0° AOI

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	MG	23/FEB/23
APPROVAL	BW	23/FEB/23

COPYRIGHT © 2023 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

∅2mm, f=4mm VIS ACHROMAT, -A COATING

MATERIAL	REV
SEE TABLE	A

ITEM #	APPROX WEIGHT
AC020-004-A	0.03 g