


	MATERIAL
①	N-LAK22
②	N-SF6HT



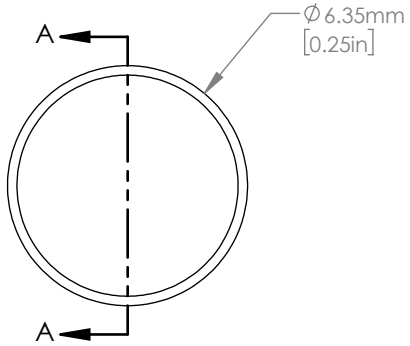

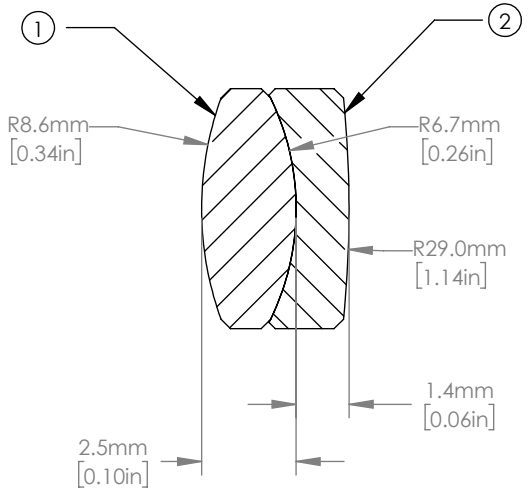

SECTION A-A

NOTES/SPECIFICATIONS:

1. DESIGN WAVELENGTH: 706.5 nm, 855.0 nm, 1015.0 nm
2. FOCAL LENGTH: 12.7 mm ± 1% @855.0 nm
3. BACK FOCAL LENGTH (REF): 10.7 mm
4. CLEAR APERTURE: > ∅5.72 mm
5. SURFACE QUALITY: 40-20 SCRATCH-DIG
6. CENTRATION: <3 arcmin
7. DIAMETER TOLERANCE: +0.0/-0.1 mm
8. THICKNESS TOLERANCE: ±0.2 mm
9. COATING: BBAR Ravg <0.5% FROM 650-1050 nm, 0˚ AOI, ON OUTER OPTICAL SURFACES

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	KMR	20/SEP/16
APPROVAL	YB	28/MAR/25

COPYRIGHT © 2016 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

∅6.35mm, f=12.7 mm
NEAR IR ACHROMAT, -B COAT

MATERIAL	REV
SEE TABLE	E

ITEM #	APPROX WEIGHT
AC064-013-B	0.39 g