

	MATERIAL
1	N-LAK22
2	N-SF6



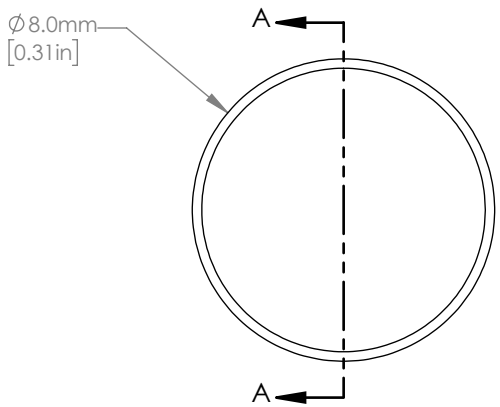

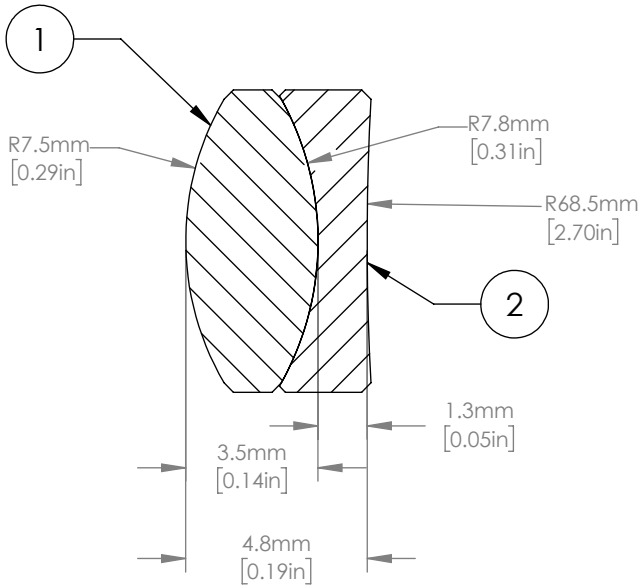

NOTES/SPECIFICATIONS:

1. DESIGN WAVELENGTH: 1016.0nm, 1330.0nm, 1550.0nm
2. FOCAL LENGTH: 16.0mm ±1% AT 1330.0nm
3. BACK FOCAL LENGTH(REF): 12.3mm
4. CLEAR APERTURE: > ∅7.20mm
5. SURFACE QUALITY: 40-20 SCRATCH-DIG
6. CENTRATION: <3arcmin
7. DIAMETER TOLERANCE: +0.0/-0.1mm
8. THICKNESS TOLERANCE: ±0.20mm
9. COATING: BBAR Ravg <0.5% FROM 1050-1700nm, AOI: 0° ON OUTER OPTICAL SURFACES

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	KMC	05/AUG/16
APPROVAL	DD	03/JUL/17

COPYRIGHT © 2017 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

∅8.0mm, f=16.0mm
IR ACHROMAT, -C COAT

MATERIAL	REV
SEE TABLE	E

ITEM #	APPROX WEIGHT
AC080-016-C	0.77 g