



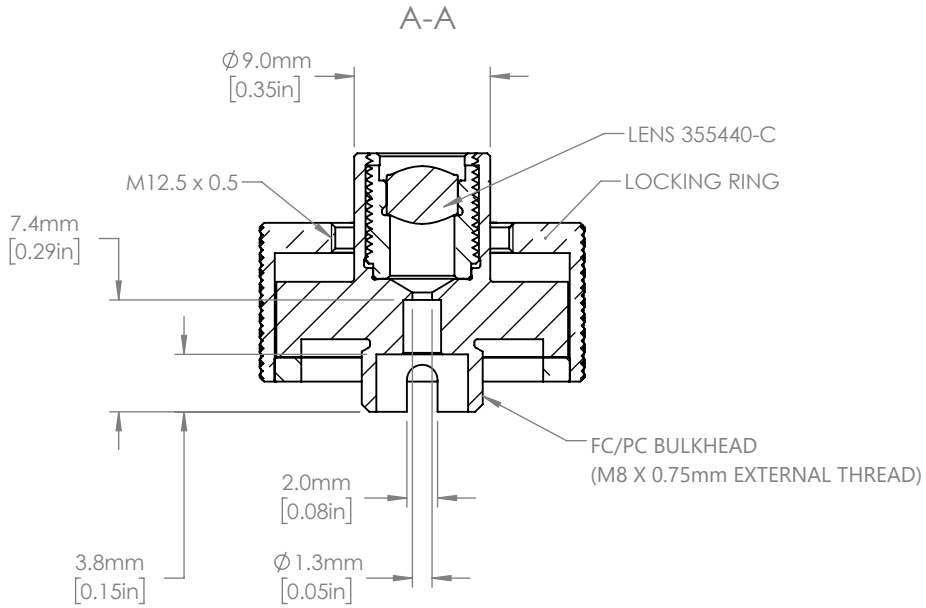


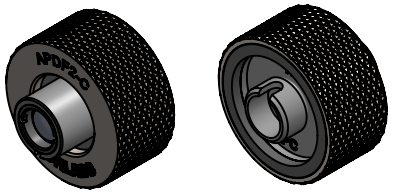


SPECIFICATIONS	
FIBER CONNECTOR TYPE	FC/PC NARROW KEY
OPERATING WAVELENGTH RANGE	1050-1700nm
AR COATING	BBAR Ravg <0.5% FROM 1050-1700nm, AOI=0°

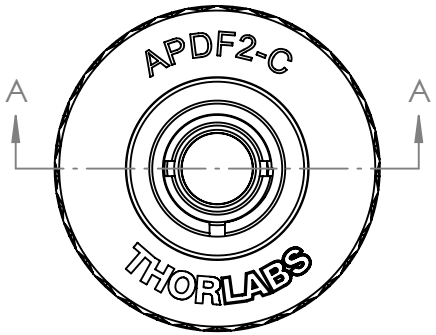

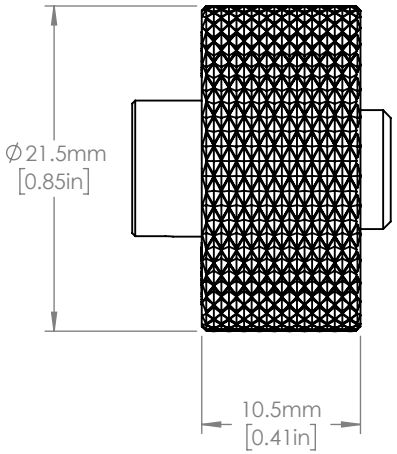



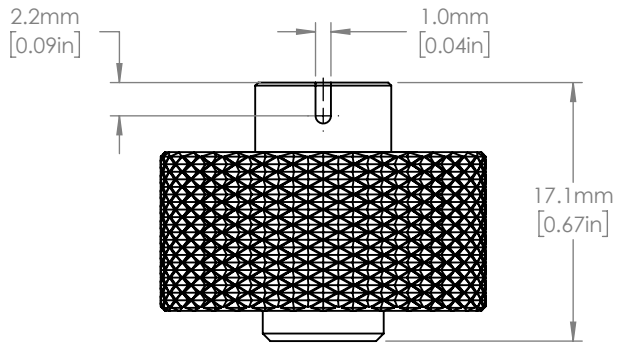

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	MUR	06/MAR/24
APPROVAL	SWI	07/MAR/24

COPYRIGHT ©2024 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

APD Fiber Adapter FC/PC Narrow, ARC:1050-1700nm

MATERIAL	REV
N/A	A

ITEM #	APPROX WEIGHT
APDF2-C	20 g