

	R	k	A_4	A_6	A_8	A_{10}	A_{12}	A_{14}
S1	13.984	-1	1.6224686E-5	-5.2804848E-9	-3.9073587E-11	-4.128074E-14	1.133365E-16	2.5522566E-19
S2	-	-	-	-	-	-	-	-


$$z = \frac{Y^2}{R(1+\sqrt{1-(1+k)Y^2/R^2})} + A_4Y^4 + A_6Y^6 + A_8Y^8 + A_{10}Y^{10} + A_{12}Y^{12} + A_{14}Y^{14}$$

ASPHERIC LENS EQUATION



1:2 ISOMETRIC VIEW

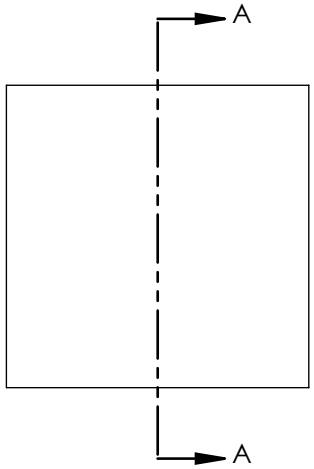

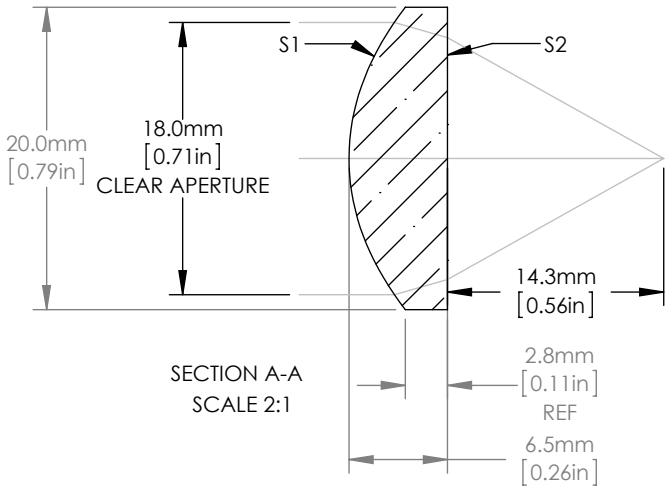

SECTION A-A
SCALE 2:1

NOTES/SPECIFICATIONS:

1. REFRACTIVE INDEX AT DESIGN WAVELENGTH: 1.777
2. DESIGN WAVELENGTH: 780nm
3. FOCAL LENGTH: EFL = 18.00mm ± 1%
4. NUMERICAL APERTURE: 0.45
5. WORKING DISTANCE: 14.3mm
6. MAGNIFICATION: INFINITE
7. SURFACE QUALITY: 60-40 SCRATCH-DIG
8. RMS WFE: < 0.5 µm
9. CLEAR APERTURE (COLLIMATING): 18.0 X 18.0 MM
10. CLEAR APERTURE (FOCUSING): 18.0 X 16.0 mm
11. CENTER THICKNESS: 6.5 mm
12. COATING(S1,S2): BBAR
    650-1050nm; Ravg < 0.5%
    0° AOI

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	NG	02/21/2012
APPROVAL	PM	20/26/2012

COPYRIGHT © 2012 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

20mm SQUARE, CYLINDRICAL ASPHERIC LENS, EFL=18.00mm, ARC 650-1050nm

MATERIAL	REV
S-LAH64	A

ITEM #	APPROX WEIGHT
AYL2018-B	5.1 g