


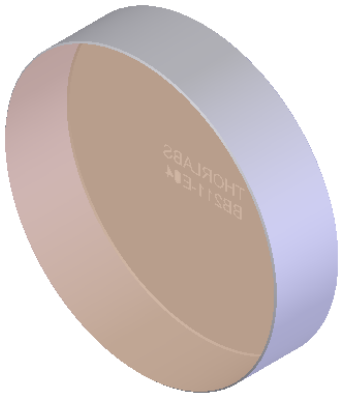


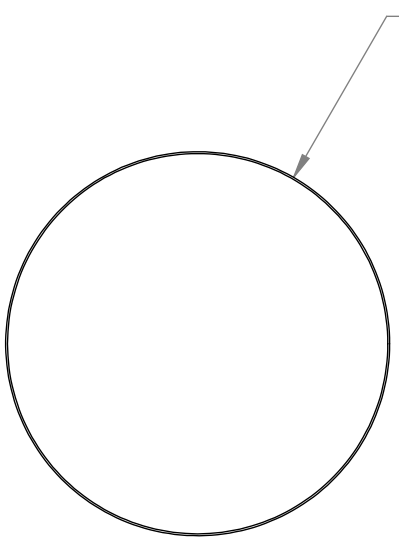

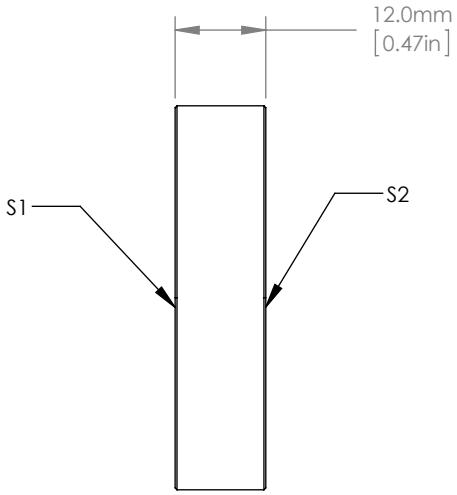

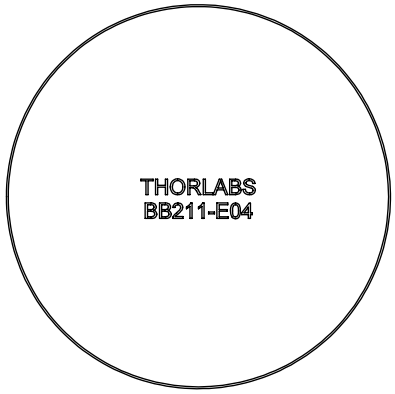

NOTES/SPECIFICATIONS

1. CLEAR APERTURE: >85% DIAMETER
2. SURFACE QUALITY: 10-5 SCRATCH-DIG
3. SURFACE FLATNESS (S1): λ/10 AT 632.8nm
   SURFACE FINISH (S2): FINE GROUND
4. PARALLELISM: ≤ 3arcmin
5. DIAMETER TOLERANCE: + 0.0/-0.1mm
6. THICKNESS TOLERANCE: ±0.2mm
7. COATING(S1): BROADBAND HR, DIELECTRIC
   R_S AND R_P > 99% FROM 1280-1600nm
   AOI: 0° TO 45°

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	LM	23/JUL/15
APPROVAL	CS	04/AUG/15

COPYRIGHT © 2015 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

Ø 50.8mm BROADBAND ZERODUR® MIRROR
1280-1600nm

MATERIAL	REV
ZERODUR®	A

ITEM #	APPROX WEIGHT
BB211-E04	0.05kg