



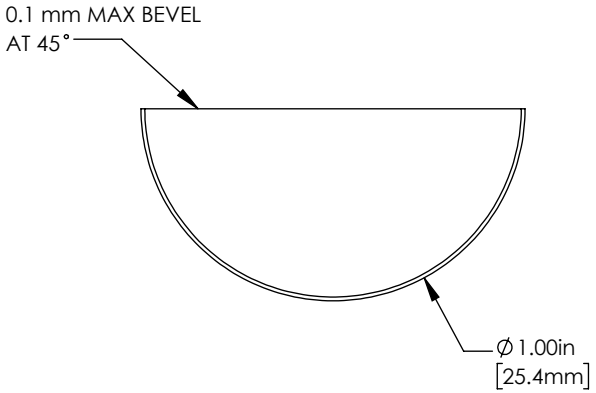

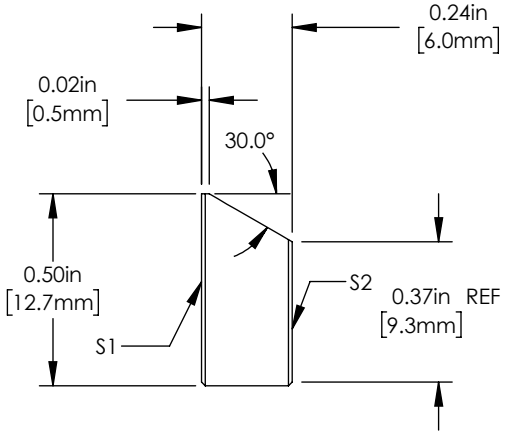

NOTES/SPECIFICATIONS:

1. CLEAR APERTURE: > Ø22.86 mm
2. SURFACE QUALITY: 10-5 SCRATCH-DIG
3. SURFACE FLATNESS (S1): λ/10 AT 633 nm
   (S2): FINE GRIND
4. PARALLELISM: ≤ 5 arcmin
5. DESIGN WAVELENGTH RANGE: 1280-1600 nm
6. COATING (S1): BROADBAND HR, DIELECTRIC DESIGN
   Ravg:>99% FROM 1280-1600 nm
   AOI: 0° TO 45°

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	ES	22/FEB/21
APPROVAL	JC	17/SEP/21

COPYRIGHT © 2021 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

Ø25.4 mm BROADBAND DIELECTRIC "D" SHAPED MIRROR 1280-1600 nm

MATERIAL	REV
FUSED SILICA	B

ITEM #	APPROX WEIGHT
BBD1-E04	3 g