

	PART	MATERIAL
1	354060-A	D-ZK3
2	LENS MOUNT	303 STAINLESS STEEL



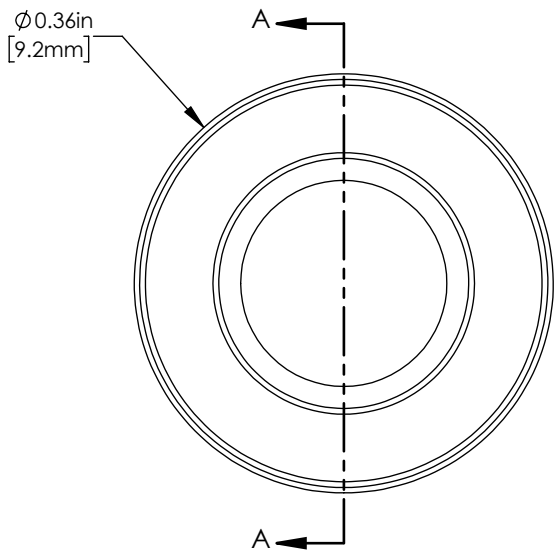

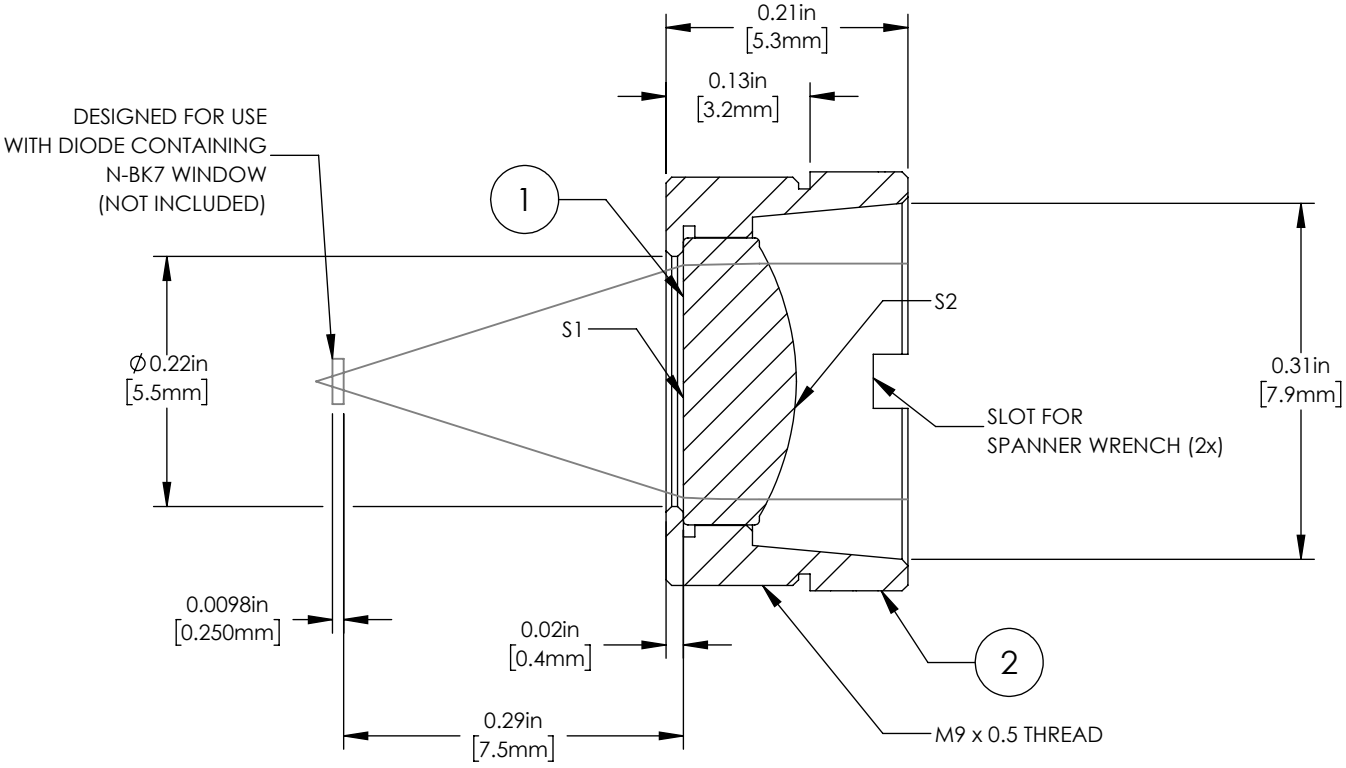

SECTION A-A

NOTES/SPECIFICATIONS:
1. MATERIAL: D-ZK3
2. REFRACTIVE INDEX: 1.586 @ 587.6nm
3. DESIGN WAVELENGTH: 633 nm
4. CLEAR APERTURE:
   (S1): ∅5.13 mm
   (S2): ∅5.20 mm
5. LASER WINDOW MATERIAL: N-BK7
   WINDOW THICKNESS: 0.250mm
   REFRACTIVE INDEX: 1.517 @ 587.6nm
6. EFFECTIVE FOCAL LENGTH: 9.6 mm±1.0%
7. NUMERICAL APERTURE: 0.27
8. CENTER THICKNESS TOLERANCE: ±0.050 mm (LENS)
9. SURFACE QUALITY: 60-40 SCRATCH-DIG (INCLUDES ENTIRE BULK MATERIAL)
10. RMS WFE: ≤ DIFFRACTION LIMITED
11. COATING(S1&S2): BBAR Ravg<0.5% FROM 350-700 nm, AOI: 0°
12. FOR ASPHERIC COEFFICENTS SEE UNMOUNTED LENS, PART NUMBER 354060-A

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	JAC	24/DEC/19
APPROVAL	DD	05/DEC/23

COPYRIGHT © 2019 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

MOUNTED 0.27 NA ASPHERIC LENS, f=9.6 mm, DW=633 nm, A COATED

MATERIAL	REV
SEE TABLE	B

ITEM #	APPROX WEIGHT
C060TMD-A	1.22 g