

	PART	MATERIAL
1	355110-A	D-ZLAF52LA
2	LENS MOUNT	303 STAINLESS STEEL



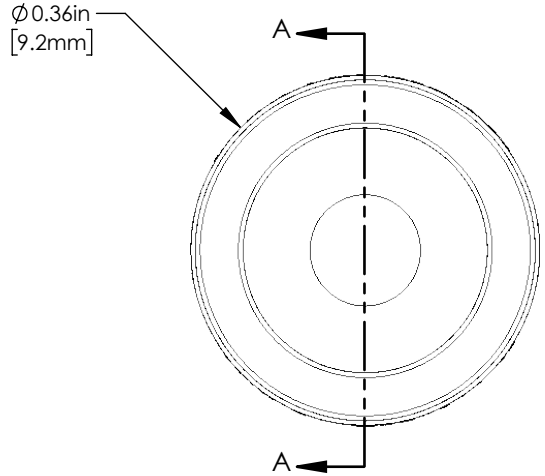

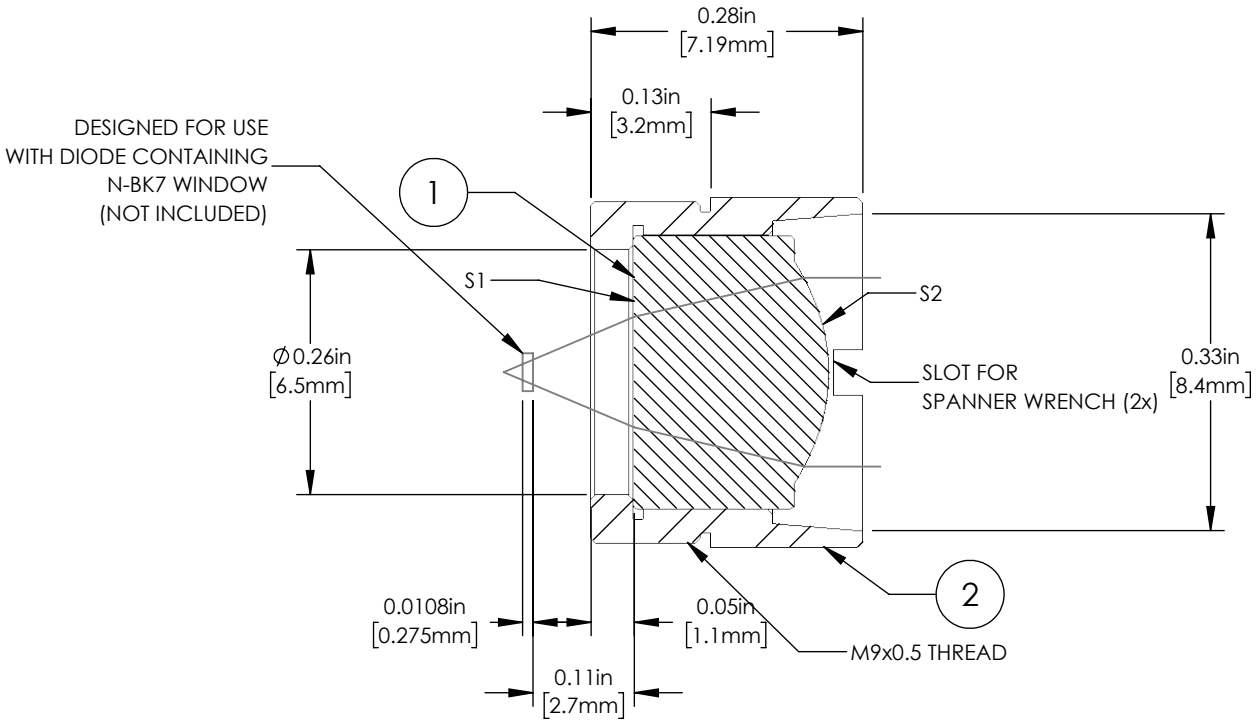

SECTION A-A

NOTES/SPECIFICATIONS:
1. MATERIAL: D-ZLAF52LA
2. REFRACTIVE INDEX: 1.806 @ 587.6nm
3. DESIGN WAVELENGTH: 780nm
4. CLEAR APERTURE:
   (S1): Ø2.93mm
   (S2): Ø5.00mm
5. LASER WINDOW MATERIAL: N-BK7
   WINDOW THICKNESS: 0.275mm
   REFRACTIVE INDEX: 1.517 @ 587.6nm
6. EFFECTIVE FOCAL LENGTH: 6.2mm±1.0%
7. NUMERICAL APERTURE: 0.40
8. CENTER THICKNESS TOLERANCE: ±0.050mm (LENS)
9. SURFACE QUALITY: 40-20 SCRATCH-DIG (INCLUDES ENTIRE BULK MATERIAL)
10. RMS WFE: ≤ DIFFRACTION LIMITED
11. COATING(S1&S2): BBAR Ravg<0.5% FROM 350-700nm, AOI=0°
12. FOR ASPHERIC COEFFICENTS SEE UNMOUNTED LENS, PART NUMBER 355110-A

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	GG	25/FEB/14
APPROVAL	JAC	05/DEC/23

COPYRIGHT © 2014 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

MOUNTED 0.40 NA ASPHERIC LENS, f=6.2mm, DW=780nm, A COATED

MATERIAL	REV
SEE TABLE	B

ITEM #	APPROX WEIGHT
C110TMD-A	2.06 g