

	PART	MATERIAL
1	354260-A	D-ZK3
2	LENS MOUNT	303 STAINLESS STEEL



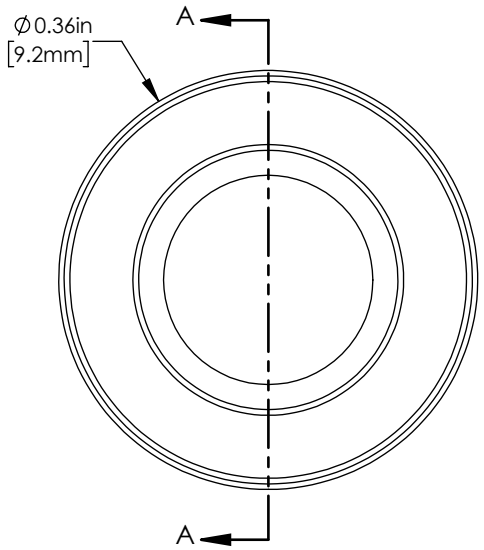

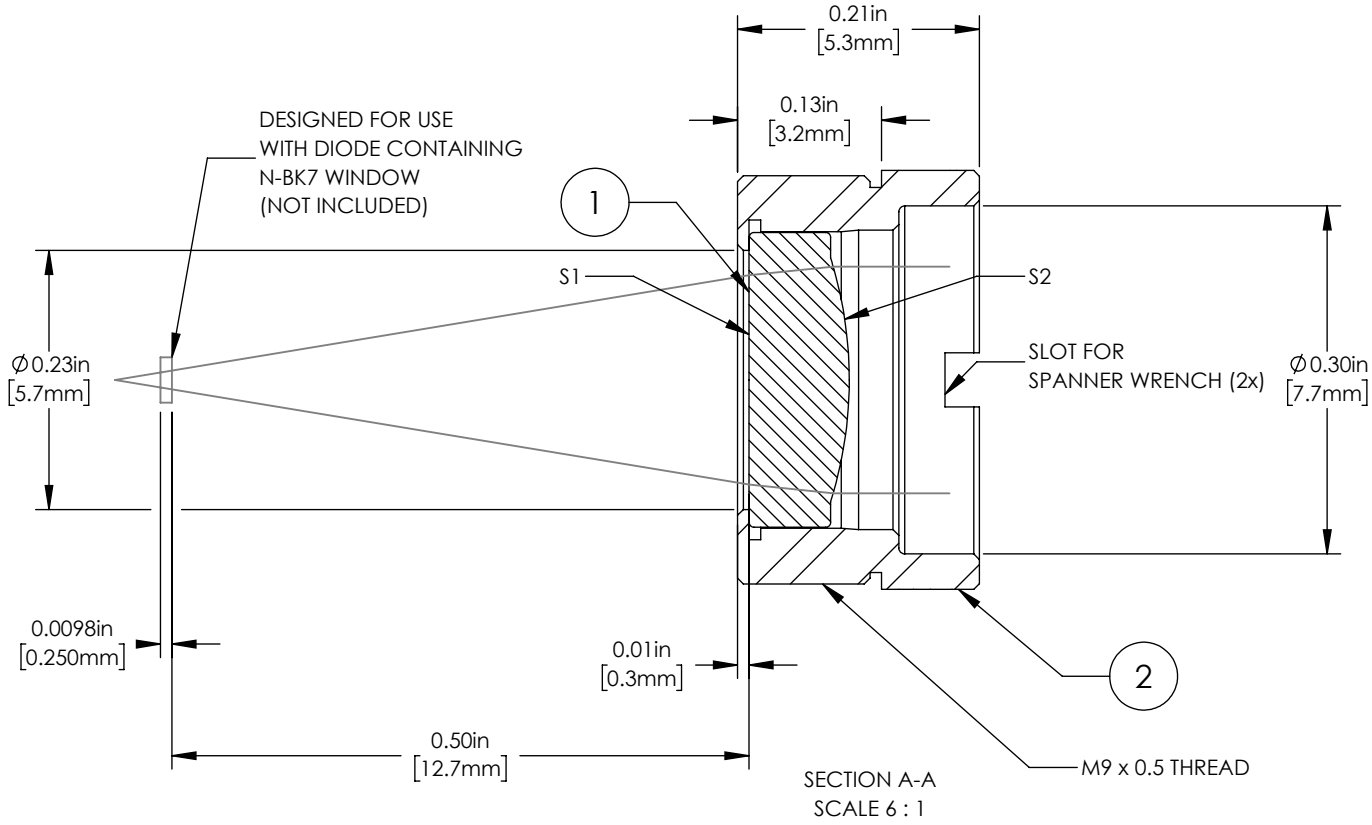

SECTION A-A
SCALE 6 : 1

NOTES/SPECIFICATIONS:
1. MATERIAL: D-ZK3
2. REFRACTIVE INDEX: 1.586 @ 587.6nm
3. DESIGN WAVELENGTH: 780nm
4. CLEAR APERTURE:
   (S1): ∅4.61 mm
   (S2): ∅5.00 mm
5. LASER WINDOW MATERIAL: N-BK7
   WINDOW THICKNESS: 0.250mm
   REFRACTIVE INDEX: 1.517 @ 587.6nm
6. EFFECTIVE FOCAL LENGTH: 15.3mm±1%
7. NUMERICAL APERTURE: 0.16
8. CENTER THICKNESS TOLERANCE: ±0.04mm (LENS)
9. SURFACE QUALITY: 40-20 SCRATCH-DIG (INCLUDES ENTIRE BULK MATERIAL)
10. RMS WFE: ≤ DIFFRACTION LIMITED
11. COATING(S1&S2): BBAR Ravg<0.5% FROM 350-700nm, AOI=0°
12. FOR ASPHERIC COEFFICENTS SEE UNMOUNTED LENS, PART NUMBER 354260-A

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	GG	25/FEB/14
APPROVAL	JAC	05/DEC/23

COPYRIGHT © 2014 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

MOUNTED 0.16 NA ASPHERIC LENS, f=15.3mm, DW=780nm, A COATED

MATERIAL	REV
SEE TABLE	D

ITEM #	APPROX WEIGHT
C260TMD-A	1.31 g