

	PART	MATERIAL
1	355440-A	D-ZLAF52LA
2	LENS MOUNT	303 STAINLESS STEEL



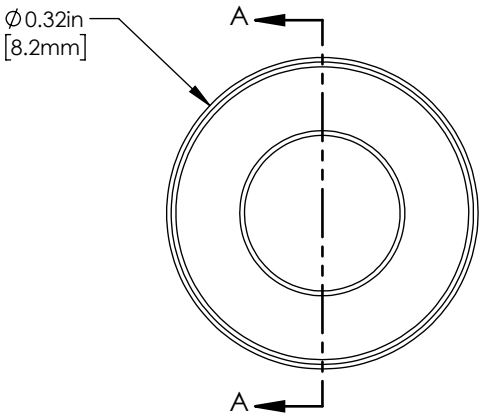

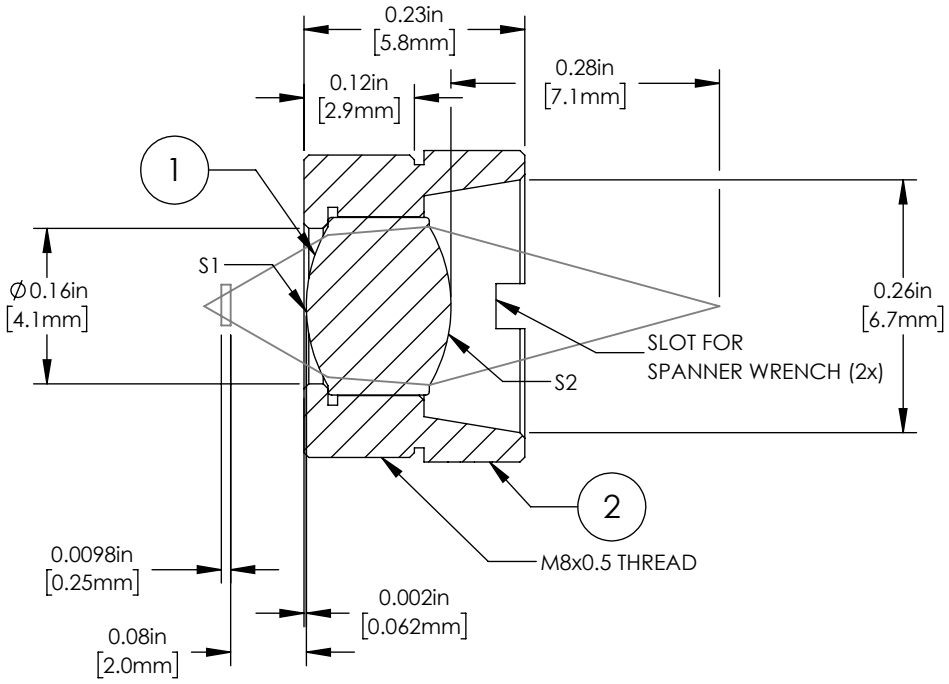

SECTION A-A

NOTES/SPECIFICATIONS:

1. MATERIAL: D-ZLAF52LA
2. REFRACTIVE INDEX: 1.806 @ 587.6nm
3. DESIGN WAVELENGTH: 980 nm
4. CLEAR APERTURE:
   (S1): ∅3.76 mm
   (S2): ∅4.12 mm
5. LASER WINDOW MATERIAL: N-BK7
   WINDOW THICKNESS: 0.25 mm
   REFRACTIVE INDEX: 1.517 @ 587.6nm
6. EFFECTIVE FOCAL LENGTH: 2.8 mm±1.0%
7. NUMERICAL APERTURE: 0.52/0.26
8. CENTER THICKNESS TOLERANCE: ±0.050 mm (LENS)
9. SURFACE QUALITY: 40-20 SCRATCH-DIG (INCLUDES ENTIRE BULK MATERIAL)
10. RMS WFE: ≤ DIFFRACTION LIMITED
11. COATING(S1&S2): BBAR Ravg<0.5% FROM 350-700 nm, AOI: 0°
12. FOR ASPHERIC COEFFICENTS SEE UNMOUNTED LENS, PART NUMBER 355440-A

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	GG	25/FEB/14
APPROVAL	JAC	05/DEC/23

COPYRIGHT © 2014 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

MOUNTED 0.52/0.26 NA ASPHERIC LENS, f=2.8 mm, DW=980 nm, A COATED

MATERIAL	REV
SEE TABLE	B

ITEM #	APPROX WEIGHT
C440TMD-A	1.53 g