


P/N	L (CABLE LENGTH)
CA2606	6" (152mm)
CA2612	12" (304mm)
CA2624	24" (609mm)
CA2648	48" (1219mm)
CA2672	72" (1829mm)

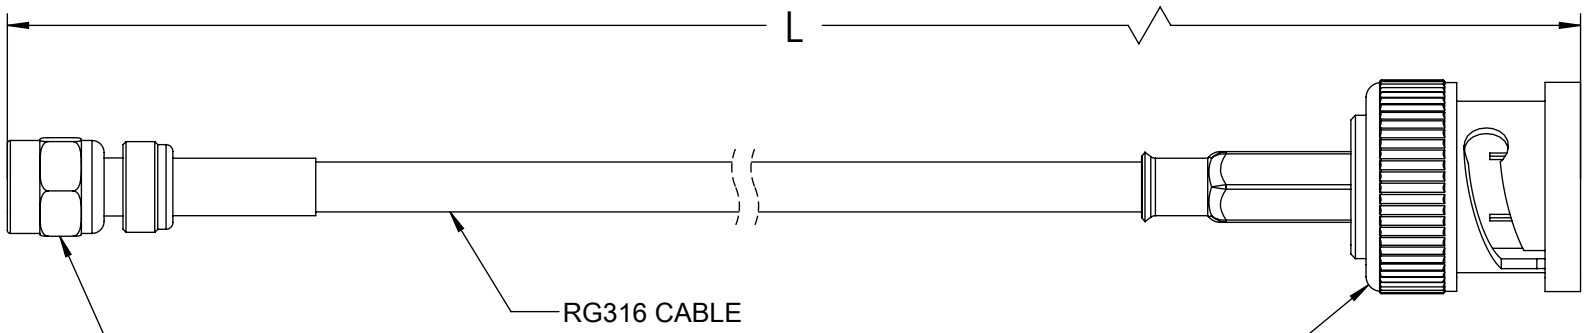



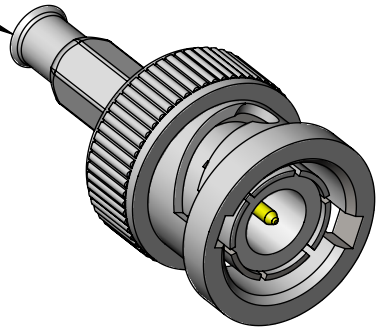

NOTES:

- RG316 Cable
- 50 ohm Impedance
- DC - 4GHz Frequency range
- 750V Dielectric withstanding voltage (RMS)
- 250V Working voltage (RMS)
- Cable length (L) is measured from connectors, end to end
- Add heatshrink fully covering furrules, extending onto wire approx 5mm.

SMA CABLE ASSEMBLIES ARE USED IN APPLICATIONS WHERE HIGH FREQUENCY AND MINIATURIZATION ARE KEY CONSIDERATIONS.

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	WKC	27/SEP/19
APPROVAL	SRK	27/SEP/19

COPYRIGHT © 2018 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

SMC To BNC Cable Assy

MATERIAL	REV
N/A	E

ITEM #	APPROX WEIGHT
SEE TABLE	N/A kg