
P/N	L (CABLE LENGTH)
CA2736	36" (914mm)
CA2760	60" (1524mm)

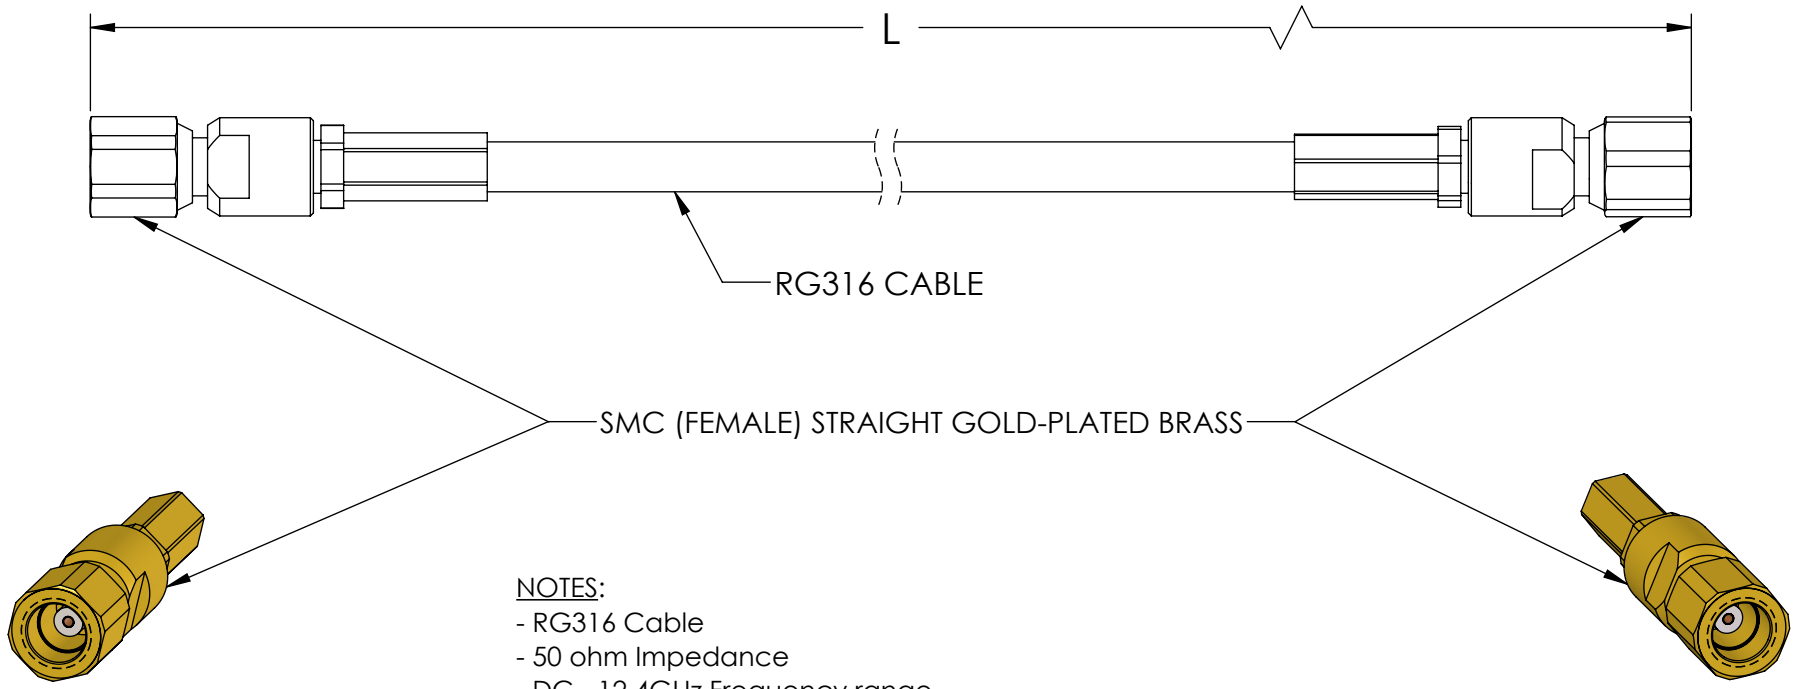

NOTES:
- RG316 Cable
- 50 ohm Impedance
- DC - 12.4GHz Frequency range
- 750V Dielectric withstanding voltage (RMS)
- 250V Working voltage (RMS)
- Cable length (L) is measured from connectors, end to end

SMC CABLE ASSEMBLIES ARE USED IN APPLICATIONS WHERE HIGH FREQUENCY AND MINIATURIZATION ARE KEY CONSIDERATIONS.

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	WKC	26/SEP/19
APPROVAL	SRK	26/SEP/19

COPYRIGHT © 2019 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

SMC Coaxial Cable Assy

MATERIAL	REV
N/A	E

ITEM #	APPROX WEIGHT
SEE TABLE	N/A kg