

SPECIFICATIONS:

PART NUMBER	CABLE LENGTH	
CA2906	6'	152 mm
CA2912	12'	304 mm
CA2924	24'	609 mm
CA2948	48'	1219 mm

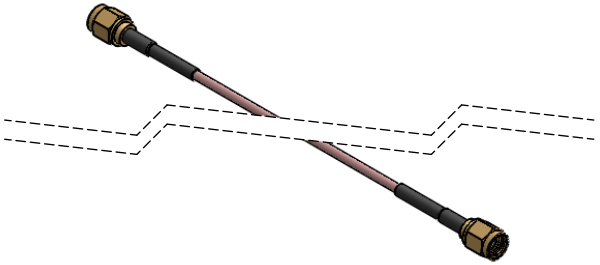

- SMA MALE STRAIGHT TO SMAL STRAIGHT CABLE
- RG-316 CABLE
- 50 OHM IMPEDANCE
- DC TO 3 GHz FREQUENCY RANGE
- 750 V DIELECTRIC WITHSTANDING VOLTAGE (RMS)
- 250 V WORKING VOLTAGE (RMS)

SMA CALBE ASSEMBLIES ARE USED IN APPLICTIONS WHERE HIGH FREQUENCY MINIATURZATION ARE KEY CONSIDERATIONS. THE CABLE LENGTH (L) IS MEASURED TO THE END OF STRAIGHT CONNECTORS.

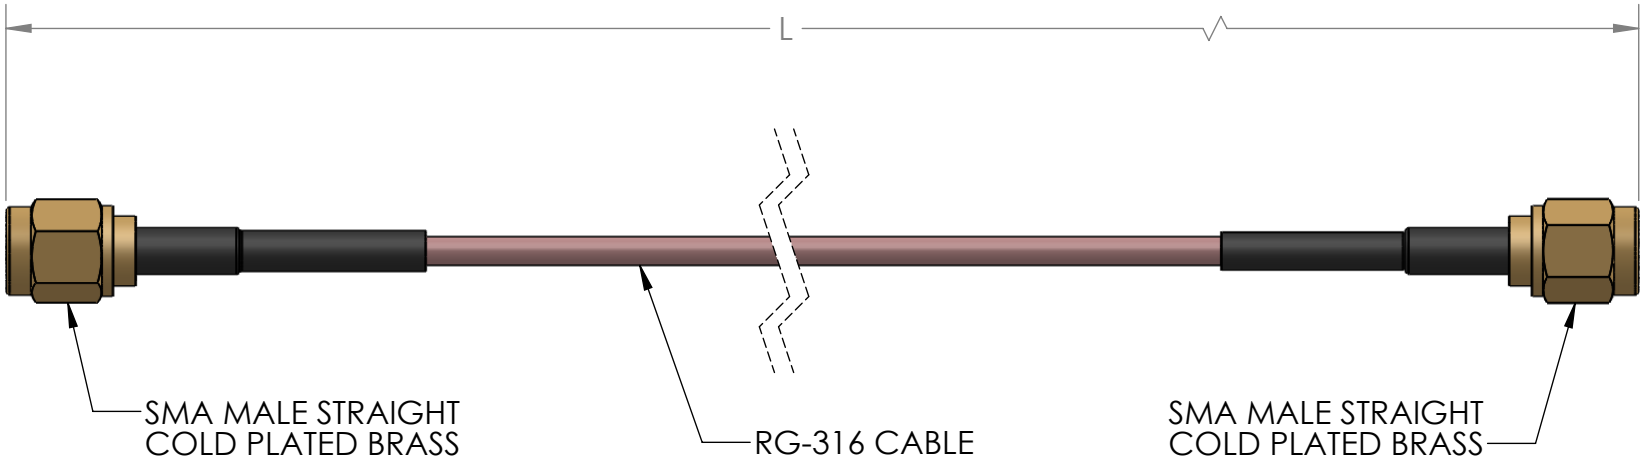

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	JC	10/07/2013
APPROVAL	YJ	10/07/2013

COPYRIGHT © 2013 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

SMA TO SMA MALE STRAIGHT CABLE

MATERIAL	REV
N/A	B

ITEM #	APPROX WEIGHT
CA2906	0.03 kg