
ITEM #	CABLE LENGTH (L)		APPROX WEIGHT (GRAMS)
CA2906	6"	152 mm	10
CA2912	12"	304 mm	15
CA2924	24"	609 mm	25
CA2948	48"	1219 mm	40
CA2972	72"	1829 mm	65



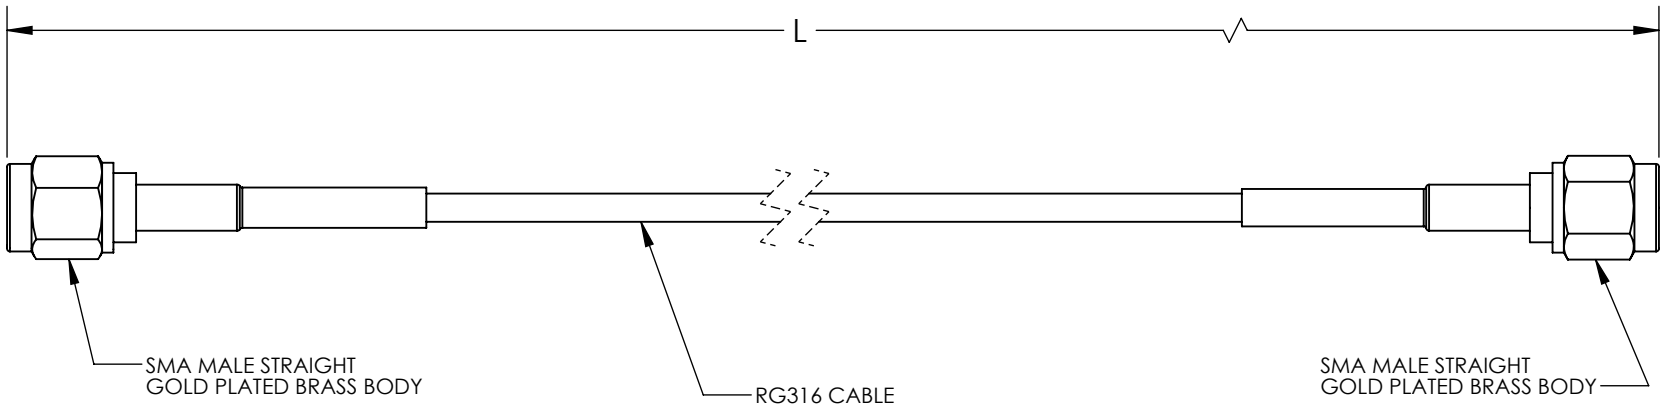

NOTES/SPECIFICATIONS:

- SMA MALE STRAIGHT TO SMA STRAIGHT CABLE
- RG316 CABLE
- OUTER JACKET DIAMETER: 0.102 in [2.59 mm]
- 50 Ω IMPEDANCE
- DC TO 3 GHz FREQUENCY RANGE
- 750 V DIELECTRIC WITHSTANDING VOLTAGE (RMS)
- 250 V WORKING VOLTAGE (RMS)

SMA CABLE ASSEMBLIES ARE USED IN APPLICTIONS WHERE HIGH FREQUENCY MINIATURIZATION ARE KEY CONSIDERATIONS. THE CABLE LENGTH (L) IS MEASURED TO THE END OF STRAIGHT CONNECTORS.

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	JC	10/07/2013
APPROVAL	YJ	10/07/2013

COPYRIGHT © 2013 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS

SMA TO SMA MALE STRAIGHT CABLE

MATERIAL	REV
N/A	C

ITEM #	APPROX WEIGHT
SEE TABLE	SEE TABLE