



| | PART | MATERIAL |
|---|---|---|
| ① | MECHANICAL HOUSING | BLACK ANODIZED ALUMINUM |
| ② | MRA20-F01 | N-BK7 |

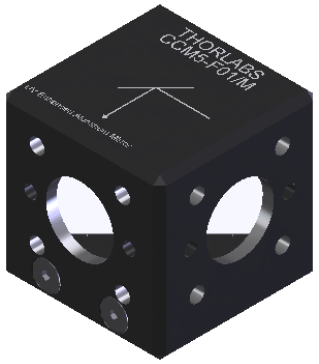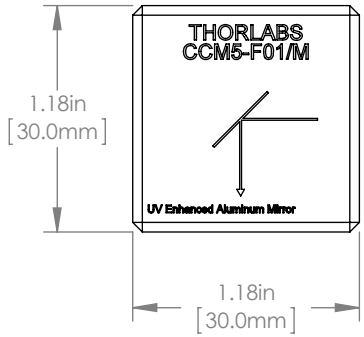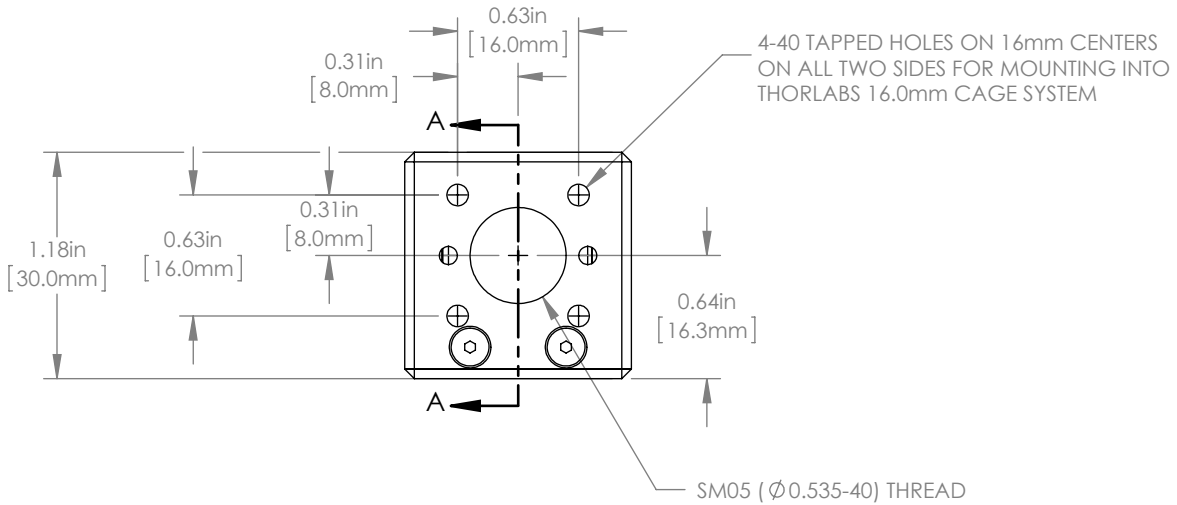

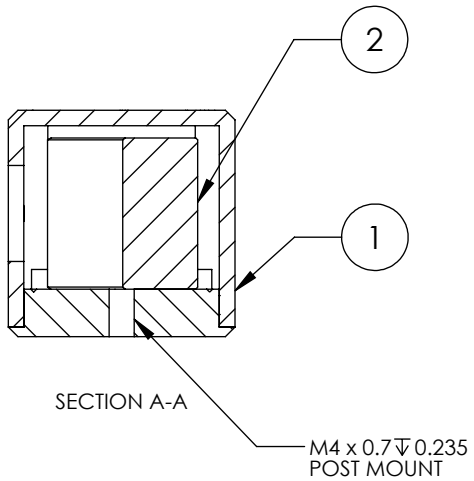


NOTES/SPECIFICATIONS:

1. OPTIC IS ALIGNED FOR REFLECTED BEAMS TO EXIT AT 90°±20 arcmin
2. CLEAR APERTURE: ∅12.5mm

OPTICAL SPECIFICATIONS:

3. SURFACE QUALITY: 40-20 SCRATCH-DIG
4. SURFACE FLATNESS: <λ/10 AT 633nm
5. COATING: UV ENHANCED ALUMINUM, 250-450nm, Ravg: >90%, 0° TO 45° AOI

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

| DRAWING PROJECTION | | |
|---|---|---|
| | NAME | DATE |
| DRAWN | CFS | 16/APR/15 |
| APPROVAL | DD | 28/APR/15 |

COPYRIGHT © 2015 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

16mm CAGE MOUNTED UV ENHANCED ALUMINUM RIGHT ANGLE MIRROR, 250-450nm, M4 TAP

| MATERIAL | REV |
|---|---|
| SEE TABLE | A |

| ITEM # | APPROX WEIGHT |
|---|---|
| CCM5-F01/M | 0.045 kg |