



	PART	MATERIAL
①	MECHANICAL HOUSING	BLACK ANODIZED ALUMINUM
②	MRA20-G01	N-BK7

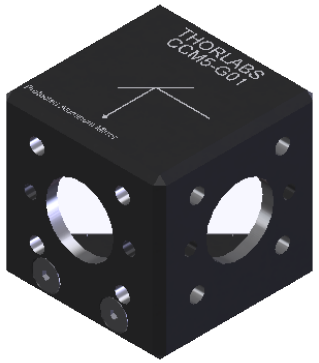

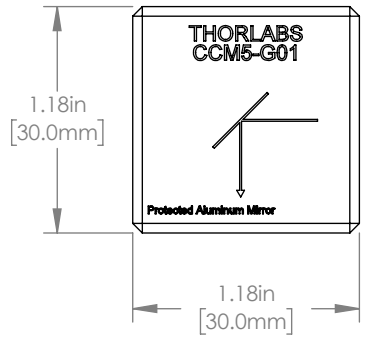

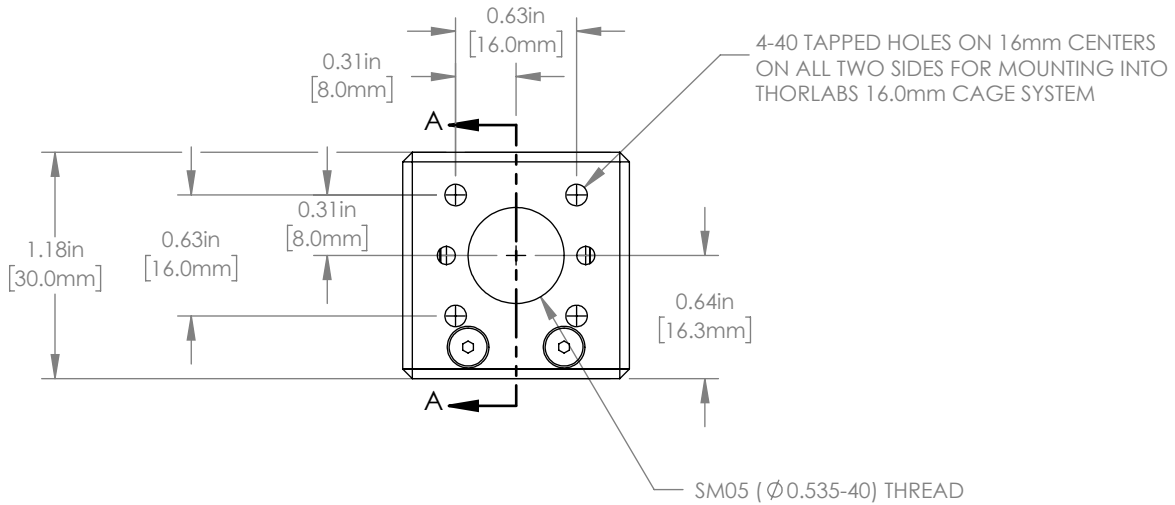

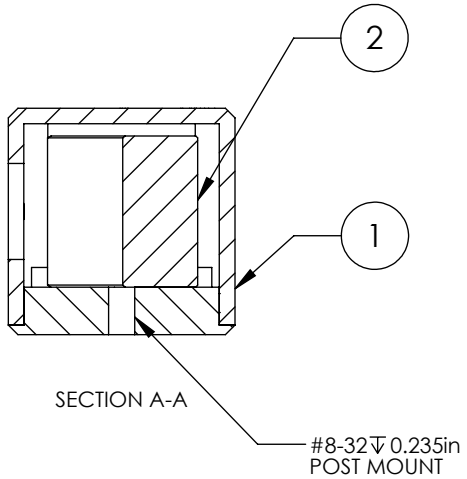

NOTES/SPECIFICATIONS:

1. OPTIC IS ALIGNED FOR REFLECTED BEAMS TO EXIT AT 90°±20 arcmin
2. CLEAR APERTURE: ∅12.5mm

OPTICAL SPECIFICATIONS:

3. SURFACE QUALITY: 40-20 SCRATCH-DIG
4. SURFACE FLATNESS: <λ/10 AT 633nm
5. COATING: PROTECTED ALUMINUM
   450nm-2.0µm, Ravg: >90%, 0° TO 45° AOI
   2.0µm-20.0µm, Ravg: >95%, 0° TO 45° AOI

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	CFS	05/NOV/15
APPROVAL	DD	12/JAN/16

COPYRIGHT © 2016 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

16mm CAGE MOUNTED PROTECTED ALUMINUM RIGHT ANGLE MIRROR, 450nm-20.0µm, #8-32 TAP

MATERIAL	REV
SEE TABLE	A

ITEM #	APPROX WEIGHT
CCM5-G01	0.045 kg