



	PART	MATERIAL
①	MECHANICAL HOUSING	BLACK ANODIZED ALUMINUM
②	MRA20-P01	N-BK7

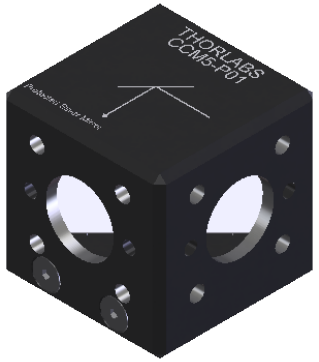

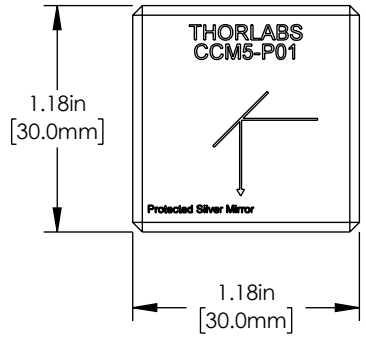

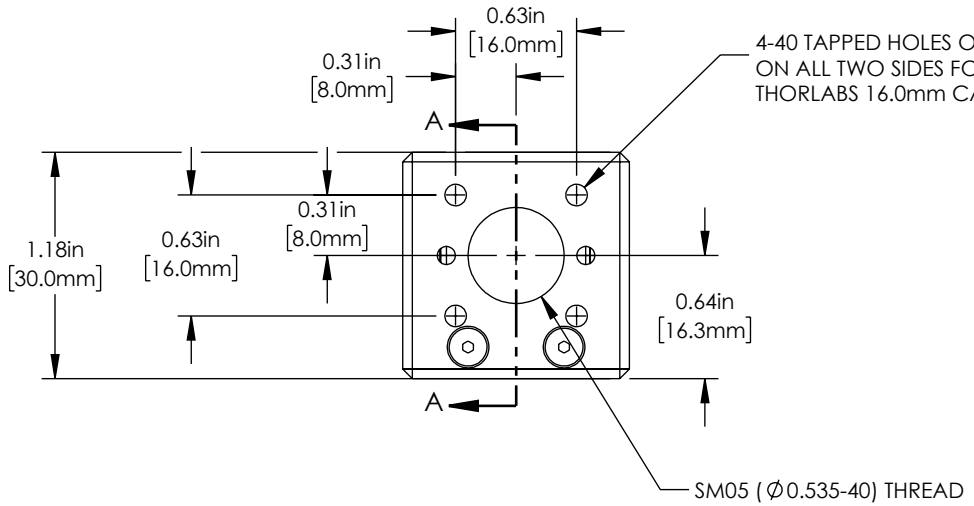

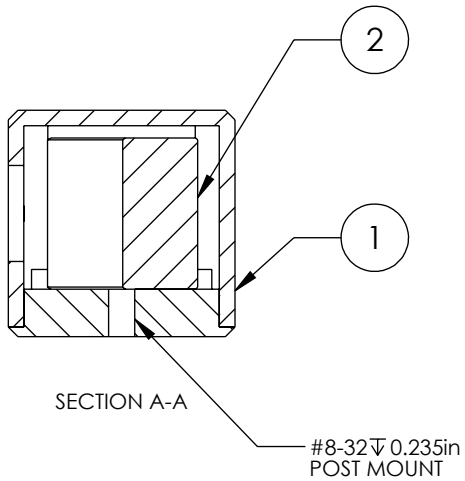

NOTES/SPECIFICATIONS:

1. OPTIC IS ALIGNED FOR REFLECTED BEAMS TO EXIT AT 90° ±20 arcmin
2. CLEAR APERTURE: ∅12.5 mm

OPTICAL SPECIFICATIONS:

3. SURFACE QUALITY: 40-20 SCRATCH-DIG
4. SURFACE FLATNESS: <λ/10 AT 633 nm
5. COATING: PROTECTED SILVER
   450 nm-2.0 µm, Ravg: >97%, 0° TO 45° AOI
   2.0 µm-20.0 µm, Ravg: >95%, 0° TO 45° AOI

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	CFS	05/NOV/15
APPROVAL	BAG	18/NOV/22

COPYRIGHT © 2022 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

16 mm CAGE MOUNTED PROTECTED SILVER RIGHT ANGLE MIRROR, 450 nm-20.0 µm, #8-32 TAP

MATERIAL	REV
SEE TABLE	B

ITEM #	APPROX WEIGHT
CCM5-P01	0.045 kg