
1310 nm, 20 mW (Min) DFB Butterfly Laser with Isolator, PM Fiber

DFB1310P



Description

Thorlabs' DFB1310P Distributed Feedback (DFB) laser is a single-frequency laser diode that is well-suited as a low-noise pump source for near infrared spectroscopy (NIRS), telecommunication, and general sensing. The DFB1310P laser includes an integrated optical isolator, thermoelectric cooler (TEC), thermistor, and monitor photodiode. It is packaged in a 14-pin butterfly package with PM1310 polarization-maintaining optical fiber and an FC/APC connector with the connector key aligned to the slow axis of the fiber.

Specifications

DFB1310P[a]				
	Symbol	**Min**	**Typical**	**Max**
Center Wavelength	λ_C	1307 nm	1310 nm	1313 nm
Laser Linewidth	Δv	-	2 MHz	-
Output Power CW @ I_{OP}	P_{OP}	20 mW	-	-
Forward Voltage	V_F	-	-	3.0 V
Operating Current	I_{OP}	-	-	100 mA
Mode-Hop-Free Operating Current[b]	$\Delta I_{Mode\text{-}Hop\text{-}Free}$	20 mA	-	-
SMSR in Mode-Hop-Free Range[c]	SMSR	30 dB	50 dB	-
Threshold Current	I_{TH}	-	8 mA	-
Slope Efficiency	$\Delta P/\Delta I$	-	0.33 W/A	-
Current Tuning	$\Delta\lambda/\Delta I$	-	0.02 nm/mA	-
Temperature Tuning	$\Delta\lambda/\Delta T$	-	0.1 nm/°C	-
Monitor Diode Responsivity	I_{MON}/P	-	1.5 µA/mW	-
Polarization Extinction Ratio[d]	r_{ex}	-	24 dB	-
Internal Isolation	ISO	40 dB	-	-
TEC Operation (Typical / Max @ T_{CASE} = 25°C / 75°C)				
TEC Current	I_{TEC}	-	0.06 A	2.0 A
TEC Voltage	V_{TEC}	-	0.20 V	4.0 V
Thermistor Resistance @ 25 °C	R_{TH}	-	10 kΩ	-


a. T_{CASE} = 25 °C; T_{CHIP} = 15 - 35 °C.
b. The current range where mode-hops are not observed, allowing for continuous tuning.
c. As measured with an optical spectrum analyzer (OSA) with spectral resolution of 0.02 nm to empirically determine single frequency range. Laser 30 dB bandwidth and SMSR are subject to monochromator settings and OSA internal algorithms and will differ from instrument to instrument.
d. Ratio of transmitted light polarized along the fiber's slow axis to transmitted light polarized along the fast axis.

Absolute Maximum Ratings	
Laser Current[a]	See Serialized Datasheet
Laser Power[a]	See Serialized Datasheet
LD Reverse Voltage	2 V
TEC Current	2.6 A
TEC Voltage	4.7 V
PD Reverse Voltage	5 V
Operating Case Temperature	-5 to 75 °C
Operating Chip Temperature	15 to 35 °C
Storage Temperature	-40 to 85 °C


a. Some devices will produce the max laser power before reaching the max operating current. Do not drive the laser diode beyond the absolute max laser current or power. Operating in this regime can cause damage to the device.

Fiber Specifications	
Fiber Type	PM1310
Numerical Aperture	0.13
Core Diameter	9 µm
Mode Field Diameter	9.0 ± 0.5 µm at 1310 nm
Fiber Length	1.0 m ± 0.1 m
Connector	FC/APC, 2.0 mm Narrow Key
Connector Key Alignment	Slow Axis
Jacket	Ø900 µm, Loose Tube


Typical Performance Plots

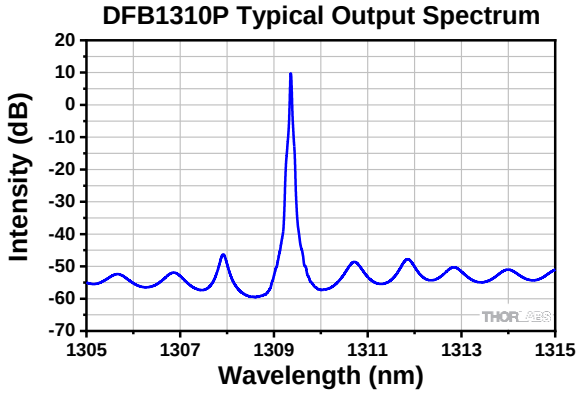


The spectrum was measured using an optical spectrum analyzer with a spectral resolution of 0.02 nm.

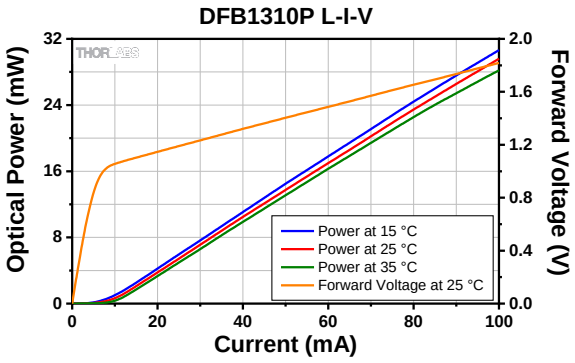


DFB1310P Temperature and Current Tuning

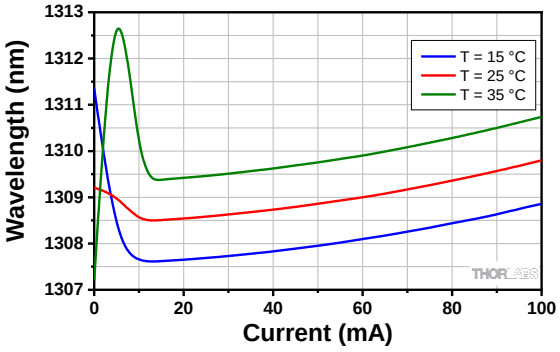

DFB1310P Side Mode Suppression Ratio

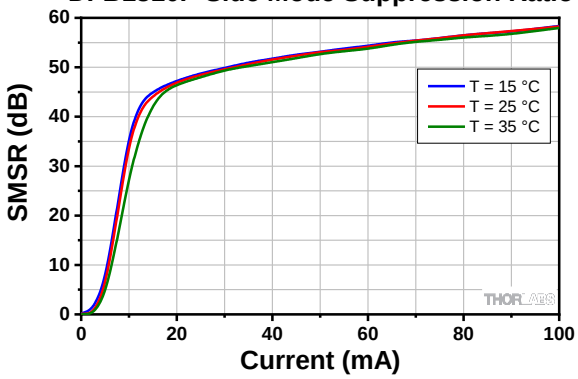

Drawings

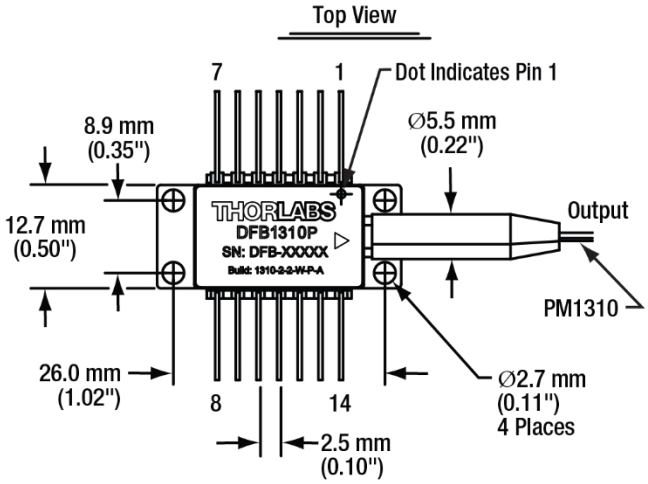

PIN IDENTIFICATION

1.	TEC +	14.	TEC -
2.	Thermistor	13.	Case
3.	PD Anode	12.	NC
4.	PD Cathode	11.	LD Cathode
5.	Thermistor	10.	LD Anode
6.	NC	9.	NC
7.	NC	8.	NC

