


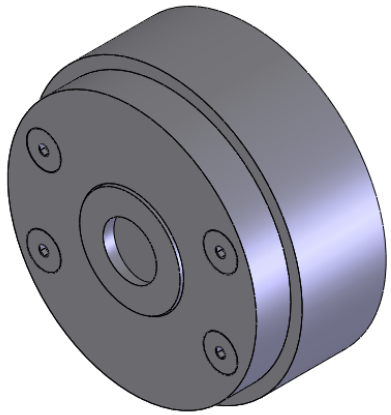


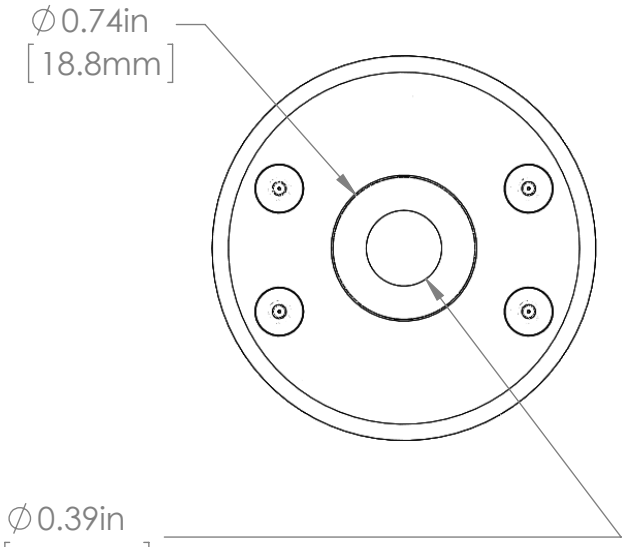

MECHANICAL APERTURE
4.4mm x 4.4mm ACTIVE MIRROR AREA
±18° ACCEPTANCE ANGLE.
AR COATED WEDGED
PROTECTIVE WINDOW.

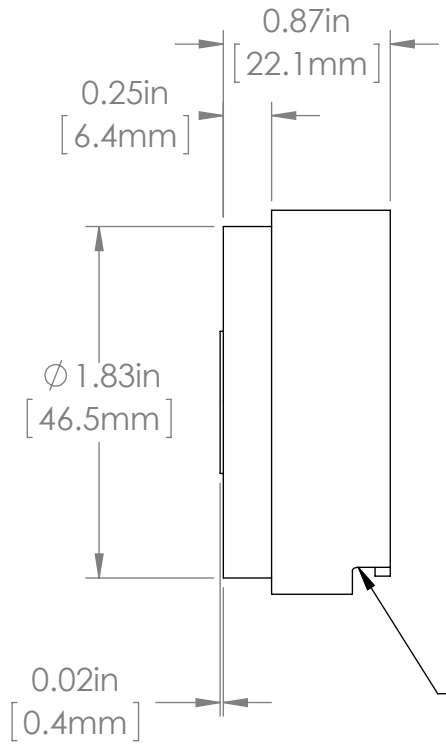

FOUR 37-CHANNEL CABLES
EXIT HEAD FROM SLOT.
LENGTH = 2 m.
TERMINATED WITH
IDC40 CONNECTORS.

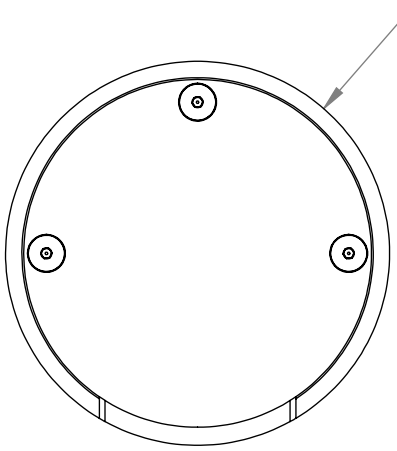

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	JJT	7/Nov/14
APPROVAL	SB	7/Nov/14

COPYRIGHT © 2014 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

Au Coated Multi-Deformable Mirror

MATERIAL	REV
Black Anodized Aluminum Housing	A

ITEM #	APPROX WEIGHT
DM140A-35-UM01	4.54 kg