
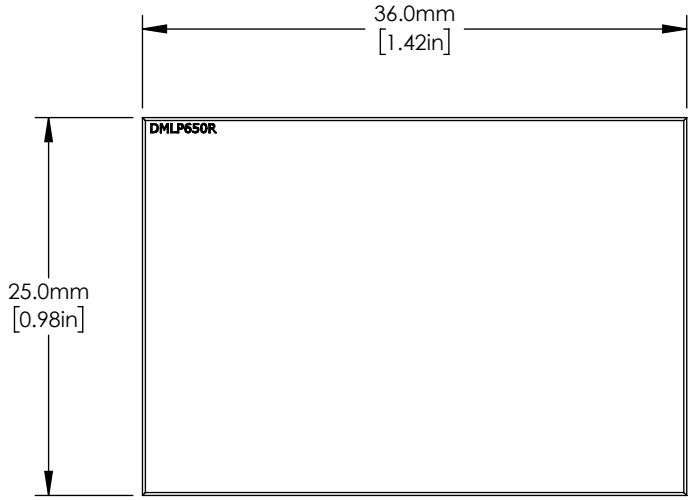


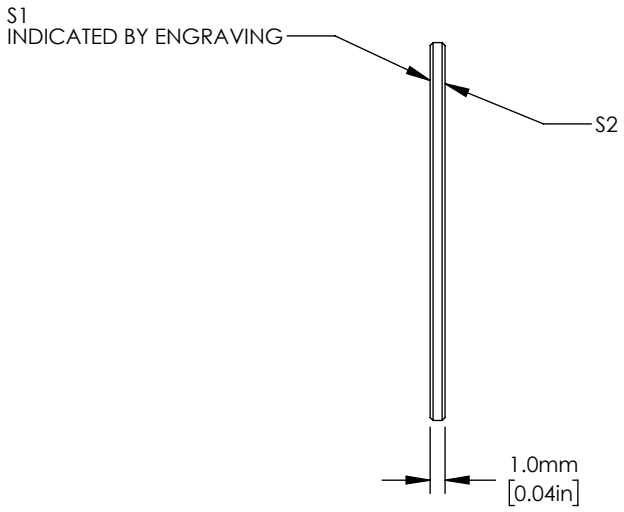


NOTES/SPECIFICATIONS:

1. CLEAR APERTURE: ≥22.5 x 32.4 mm
2. SURFACE QUALITY(S1,S2): 40-20 SCRATCH-DIG
3. TRANSMITTED WAVEFRONT ERROR: <λ/4 AT 633 nm
4. PARALLELISM: <3 arcmin
5. DIMENSIONAL TOLERANCE: ±0.1 mm
6. FILTER COATING (S1):
   REFLECTION BAND (R): >95% AVERAGE, >90% ABSOLUTE 400-633 nm
   TRANSMISSION BAND (T): >90% AVERAGE, >85% ABSOLUTE 685-1600 nm
   AOI: 45°
7. AR COATING (S2):
   R: <2% ABSOLUTE 685-1600 nm
   AOI: 45°

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

| DRAWING PROJECTION | | |
|---|---|---|
| | NAME | DATE |
| DRAWN | MG | 03/JUNE/14 |
| APPROVAL | PH | 10/MAY/24 |

COPYRIGHT © 2014 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

25x36 mm LONGPASS
DICHROIC MIRROR 650 nm

| MATERIAL | REV |
|---|---|
| UV FUSED SILICA | B |

| ITEM # | APPROX WEIGHT |
|---|---|
| DMLP650R | 2 g |