
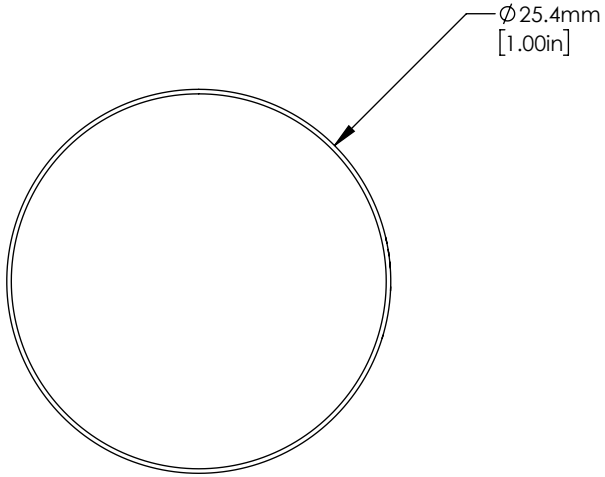


ISOMETRIC VIEW
SCALE 1:1

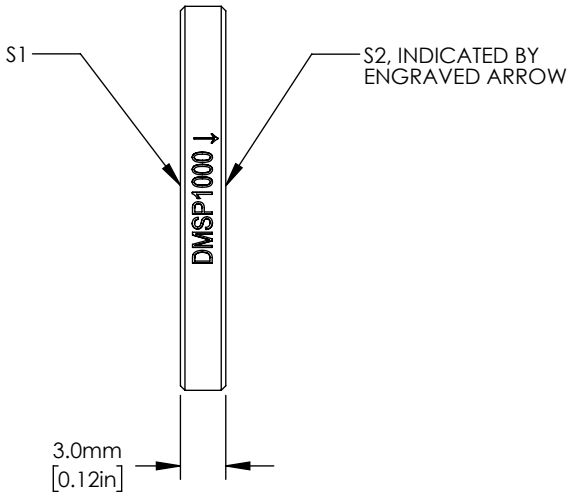


NOTES/SPECIFICATIONS:

1. CLEAR APERTURE: ≥Ø22.9 mm
2. SURFACE QUALITY (S1, S2): 40-20 SCRATCH-DIG
3. TRANSMITTED WAVEFRONT ERROR: <λ/4 AT 633 nm
4. PARALLELISM: <3 arcmin
5. DIAMETER TOLERANCE: +0.0/-0.2 mm
6. THICKNESS TOLERANCE: ±0.2 mm
7. FILTER COATING (S1):
   REFLECTION BAND (R): >95% AVERAGE, >90% ABSOLUTE 1020-1550 nm
   TRANSMISSION BAND (T): >90% AVERAGE, >85% ABSOLUTE 520-985 nm
   AOI: 45°
8. AR COATING (S2):
   R: <2% ABSOLUTE 520-985 nm
   AOI: 45°

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

| DRAWING PROJECTION | | |
|---|---|---|
| | NAME | DATE |
| DRAWN | TW | 17/OCT/11 |
| APPROVAL | ES | 23/JUL/25 |

COPYRIGHT © 2011 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

Ø25.4 mm DICHROIC MIRROR, SHORTPASS, 1000 nm

| MATERIAL | REV |
|---|---|
| UV FUSED SILICA | G |

| ITEM # | APPROX WEIGHT |
|---|---|
| DMSP1000 | 3 g |