

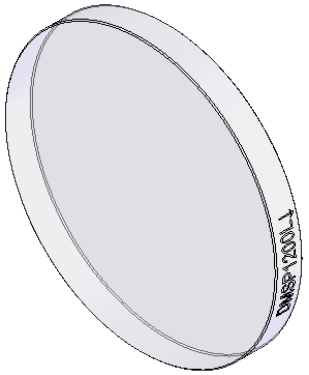


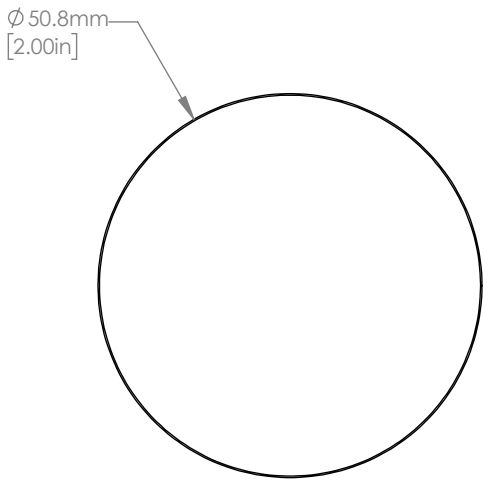

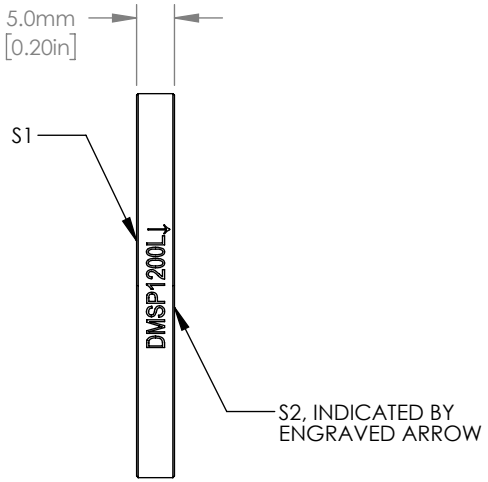

NOTES/SPECIFICATIONS:

1. CLEAR APERTURE: ≥Ø45.7 mm
2. SURFACE QUALITY (S1, S2): 40-20 SCRATCH-DIG
3. TRANSMITTED WAVEFRONT ERROR: <λ/4 AT 633 nm
4. PARALLELISM: <3 arcmin
5. DIAMETER TOLERANCE: +0.0/-0.2 mm
6. THICKNESS TOLERANCE: ±0.1 mm
7. FILTER COATING (S1):
   - REFLECTION BAND (R): >99% AVERAGE Rs AND Rp 1250-1400 nm
   - TRANSMISSION BAND (T): >93% AVERAGE Ts, >95% AVERAGE Tp 1000-1175 nm
   - AOI: 45°
8. AR COATING (S2):
   - R: <2% ABSOLUTE 1000-1175 nm
   - AOI: 45°

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	MG	03/APR/17
APPROVAL	PH	28/MAY/24

COPYRIGHT © 2017 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

Ø50.8 mm SHORTPASS DICHROIC MIRROR 1200 nm

MATERIAL	REV
UV FUSED SILICA	B

ITEM #	APPROX WEIGHT
DMSP1200L	20 g