



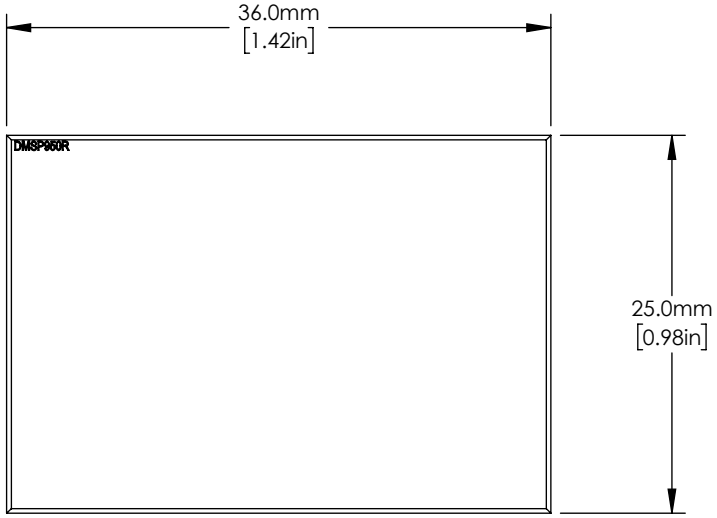

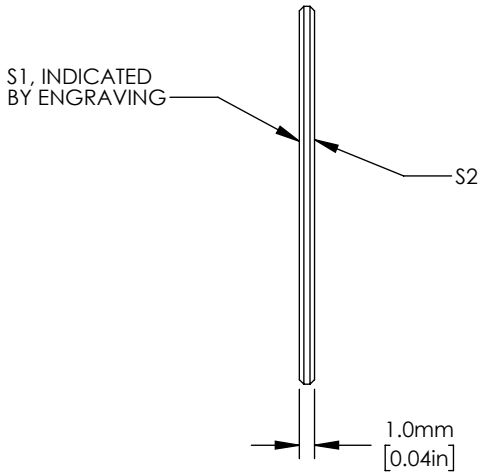

NOTES/SPECIFICATIONS:

1. CLEAR APERTURE: ≥22.5 x 32.4 mm
2. SUFRACE QUALITY (S1, S2): 40-20 SCRATCH-DIG
3. TRANSMITTED WAVEFRONT ERROR: <λ/4 AT 633 nm OVER CLEAR APERTURE
4. PARALLELISM: <3 arcmin
5. DIMENSIONAL TOLERANCE: ±0.1 mm
6. FILTER COATING (S1):
   REFLECTION BAND (R): > 95% AVERAGE, > 90% ABSOLUTE 990-1600 nm
   TRANSMISSION BAND (T): > 90% AVERAGE, > 85% ABSOLUTE 420-900 nm
   AOI: 45°
7. AR COATING (S2):
   BBAR 420-900 nm, Ravg < 2%
   AOI: 45°

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	MG	13/AUG/15
APPROVAL	PH	10/MAY/24

COPYRIGHT © 2015 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

25x36 mm DICHROIC MIRROR, SHORTPASS 950 nm

MATERIAL	REV
UV FUSED SILICA	B

ITEM #	APPROX WEIGHT
DMSP950R	2 g