1 MHz High-Pass Filter



EF517

Description

The EF517 High-Pass Filter employs a 6th order elliptic filter design. The design delivers excellent low-band rejection (>60 dB typ) with reduced group delay variation for passband transparency above 1 MHz. Uniquely, the EF517 is designed to terminate into DAQ systems, lab equipment, oscilloscopes, or any modern voltage signal transfer systems that have high impedance inputs. For $V_{transfer}$ systems, this architecture provides the highest signal-to-noise ratio capabilities.

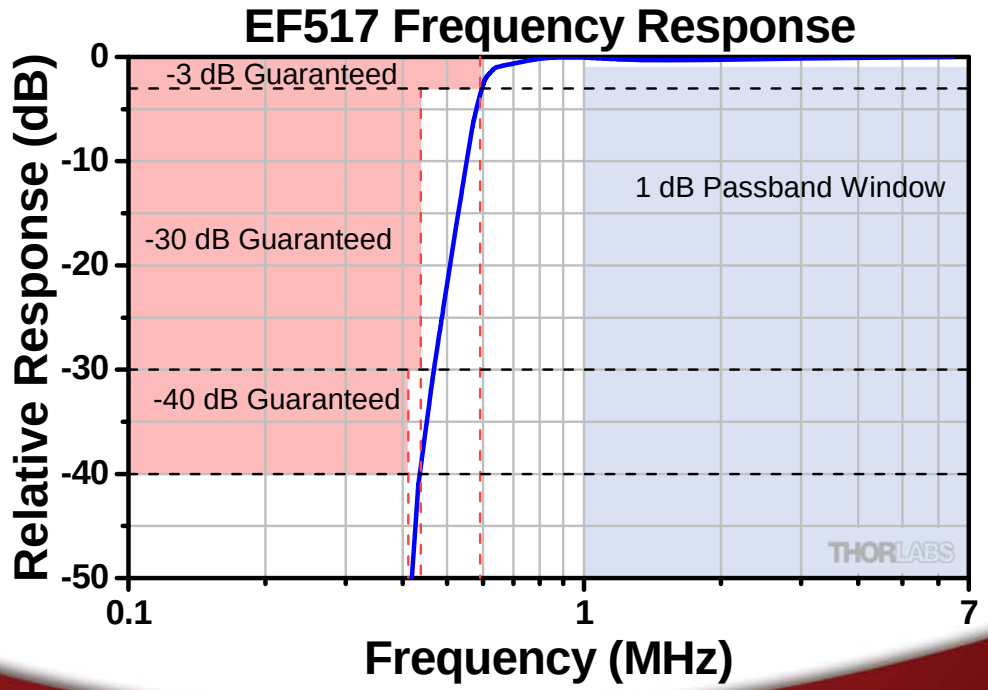
Specifications

EF517	
	Value[a]
Passband (1 dB Window)[b]	> 1 MHz
3 dB Rejection	< 592 kHz
30 dB Rejection	< 438 kHz
40 dB Rejection	< 411 kHz
Source Impedance (BNC Female)	50 Ω (Typical)
Load Impedance[c] (BNC Male)	≥100 kΩ (Typical)
Input Voltage	±10 V (Max)
Storage Temperature	-20 to +70 °C

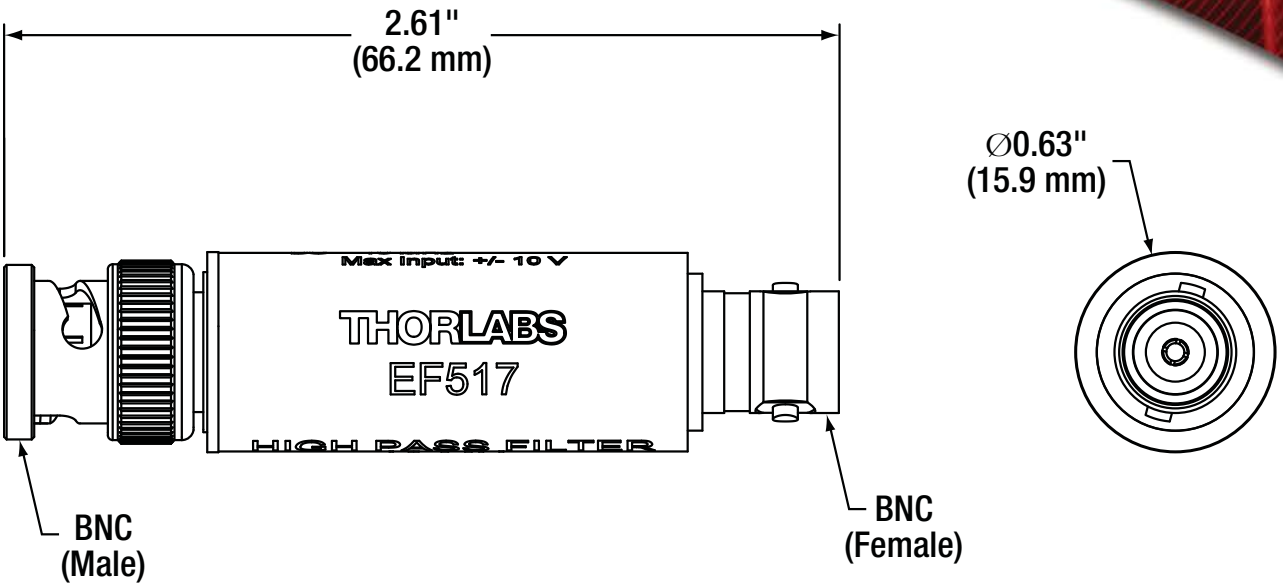
a. Values measured at 25 °C.
b. Performance measured to 500 MHz.
c. This filter can be operated with termination resistances below 1 kΩ, however, the passband will narrow at smaller termination resistances and the performance is not guaranteed.

Sample Response Data

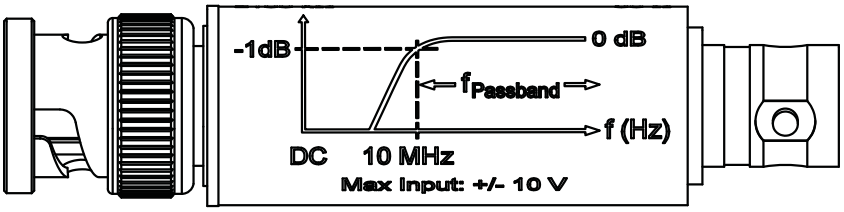
Frequency (MHz)	Rel. Resp. (dB)	Frequency (MHz)	Rel. Resp. (dB)	Group Delay Variation (nS)
0.20	-57.17	0.53	-15.79	1630.1
0.21	-57.48	0.57	-6.77	2963.3
0.23	-58.77	0.57	-5.89	3156.9
0.26	-61.74	0.59	-3.30	3749.9
0.29	-80.70	0.60	-2.75	3755.5
0.29	-82.75	0.60	-2.28	3710.1
0.29	-78.15	0.61	-1.91	3593.8
0.31	-65.50	0.64	-1.04	2603.7
0.34	-57.71	0.64	-0.98	2420.6
0.38	-67.91	0.65	-0.93	2261.6
0.39	-72.50	0.73	-0.50	1294.4
0.43	-42.04	0.78	-0.24	1064.4
0.43	-40.79	0.82	-0.09	910.4
0.44	-39.58	0.90	0.00	687.9
0.46	-32.16	0.99	-0.05	531.7
0.47	-30.94	1.02	-0.05	433.5
0.47	-29.74	1.14	-0.18	337.1
		1.41	-0.33	194.2
		2.04	-0.28	82.4
		2.72	-0.17	42.3
		3.63	-0.08	19.9
		5.86	-0.01	1.7
		6.44	-0.01	0.0



Drawings


2.61"
(66.2 mm)
Ø0.63"
(15.9 mm)
Max Input: +/- 10 V
THORLABS
EF517
HIGH PASS FILTER
BNC
(Male)
BNC
(Female)


HIGH PASS FILTER
1 MHz
OUTPUT
≥100 kΩ
INPUT
50 Ω


-1dB
0 dB
f Passband
f (Hz)
DC
10 MHz
Max Input: +/- 10 V