


	PART DESCRIPTION	MATERIAL
①	ADHESIVE RING	PLASTIC
②	BANDPASS FILTER	UVFS
③	ENGRAVED HOUSING	ANODIZED ALUMINUM



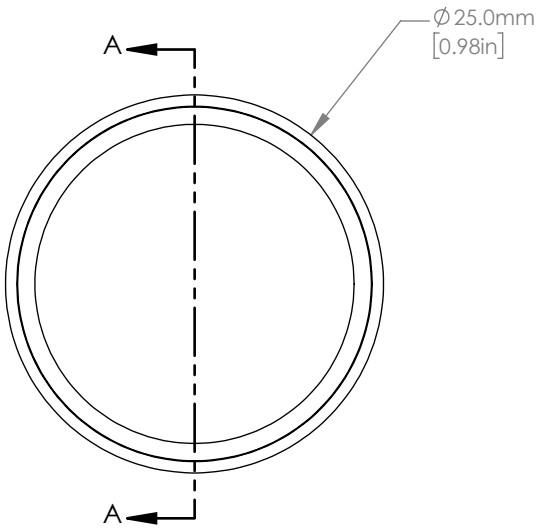

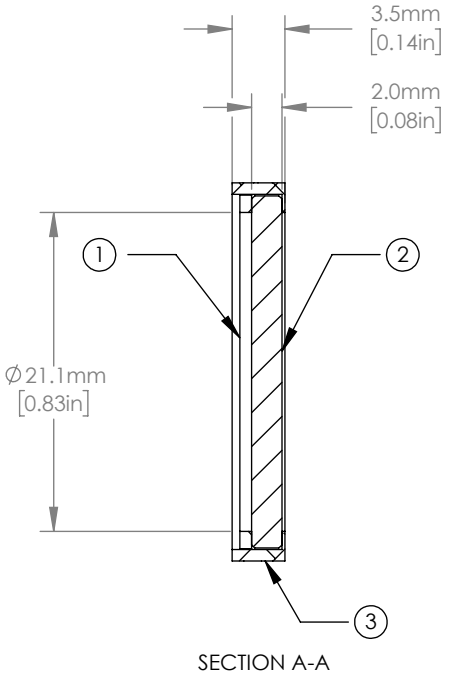

SECTION A-A

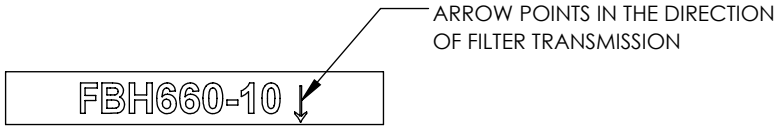

NOTES/SPECIFICATIONS:

1. CLEAR APERTURE: Ø21.1 mm
2. TRANSMITTED WAVEFRONT ERROR: λ/2 AT 632.8 nm OVER CLEAR APERTURE
3. SURFACE QUALITY: 60-40 SCRATCH-DIG
4. COATING: BANDPASS FILTER, HARDCOATED
   - TRANSMISSION: >90% AT 660 nm
   - FWHM: 10 nm
   - BLOCKING: >OD5 200 nm-648 nm, AND 672-1200 nm
   - 0° AOI

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	JAC	27/MAY/21
APPROVAL	DD	27/MAY/21

COPYRIGHT © 2021 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

PREMIUM BANDPASS FILTER, Ø25 mm, CWL: 660 nm, FWHM: 10 nm

MATERIAL	REV
SEE TABLE	B

ITEM #	APPROX WEIGHT
FBH660-10	3 g