
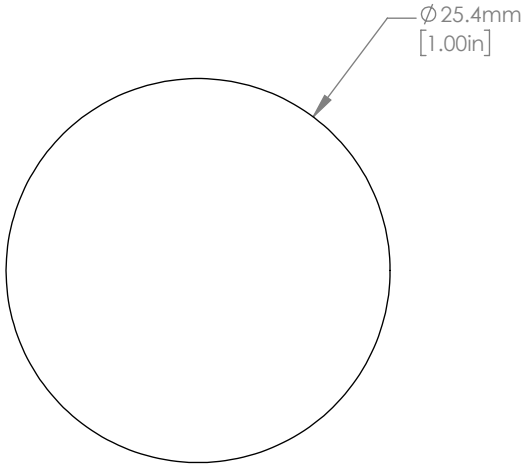


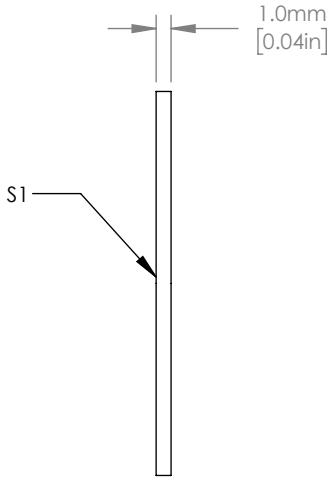

NOTES/SPECIFICATIONS:

1. CLEAR APERTURE: > ∅22.8 mm
2. TRANSMITTED WAVEFRONT ERROR: <λ/2 OVER CLEAR APERTURE
3. SURFACE QUALITY: 60-40 SCRATCH-DIG
4. PARALLELISM: <3 arcmin
5. DIAMETER TOLERANCE: +0.00/-0.20 mm
6. THICKNESS TOLERANCE: ±0.10 mm
7. COATING (S1): TRANSMISSION: >85% AVG 450-645 nm
   REFLECTION: >90% AVG 750-1200 nm
   CUT-ON TOLERANCE: 720 nm ± 25 nm
   AOI: 0°

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	JAC	09/OCT/20
APPROVAL	DD	09/OCT/20

COPYRIGHT © 2020 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

∅25.4 mm NEAR-IR HOT MIRROR, AOI: 0°

MATERIAL	REV
SODA LIME	E

ITEM #	APPROX WEIGHT
FM01	1 g