



ISOMETRIC VIEW
SCALE 1:1

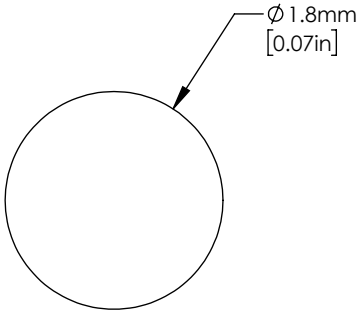

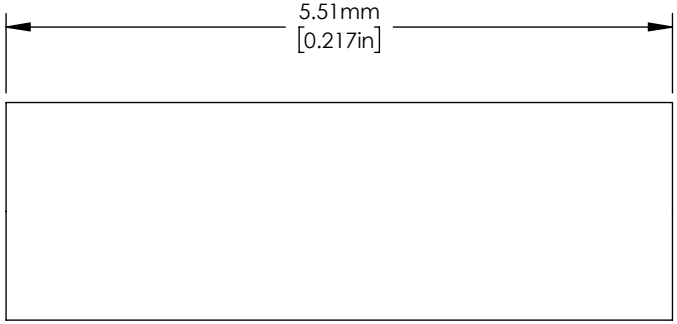

NOTES/SPECIFICATIONS:

1. CLEAR APERTURE > 60% DIAMETER
2. DESIGN WAVELENGTH: 1060 nm
3. EFFECTIVE FOCAL LENGTH: 1.97 mm
4. LENS OUTER DIAMETER TOLERANCE: +0.005/-0.01 mm
5. PITCH: 0.29
6. INDEX (n_0): 1.594
7. ON AXIS NA (HALF ANGLE): 0.23
8. $\sqrt{A}(mm^{-1})$: 0.329
9. TRANSMITTANCE: >97%, 1060 ± 30 nm
10. WORKING DISTANCE (AT DESIGN WAVELENGTH): 1.471 mm
11. POLARIZATION PRESERVATION: 0.99%
12. OPERATING TEMPERATURE: 200°C x1000hrs
13. COATING (BOTH FACES): VAR Ravg ≤ 0.25% AT 1060 nm
    0° AOI

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	LM	05/APR/24
APPROVAL	ES	23/APR/24

COPYRIGHT © 2024 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

GRIN LENS 0.29 PITCH, 1060 nm

MATERIAL	REV
OXIDE GLASS	A

ITEM #	APPROX WEIGHT
GRIN2910C	0.03 kg