



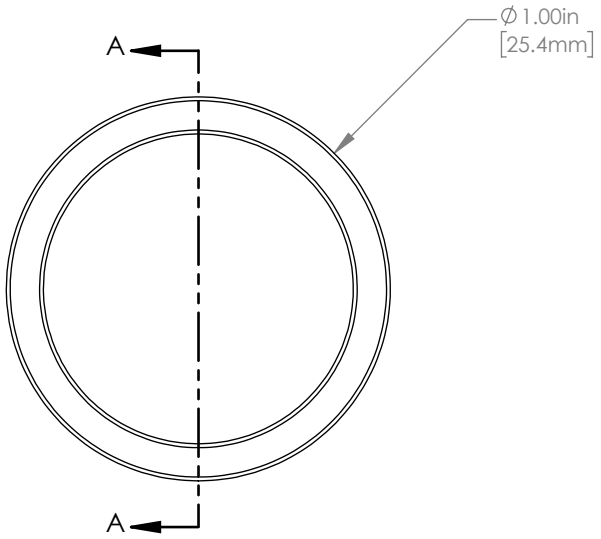

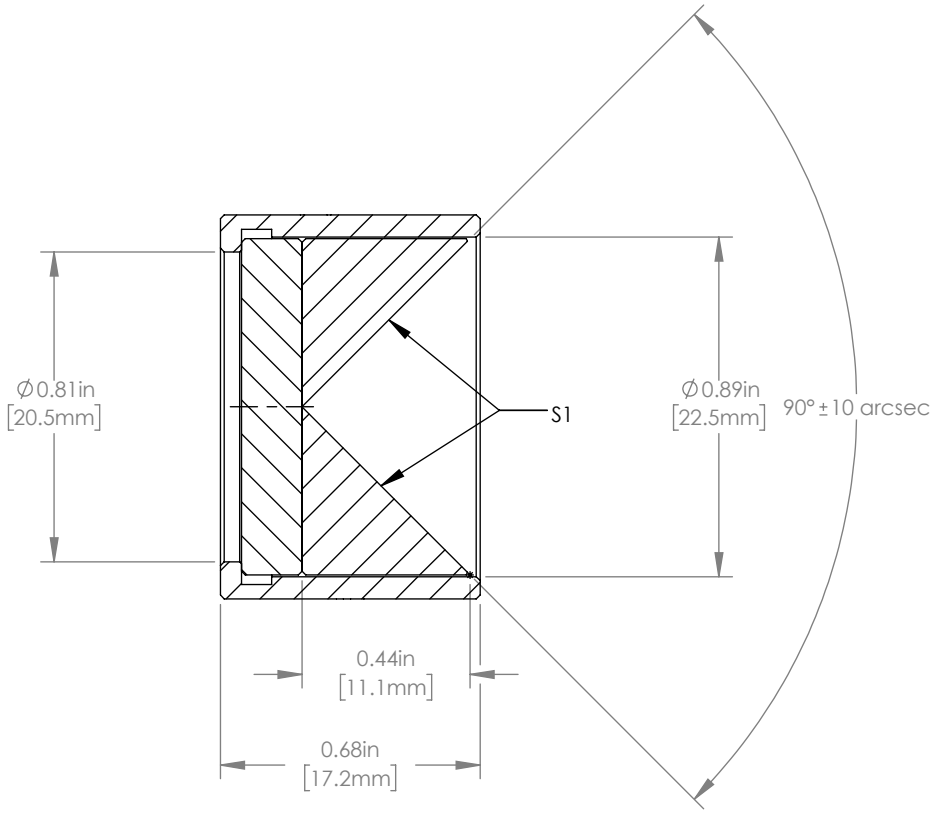

NOTES/SPECIFICATIONS:

1. CLEAR APERTURE: > ∅18.0 mm
2. SURFACE QUALITY(S1): 40-20 SCRATCH-DIG
3. REFLECTED WAVEFRONT ERROR: <0.5 WAVES AT 633 nm
4. SURFACE FLATNESS (S1): <λ/4 AT 633 nm
5. COATING (S1): PROTECTED ALUMINUM
   Ravg: >90% FROM 450 nm - 2 µm
   Ravg: >95% FROM 2 µm - 20 µm
   AOI: 0° TO 45°

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	GG	03/MAR/17
APPROVAL	DD	03/MAR/17

COPYRIGHT © 2017 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

∅1" HOLLOW ROOF MIRROR PROTECTED ALUMINUM

MATERIAL	REV
ALUMINUM/FUSED SILICA	A

ITEM #	APPROX WEIGHT
HR1015-G01	13 g