



	PART	MATERIAL
1	ENGRAVED SM05P05	ANODIZED ALUMINUM
2	NYLON-TIPPED LOCKING SCREW WITH LOCTITE 242, 5/64in HEX	STAINLESS STEEL
3	1" HOLLOW RETROREFLECTOR MIRROR PROTECTED SILVER	FUSED SILICA



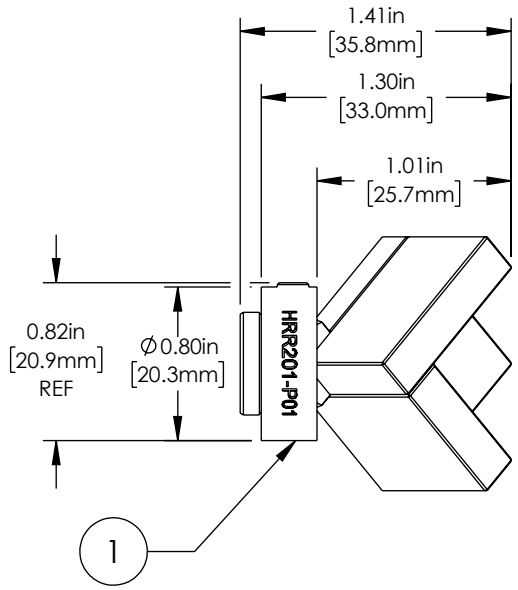

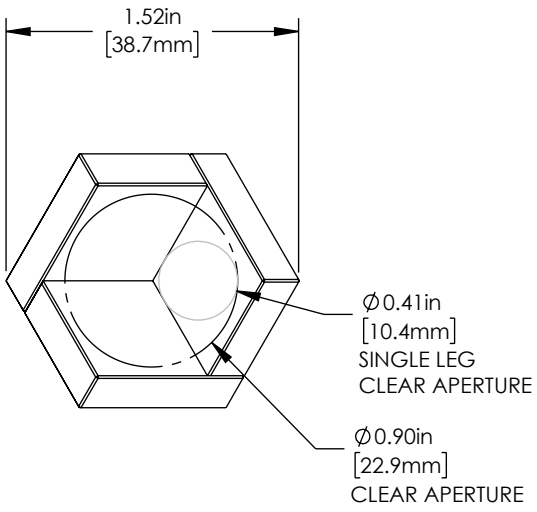

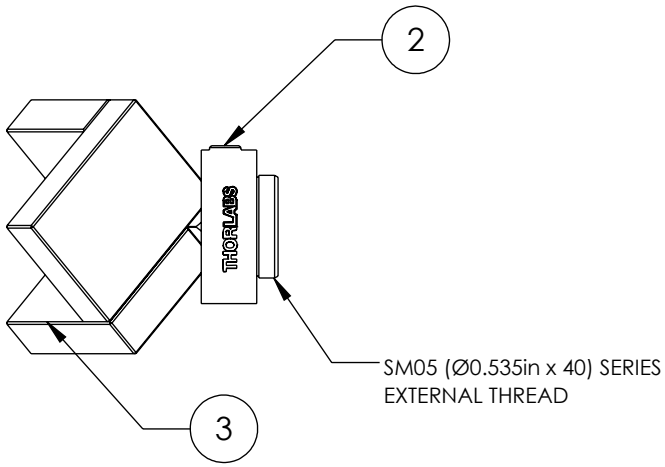

NOTES/SPECIFICATIONS:

1. SURFACE QUALITY: 40-20 SCRATCH-DIG
2. SURFACE FLATNESS: <λ/8 AT 633 nm
3. BEAM DEVIATION: <20 arcsec
4. COATING: PROTECTED SILVER
   Ravg: >97% FROM 450 nm - 2 µm PER SURFACE
   Ravg: >95% FROM 2 µm - 20 µm PER SURFACE
   AOI: 0° TO 45°

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	GG	28/JAN/19
APPROVAL	NI	18/NOV/22

COPYRIGHT © 2022 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

1" HOLLOW RETROREFLECTOR MIRROR PROTECTED SILVER

MATERIAL	REV
SEE TABLE	B

ITEM #	APPROX WEIGHT
HRR201-P01	23 g