



	PART	MATERIAL
1	RETROREFLECTOR MOUNT	STAINLESS STEEL
2	1.8" HOLLOW RETROREFLECTOR MIRROR UV-ENHANCED ALUMINUM	N-BK7
3	ENGRAVED SM1P1	ANODIZED ALUMINUM
4	2 x NYLON-TIPPED LOCKING SCREW, 5/64" HEX	STAINLESS STEEL

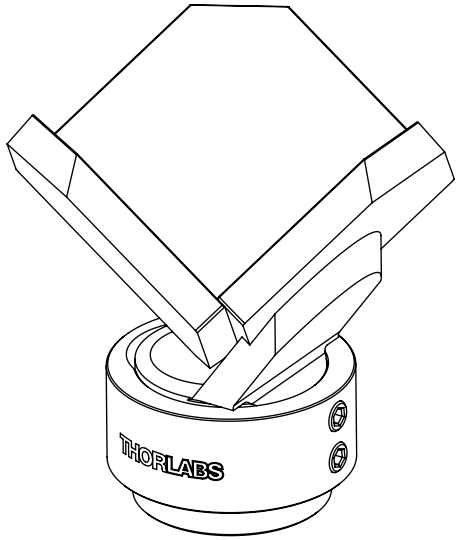

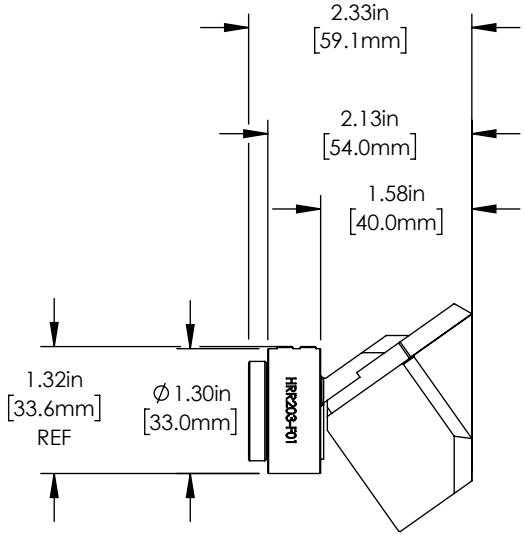

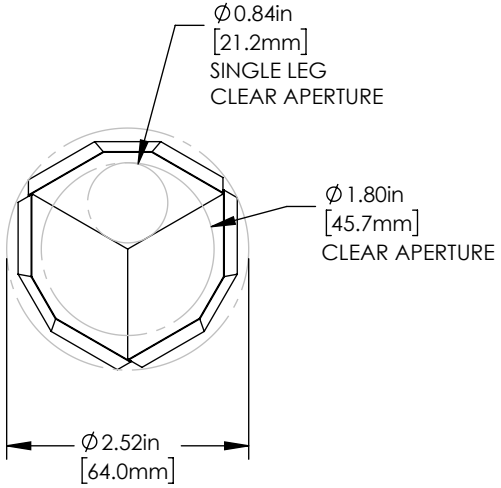

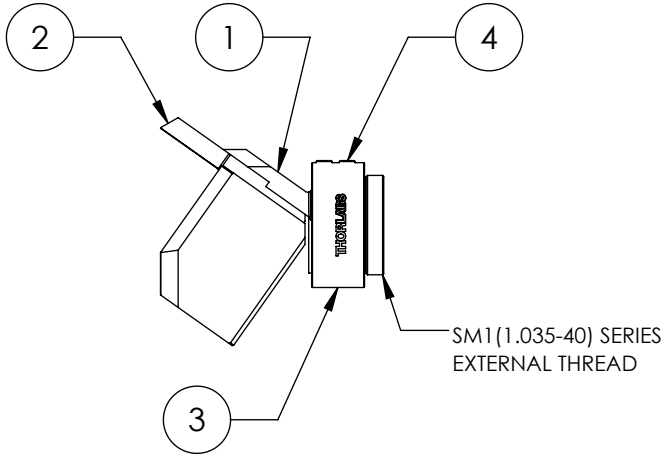

NOTES/SPECIFICATIONS:

1. SURFACE QUALITY: 40-20 SCRATCH-DIG
2. SURFACE FLATNESS: <λ/4 @ 633nm
3. BEAM DEVIATION: <20 arcsec
4. COATING: UV-ENHANCED ALUMINUM
   Ravg: >90% FROM 250nm - 450nm PER SURFACE
   AOI: 0° TO 45°

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	CS	23/AUG/22
APPROVAL	SG	26/AUG/22

COPYRIGHT © 2022 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

1.8" HOLLOW RETROREFLECTOR MIRROR UV-ENHANCED ALUMINUM

MATERIAL	REV
SEE TABLE	A

ITEM #	APPROX WEIGHT
HRR203-F01	110g