



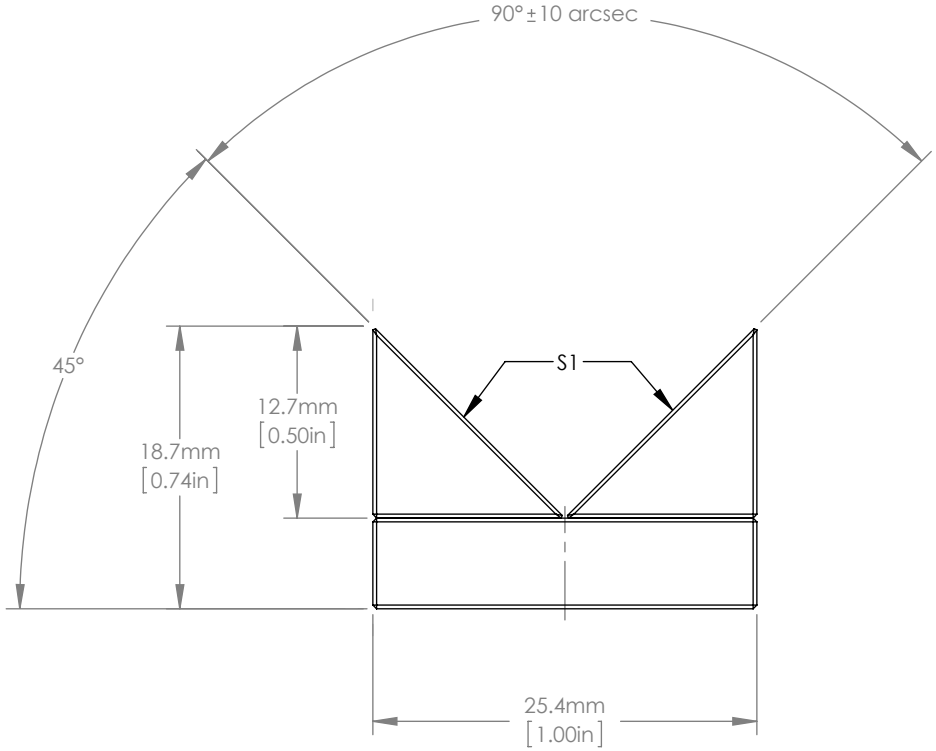

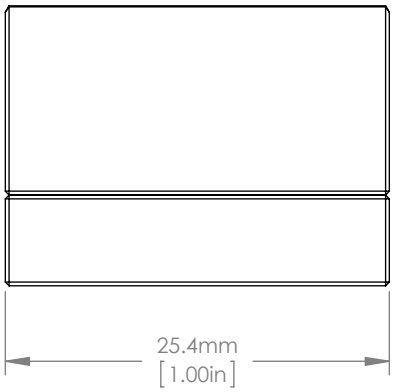

NOTES/SPECIFICATIONS:

1. CLEAR APERTURE: >80% OF FACE DIMENSIONS
2. SURFACE QUALITY(S1): 40-20 SCRATCH-DIG
3. SURFACE FLATNESS(S1): <λ/4 AT 633nm
4. REFLECTED WAVEFRONT ERROR: <0.5 WAVES
5. DIMENSIONAL TOLERANCE: ±0.2mm
6. COATING (S1): PROTECTED ALUMINUM
   Ravg: >90% FROM 450nm - 2µm
   Ravg: >95% FROM 2µm - 20µm
   AOI: 0° TO 45°

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	GG	10/MAR/16
APPROVAL	DD	10/MAR/16

COPYRIGHT © 2016 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

1" SQUARE HOLLOW ROOF MIRROR PROTECTED ALUMINUM

MATERIAL	REV
FUSED SILICA	A

ITEM #	APPROX WEIGHT
HRS1015-G01	18 g