

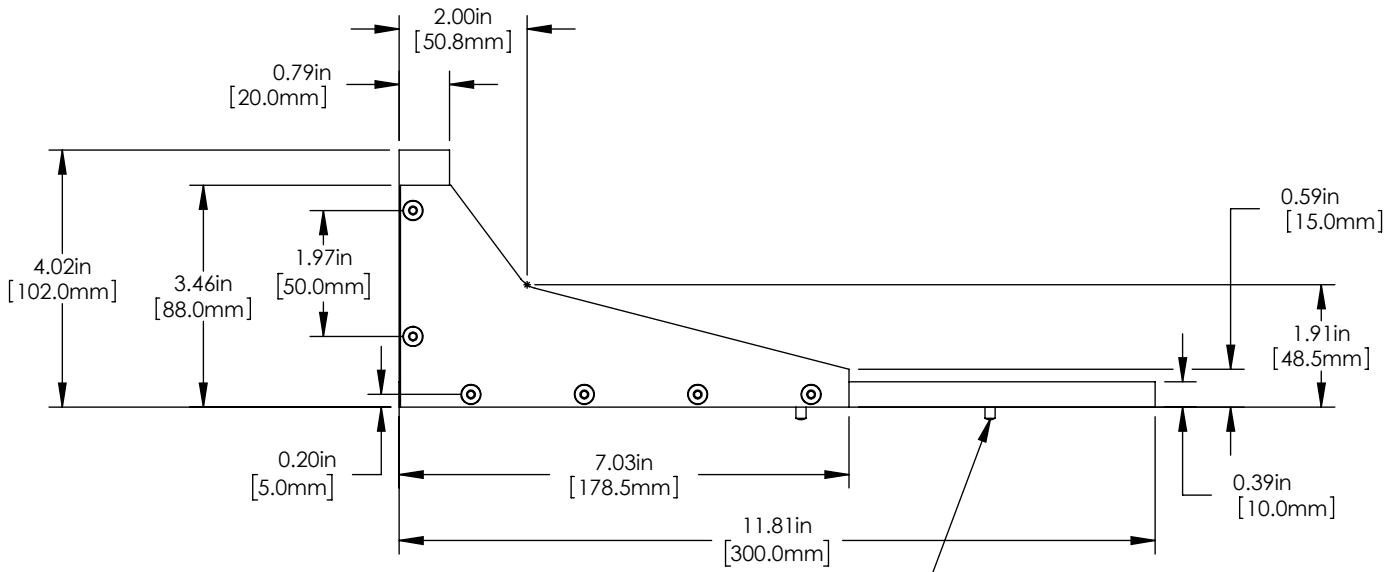


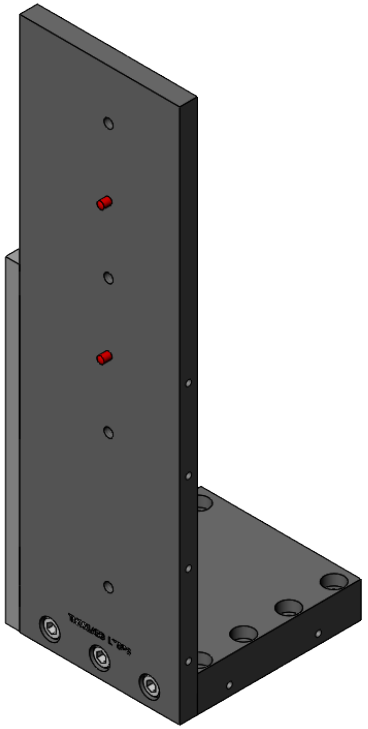

DOWEL PINS, REMOVABLE
⌀0.157in [4.0mm] X 0.40in [10.0mm] LONG
(2 PLACES)

COUNTERBORED HOLE
FOR 1/4"-20 UNC X 3/4"LONG
SOCKET CAP SCREWS
EQUISPACED 1 INCH [25.4mm] APART
(8 PLACES)

SUPPORT ARM CAN BE
UNBOLTED AND MOUNTED
ON OTHER SIDE
(IF REQUIRED)

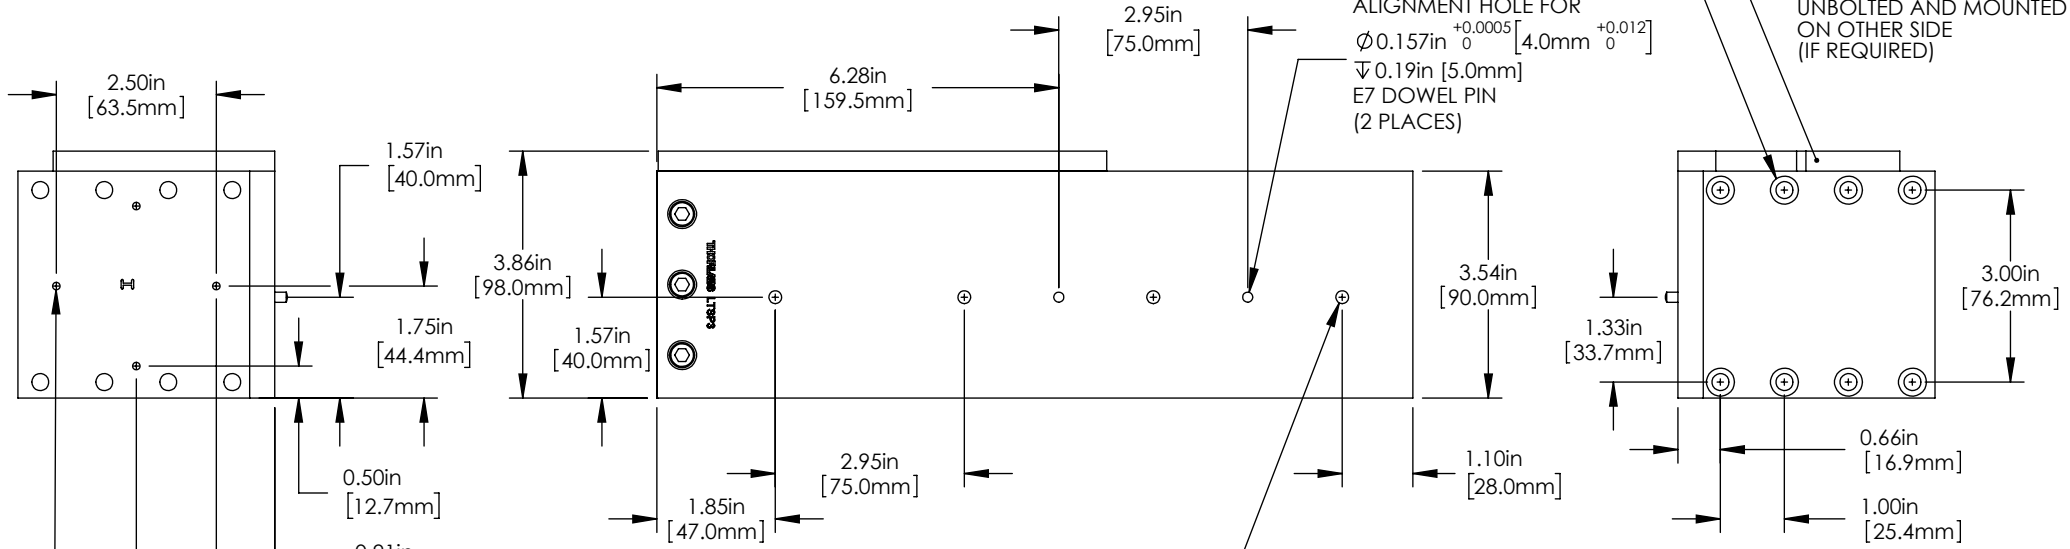

DOWEL HOLES
⌀0.12in H7 +0.0004 0 [3.0mm H7 +0.010 0] ↧0.20 in[5.0mm]
(4 PLACES)

1/4-20 UNC THREADED HOLES
FOR SECURING LTS STAGE,
EQUISPACED 2.95in [75.0mm] APART
(4 PLACES)

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	LV	20/MAY/26
APPROVAL	IK	20/MAY/26

COPYRIGHT © 2026 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS

THORLABS
www.thorlabs.com

Z BRACKET FOR IMPERIAL LTS300 STAGES

MATERIAL	REV
N/A	B
ITEM #	APPROX WEIGHT
LTSP3	1.2kg