

FIBER SPECIFICATIONS*					
FIBER TYPE	CORE DIAMETER	CLADDING DIAMETER	COATING DIAMETER	NA	OPERATING WAVELENGTH
FG105LCA	105 +1/-3 µm	125 +1/-2 µm	250 ±10 µm	0.22 ± 0.02	400 - 2400 nm

*SPECIFICATIONS BASED ON BARE-FIBER DATA.

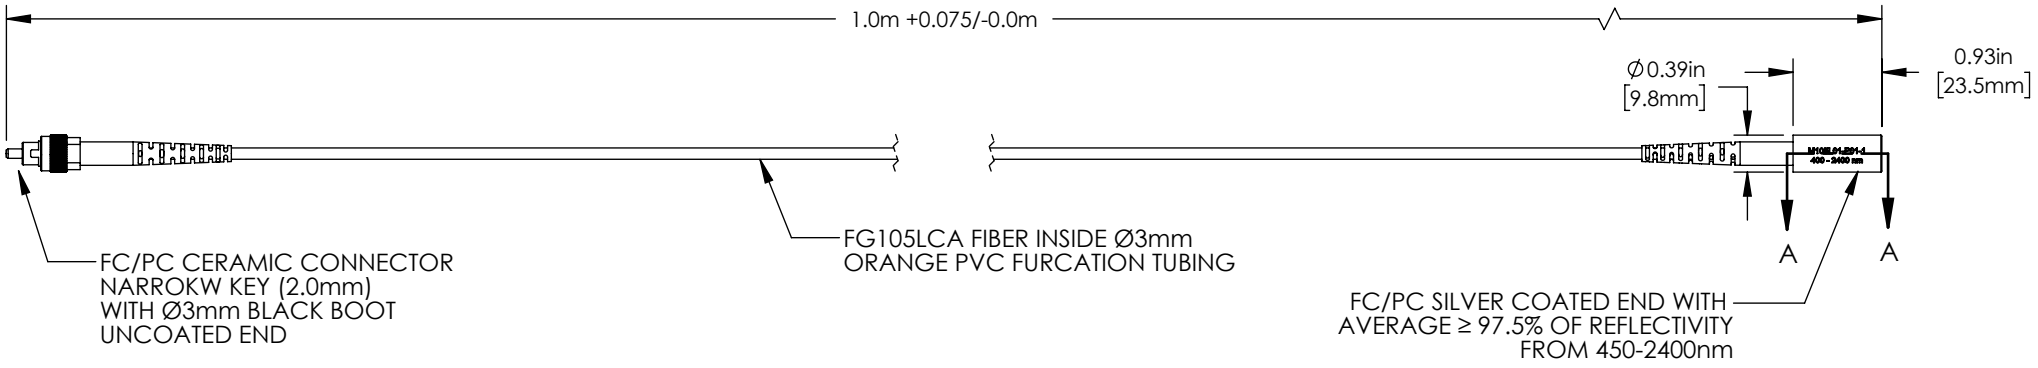

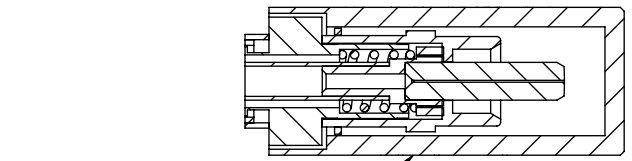

SECTION A-A
SCALE 2 : 1

INCLUDED BUT NOT SHOWN:
- PROTECTIVE DUST CAPS

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	JB	02/FEB/13
APPROVAL	HC	19/APR/22

COPYRIGHT © 2018 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

MM RETROREFLECTOR CABLE, 450-2400nm, FC/PC,1m

MATERIAL	REV
N/A	K

ITEM #	APPROX WEIGHT
M105L01-P01-1	.03 kg