



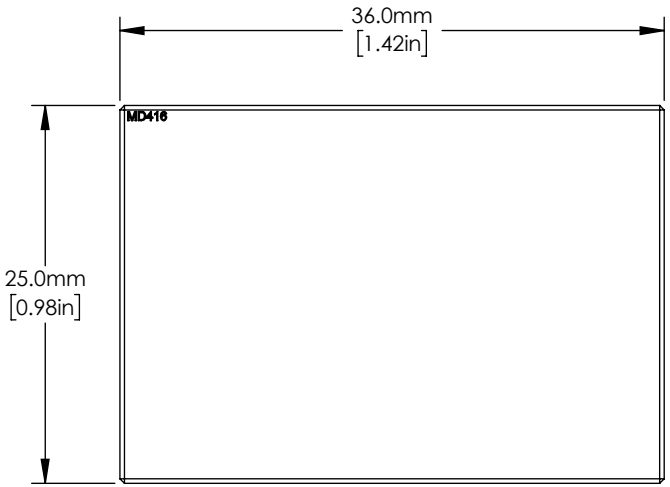

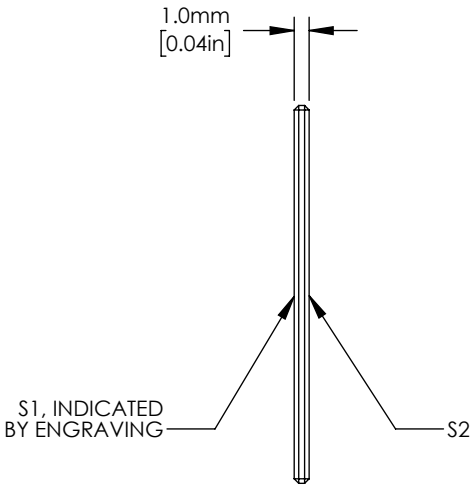

NOTES/SPECIFICATIONS:

1. CLEAR APERTURE: >22.5 x 32.4 mm
2. SURFACE QUALITY(S1,S2): 60-40 SCRATCH-DIG
3. SURFACE FLATNESS (S1,S2): <λ/2 AT 633 nm
4. PARALLELISM: <3 arcmin
5. DIMENSIONAL TOLERANCE: ±0.1 mm
6. FILTER COATING (S1)
   REFLECTION BAND (R): >90% AVERAGE 360-407 nm
   TRANSMISSION BAND (T): >90% ABSOLUTE 425-575 nm
   AOI: 45°±1.5°
7. AR COATING (S2)
   R: <2% ABSOLUTE 400-800 nm, 45° AOI

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	CFS	27/OCT/14
APPROVAL	PH	10/MAY/24

COPYRIGHT © 2014 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

BFP DICHROIC FILTER

MATERIAL	REV
UV FUSED SILICA	D

ITEM #	APPROX WEIGHT
MD416	2 g