
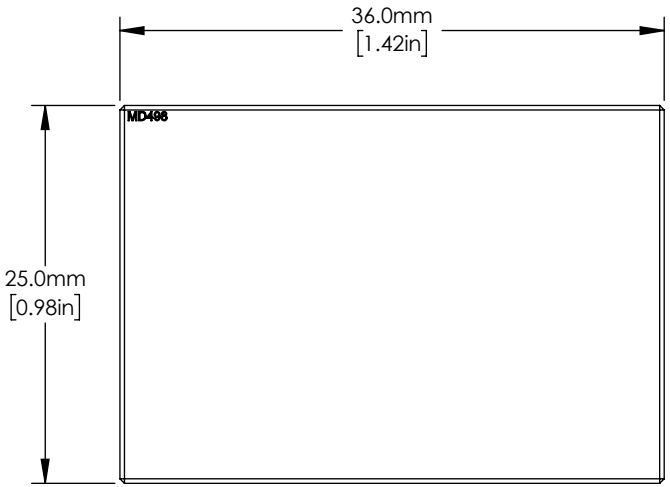


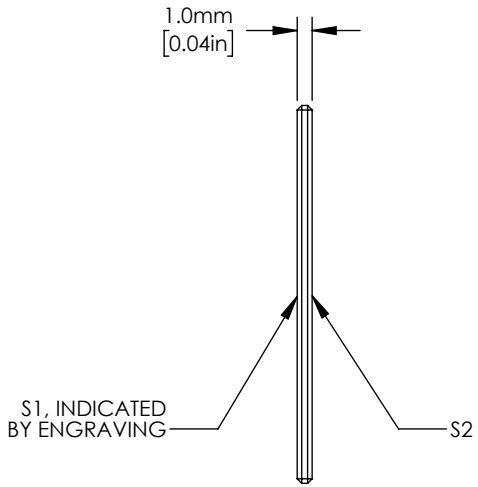


NOTES/SPECIFICATIONS:

1. CLEAR APERTURE: >22.5 x 32.4 mm
2. SURFACE QUALITY(S1,S2): 60-40 SCRATCH-DIG
3. SURFACE FLATNESS (S1,S2): <λ/2 AT 633 nm
4. PARALLELISM: <3 arcmin
5. DIMENSIONAL TOLERANCE: ±0.1 mm
6. FILTER COATING (S1)
   - REFLECTION BAND (R): >90% AVERAGE 452-490 nm
   - TRANSMISSION BAND (T): >90% ABSOLUTE 505-800 nm
   - AOI: 45°±1.5°
7. AR COATING (S2)
   - R: <2% ABSOLUTE 400-800 nm, 45° AOI

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

| DRAWING PROJECTION | | |
|---|---|---|
| | NAME | DATE |
| DRAWN | CFS | 27/OCT/14 |
| APPROVAL | PH | 10/MAY/24 |

COPYRIGHT © 2014 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

GFP DICHROIC FILTER

| MATERIAL | REV |
|---|---|
| UV FUSED SILICA | D |

| ITEM # | APPROX WEIGHT |
|---|---|
| MD498 | 2 g |