
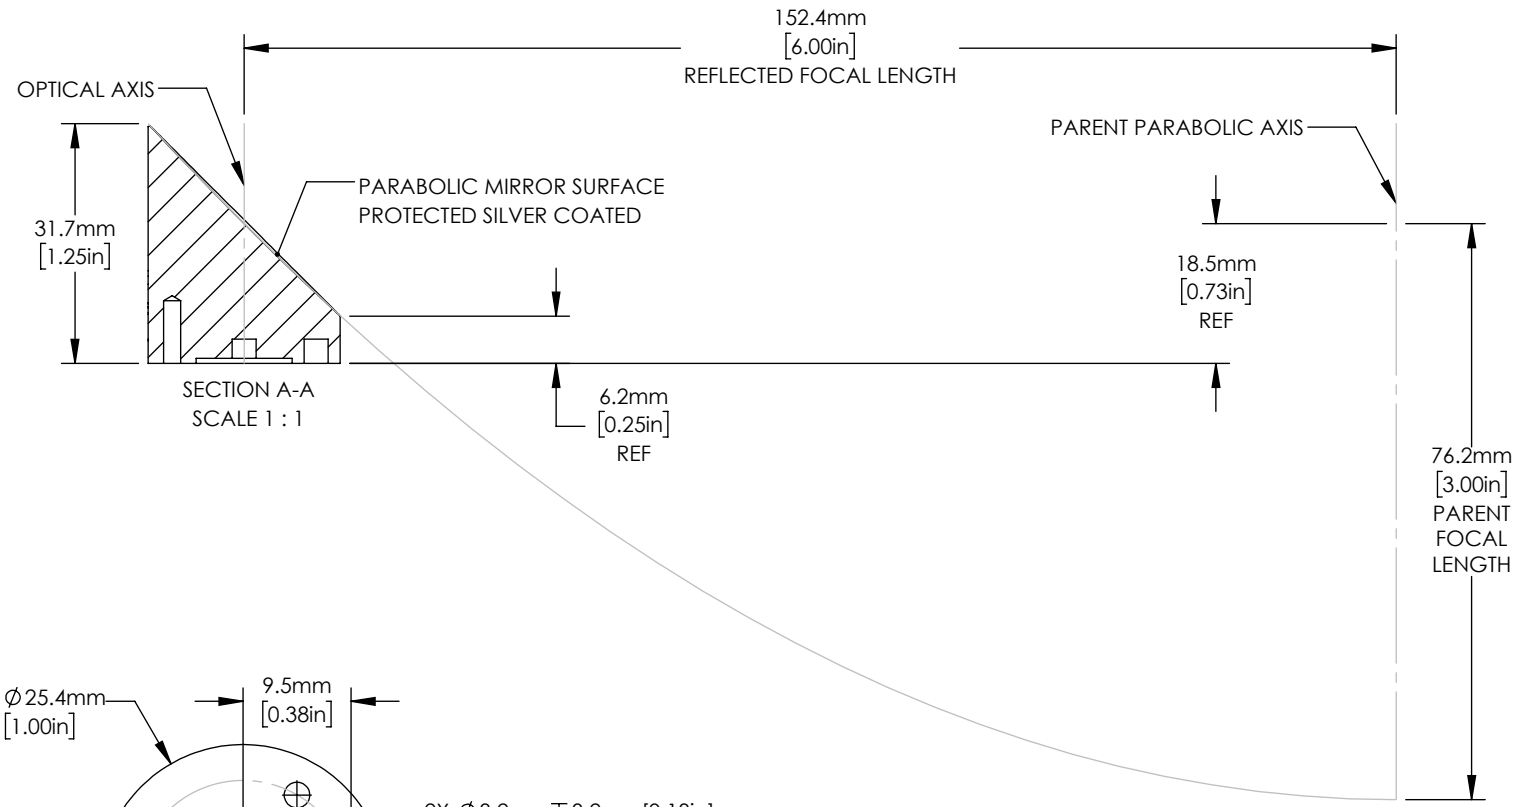


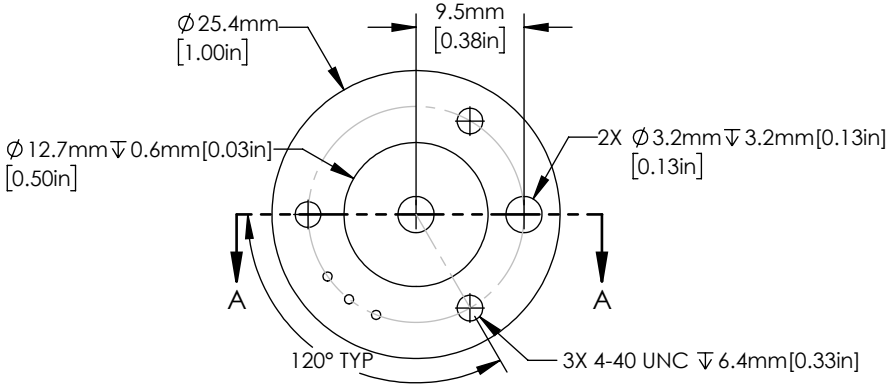


NOTES/SPECIFICATIONS:

1. PARENT FOCAL LENGTH: 76.2 mm ± 1%
2. REFLECTED FOCAL LENGTH: 152.4 mm ± 1% AT 90°
3. CLEAR APERTURE: >90% OF DIAMETER
4. REFLECTED WAVEFRONT ERROR: <λ/4 RMS AT 633 nm
5. SURFACE QUALITY: 40-20 SCRATCH-DIG
6. SURFACE ROUGHNESS: <100 Å RMS
7. OPTICAL COATING: PROTECTED SILVER
   - Ravg: >97% FROM 450 nm - 2 µm
   - Ravg: >95% FROM 2 µm - 20 µm
8. BLACK ANODIZED FINISH (NON-OPTICAL SURFACES)

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

| DRAWING PROJECTION | | |
|---|---|---|
| | NAME | DATE |
| DRAWN | LM | 25/NOV/14 |
| APPROVAL | NI | 16/JUN/23 |

COPYRIGHT © 2014 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

⌀25.4 mm, 90° OAP, RFL = 152.4 mm, PROTECTED SILVER COATED

| MATERIAL | REV |
|---|---|
| 6061-T6 ALUMINUM | D |

| ITEM # | APPROX WEIGHT |
|---|---|
| MPD169-P01 | 25 g |