

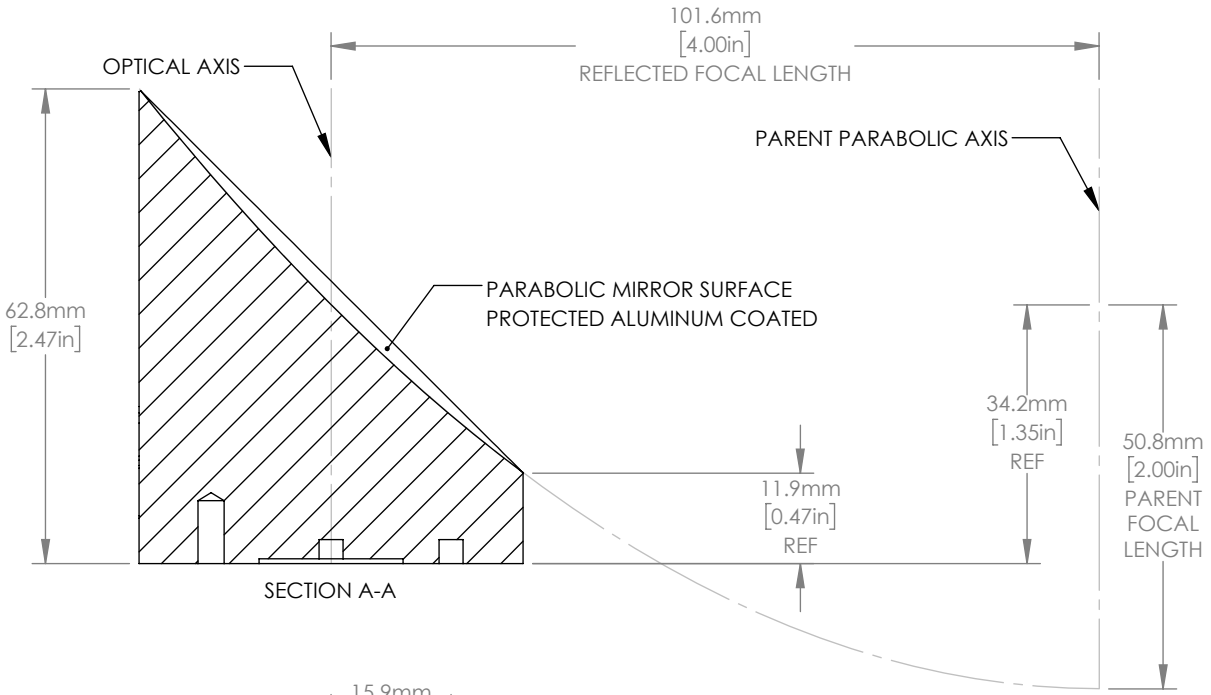


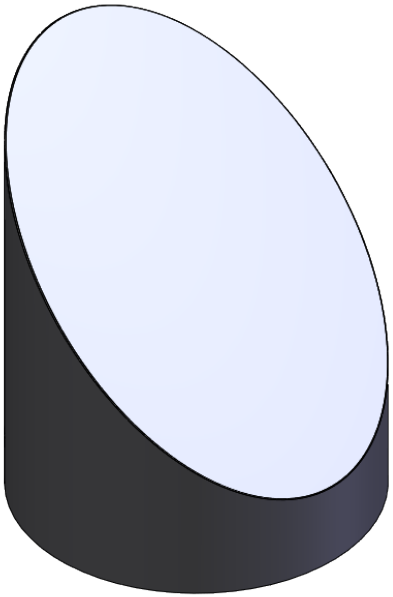

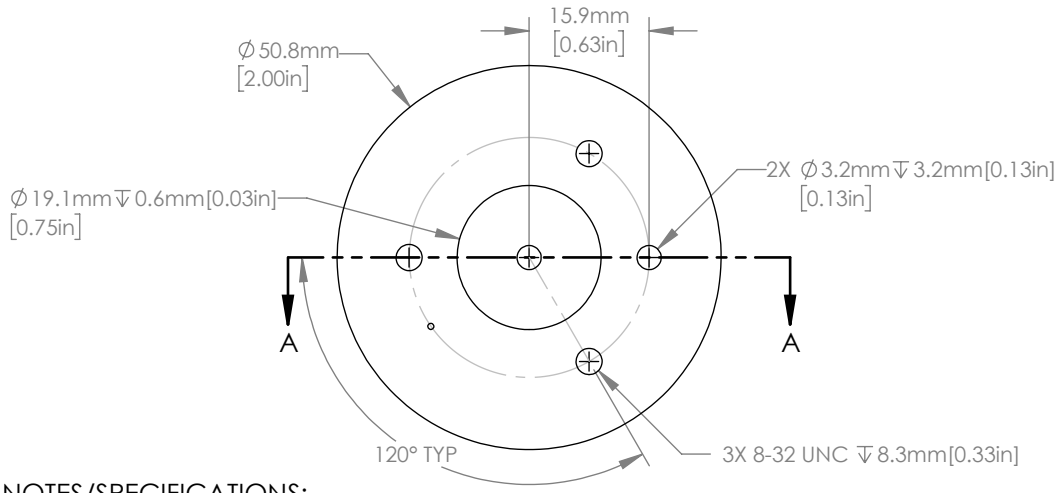

NOTES/SPECIFICATIONS:

1. PARENT FOCAL LENGTH: 50.8 mm ± 1%
2. REFLECTED FOCAL LENGTH: 101.6 mm ± 1% AT 90°
3. CLEAR APERTURE: >90% OF DIAMETER
4. REFLECTED WAVEFRONT ERROR: <λ/4 RMS AT 633 nm
5. SURFACE QUALITY: 40-20 SCRATCH-DIG
6. SURFACE ROUGHNESS: <100 Å RMS
7. OPTICAL COATING: PROTECTED ALUMINUM
   - Ravg: >90% FROM 450 nm - 2 µm
   - Ravg: >95% FROM 2 µm - 20 µm
8. BLACK ANODIZED FINISH (NON-OPTICAL SURFACES)

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	LM	03/DEC/14
APPROVAL	ST	16/AUG/21

COPYRIGHT © 2021 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

⌀50.8 mm, 90° OAP, RFL = 101.6 mm, PROTECTED ALUMINUM COATED

MATERIAL	REV
6061-T6 ALUMINUM	B

ITEM #	APPROX WEIGHT
MPD249-G01	195 g