
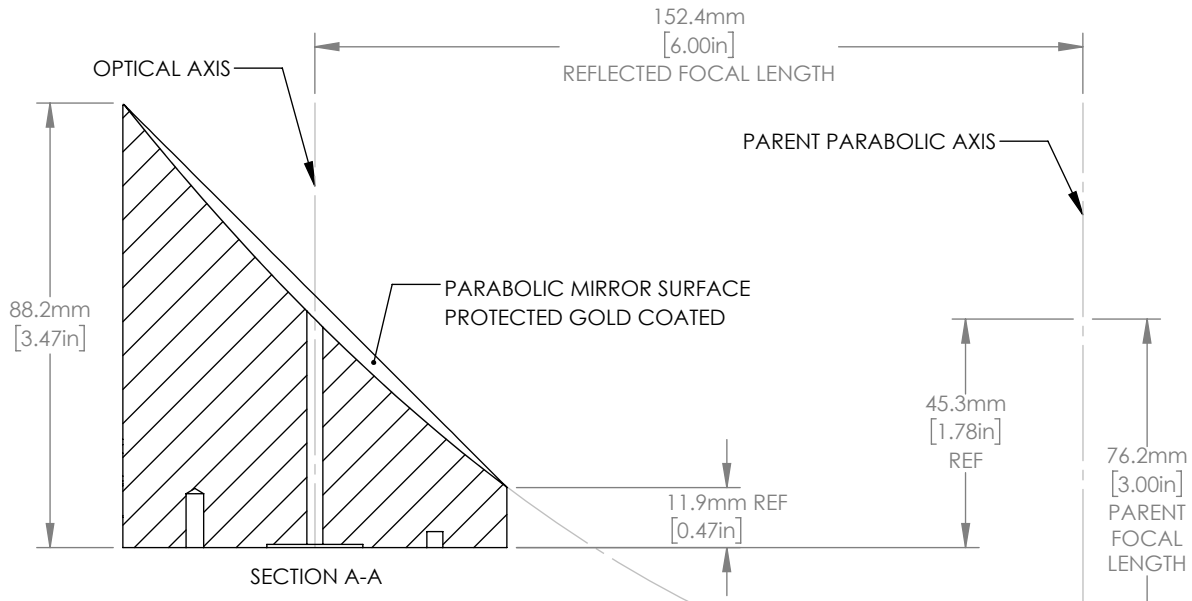
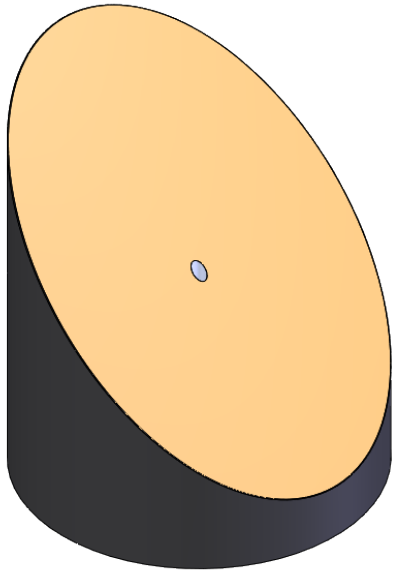


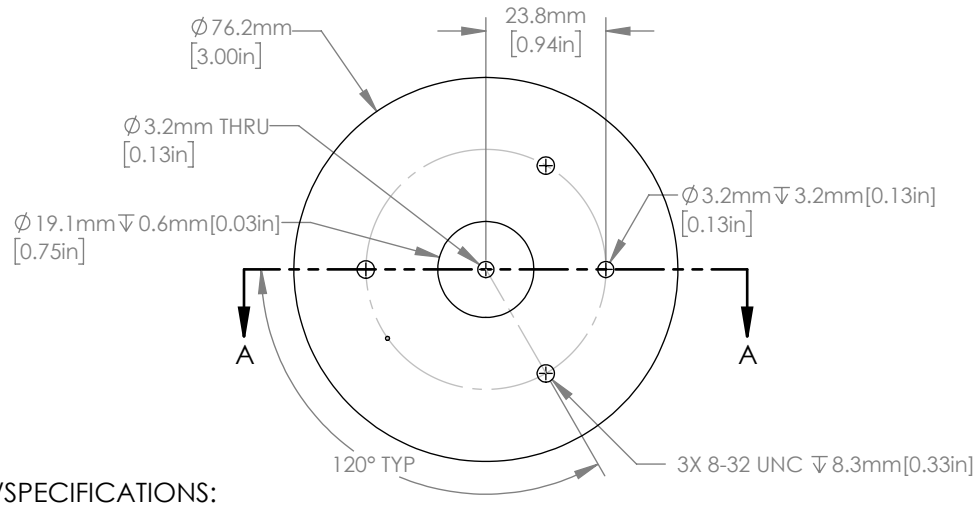


NOTES/SPECIFICATIONS:

1. PARENT FOCAL LENGTH: 76.2 mm ± 1%
2. REFLECTED FOCAL LENGTH: 152.4 mm ± 1% AT 90°
3. CLEAR APERTURE: >90% OF DIAMETER
4. REFLECTED WAVEFRONT ERROR: <λ/2 RMS AT 633 nm
5. SURFACE QUALITY: 40-20 SCRATCH-DIG
6. SURFACE ROUGHNESS: <100 Å RMS
7. OPTICAL COATING: PROTECTED GOLD
   Ravg >96% FROM 800 nm - 20 µm
8. BLACK ANODIZED FINISH (NON-OPTICAL SURFACES)

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

| DRAWING PROJECTION | | |
|---|---|---|
| | NAME | DATE |
| DRAWN | CFS | 29/SEP/14 |
| APPROVAL | ST | 16/AUG/21 |

COPYRIGHT © 2021 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

∅76.2 mm, 90° OAP, RFL = 152.4 mm, 3 mm COAXIAL HOLE, PROTECTED GOLD

| MATERIAL | REV |
|---|---|
| 6061-T6 ALUMINUM | E |

| ITEM # | APPROX WEIGHT |
|---|---|
| MPD369V-M01 | 585 g |