
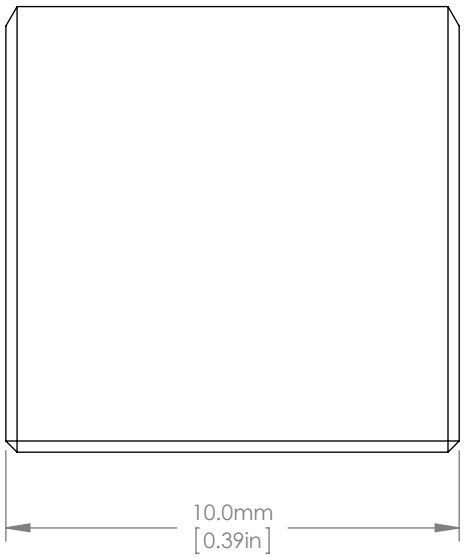


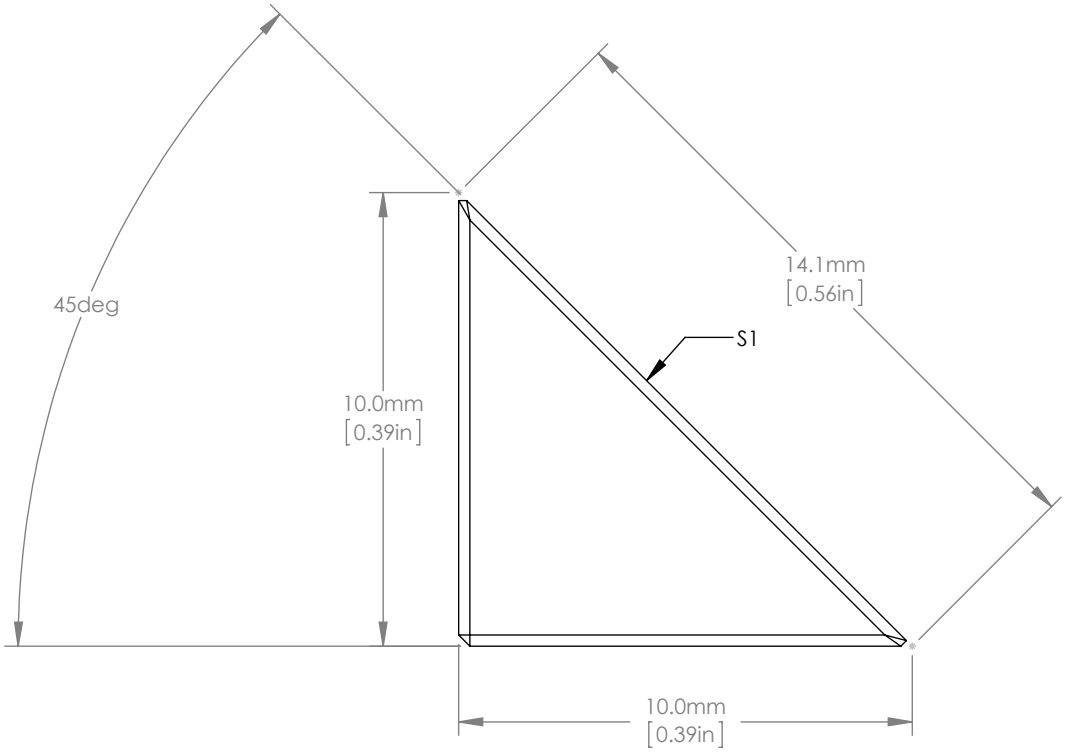


NOTES/SPECIFICATIONS:

1. CLEAR APERTURE: 70% OF FACE LENGTH AND WIDTH
2. SURFACE QUALITY: 10-5 SCRATCH-DIG
3. SURFACE FLATNESS: λ/ 10 AT 633nm
4. DIMENSIONAL TOLERANCES: ±0.1 mm
5. ANGULAR TOLERANCES: ±3 arcmin
6. COATING (S1): E02 BROADBAND HR, DIELECTRIC
   WAVELENGTH RANGE: 400-750nm
   RS AND RP > 99% Ravg OVER WAVELENGTH RANGE
   AOI: 0 TO 45 deg

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

| DRAWING PROJECTION | | |
|---|---|---|
| | NAME | DATE |
| DRAWN | EMT | 09/MAY/12 |
| APPROVAL | WD | 12/JUL/12 |

COPYRIGHT © 2012 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

10.0mm RIGHT ANGLE PRISM
BROADBAND DIELECTRIC MIRROR

| MATERIAL | REV |
|---|---|
| N-BK7 | B |

| ITEM # | APPROX WEIGHT |
|---|---|
| MRA10-E02 | 0.001 kg |