



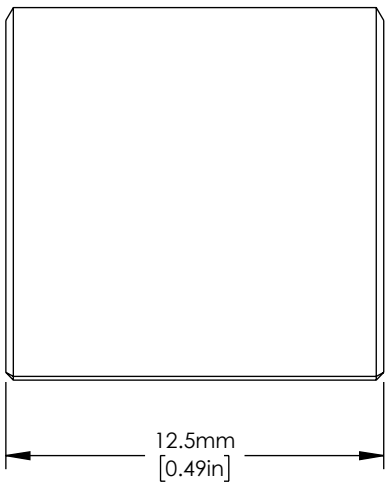

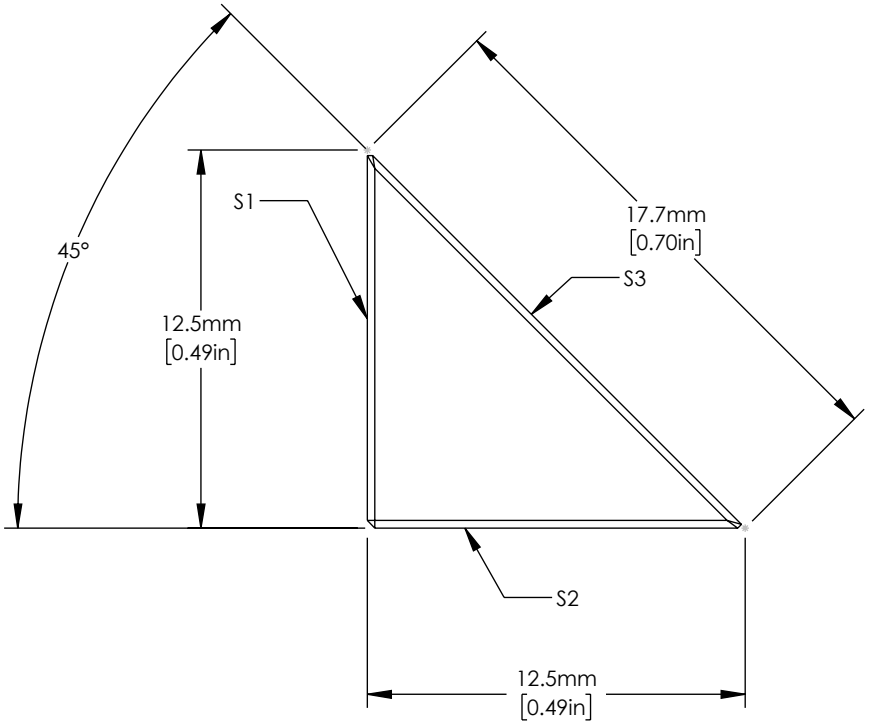

NOTES/SPECIFICATIONS:

1. DIMENSIONAL TOLERANCES: ±0.1 mm
2. ANGULAR TOLERANCE: ±3 arcmin
3. SURFACE QUALITY (S1, S2, S3): 40-20 SCRATCH-DIG
4. SURFACE FLATNESS (S1, S2, S3): : λ/10 @ 633 nm
5. CLEAR APERTURE (S1, S2, S3): 70% OF FACE, LENGTH, AND WIDTH
6. COATING (S3): PROTECTED SILVER
   Ravg:>97% FROM 450 nm-2 µm
   Ravg:>95% FROM 2 µm-20 µm
   AOI: 0° TO 45° deg

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	CS	13/MAR/13
APPROVAL	NI	18/NOV/22

COPYRIGHT © 2022 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

12.5 mm RIGHT ANGLE PROTECTED SILVER MIRROR

MATERIAL	REV
N-BK7	C

ITEM #	APPROX WEIGHT
MRA12-P01	0.002 kg