
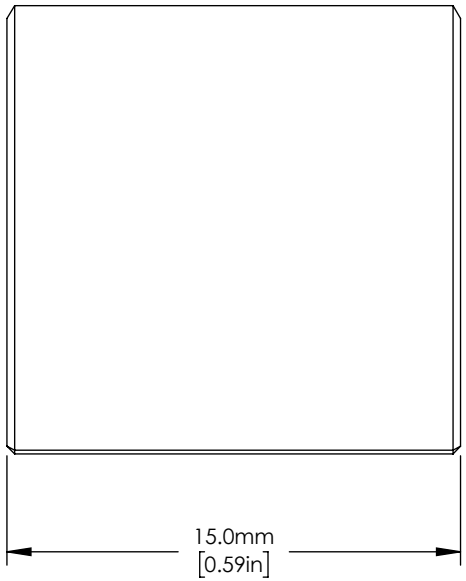


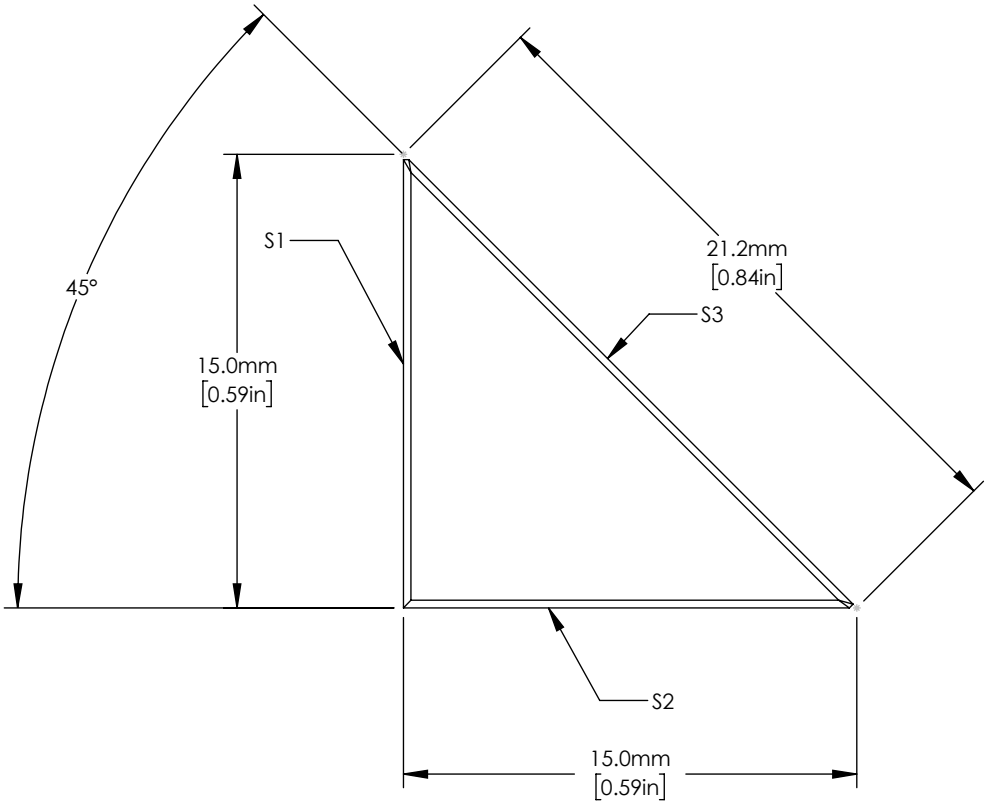


NOTES/SPECIFICATIONS:

1. DIMENSIONAL TOLERANCES: ±0.1 mm
2. ANGULAR TOLERANCE: ±3 arcmin
3. SURFACE QUALITY (S1, S2, S3): 40-20 SCRATCH-DIG
4. SURFACE FLATNESS (S1, S2, S3): : λ/10 @ 633 nm
5. CLEAR APERTURE (S1, S2, S3): 70% OF FACE, LENGTH, AND WIDTH
6. COATING (S3): PROTECTED ALUMINUM
   Ravg:>90% FROM 450 nm-2 µm
   Ravg:>95% FROM 2.0 µm -20 µm
   AOI: 0 TO 45 deg

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

| DRAWING PROJECTION | | |
|---|---|---|
| | NAME | DATE |
| DRAWN | CS | 13/MAR/13 |
| APPROVAL | DS | 16/SEP/21 |

COPYRIGHT © 2021 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

15.0 mm RIGHT ANGLE PROTECTED ALUMINUM MIRROR

| MATERIAL | REV |
|---|---|
| N-BK7 | B |
| ITEM # | APPROX WEIGHT |
| MRA15-G01 | 0.004 kg |