



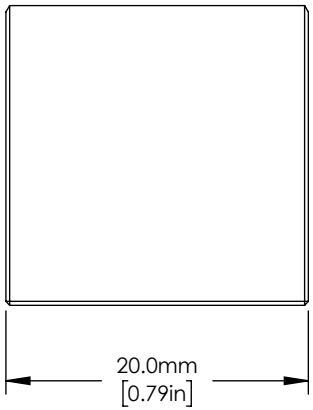

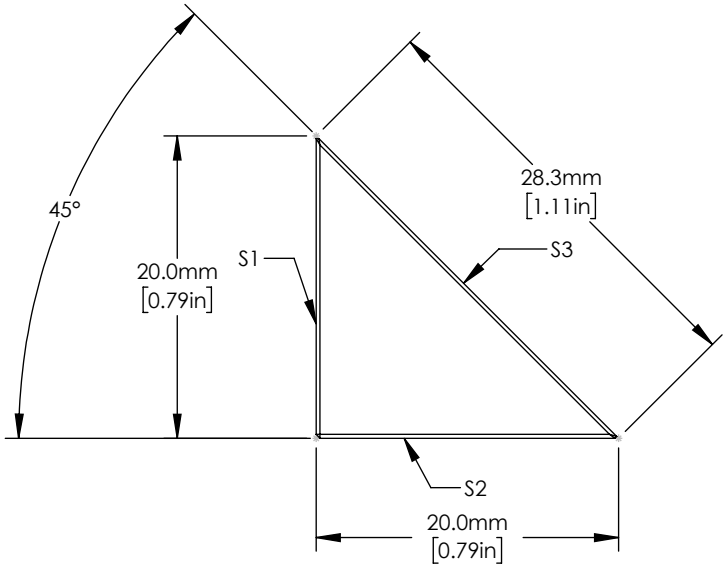

NOTES/SPECIFICATIONS:

1. CLEAR APERTURE(S1, S2, S3): 70% OF FACE LENGTH AND WIDTH
2. SURFACE QUALITY(S1, S2, S3): 40-20 SCRATCH-DIG
3. SURFACE FLATNESS(S1, S2, S3): λ/ 10 AT 633 nm
4. DIMENSIONAL TOLERANCES: ±0.1 mm
5. ANGULAR TOLERANCES: ±3 arcmin
6. COATING (S3): PROTECTED ALUMINUM
   Ravg:>90% FROM 450 nm-2 µm
   Ravg:>95% FROM 2.0 µm -20 µm
   AOI: 0 TO 45 deg

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	EMT	09/MAY/12
APPROVAL	DS	16/SEP/21

COPYRIGHT © 2021 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

20.0 mm RIGHT ANGLE PROTECTED ALUMINUM MIRROR

MATERIAL	REV
N-BK7	C

ITEM #	APPROX WEIGHT
MRA20-G01	0.01 kg