



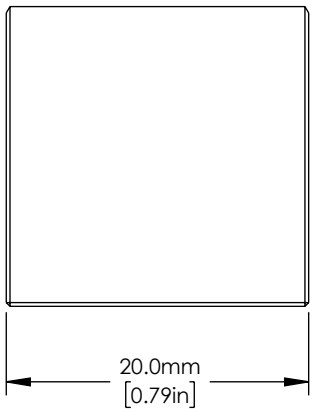

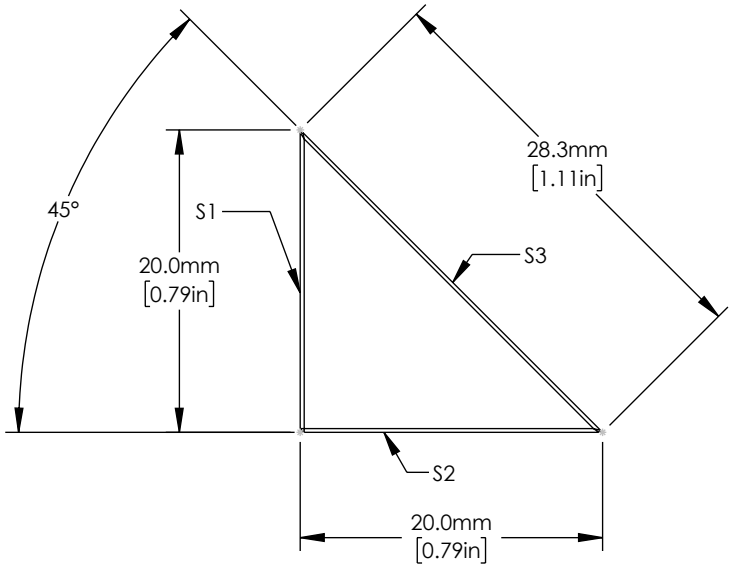

NOTES/SPECIFICATIONS:

1. CLEAR APERTURE(S1, S2, S3): 70% OF FACE LENGTH AND WIDTH
2. SURFACE QUALITY(S1, S2, S3): 40-20 SCRATCH-DIG
3. SURFACE FLATNESS(S1, S2, S3): λ/ 10 AT 633 nm
4. DIMENSIONAL TOLERANCES: ±0.1 mm
5. ANGULAR TOLERANCES: ±3 arcmin
6. COATING (S3): PROTECTED SILVER
   - Ravg:>97% FROM 450 nm-2 µm
   - Ravg:>95% FROM 2 µm-20 µm
   - AOI: 0° TO 45° deg

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	EMT	09/MAY/12
APPROVAL	NI	18/NOV/22

COPYRIGHT © 2022 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

20.0 mm RIGHT ANGLE PROTECTED SILVER MIRROR

MATERIAL	REV
N-BK7	D

ITEM #	APPROX WEIGHT
MRA20-P01	0.01 kg