



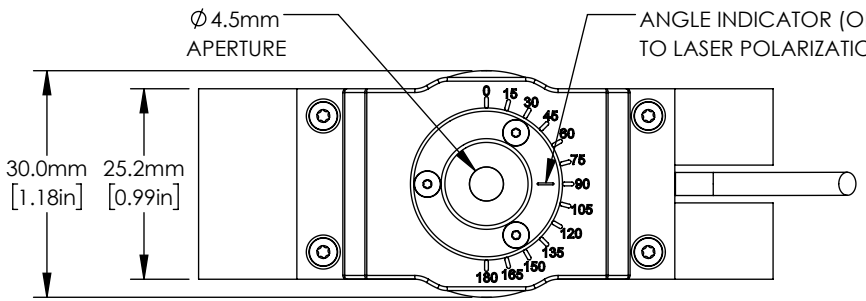


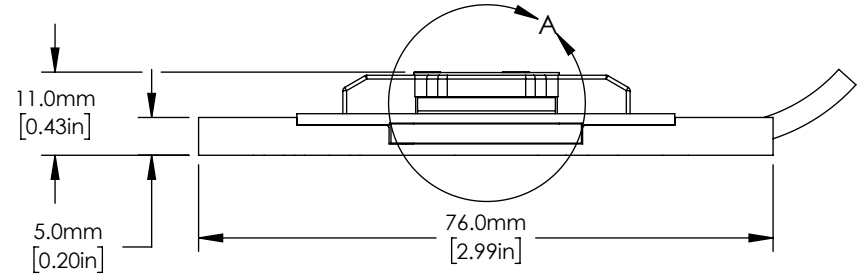


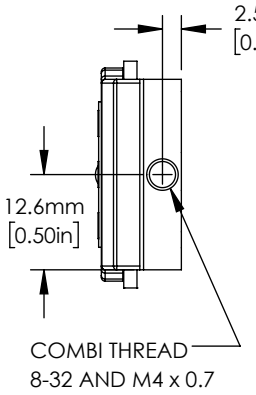


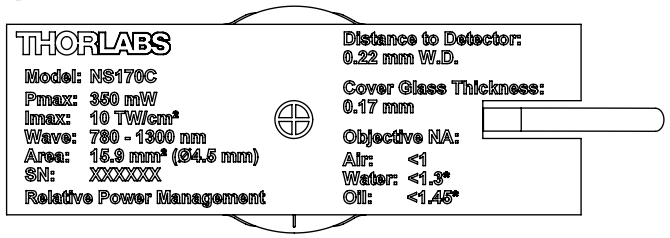

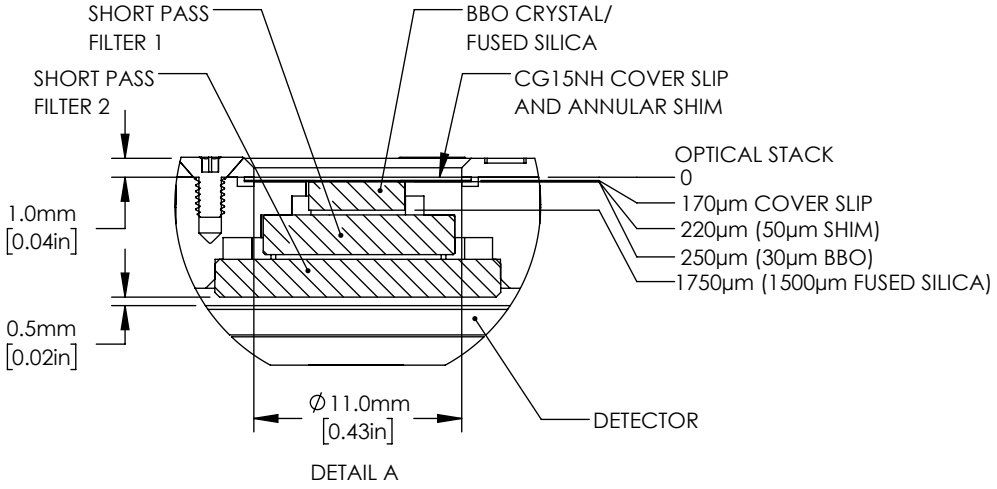


DETAIL A

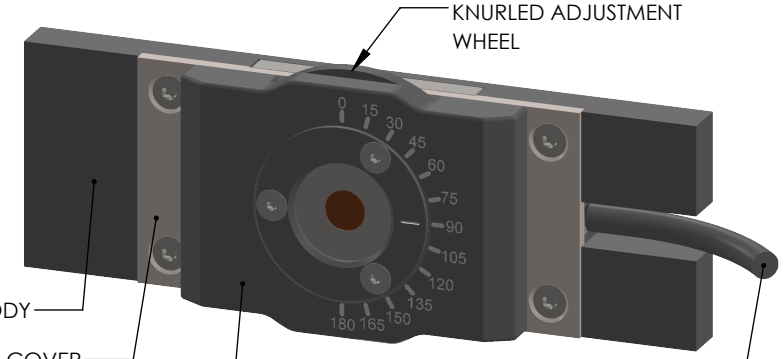

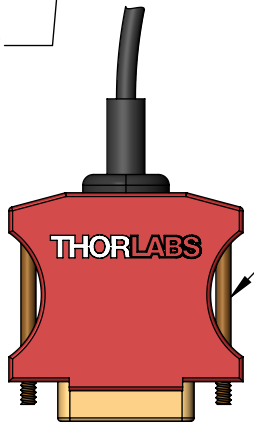

SELF FIXING MECHANISM
SLIGHTLY PRESS FROM BOTH
SIDES FOR PLUGGING AND
UNPLUGGING



DE09 CONNECTOR PIN DIAGRAM	
2	EEPROM DATA
3	PD ANODE (GROUND)
4	PD CATHODE
6	EEPROM GROUND
1, 5, 7, 8, 9	N.C.

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	RW	22/JAN/24
APPROVAL	SD	22/JAN/24

COPYRIGHT © 2024 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

PEAK INTENSITY SENSOR FOR
TWO-PHOTON LASERS, 780 - 1300 nm

MATERIAL	REV
N/A	A

ITEM #	APPROX WEIGHT
NS170C	80.0 g